

Stravibase SpringBox^{*} Datasheet

Stravibase SpringBox are [pre-compressed spring bearings](#) for structural isolation of buildings and structures.





SYSTEM FEATURES

- Can be designed to meet natural frequencies anywhere between 3Hz and 5Hz
- Easily replaceable
- Limits deflection of the building during construction
- Easy to install
- Lifespan greater than 50 years
- High lateral stiffness
- Easily adapted to meet different loads and performance requirements
- Hot dip galvanized steel
- To design the Stravibase SpringBox structural isolation bearings CDM Stravitec's engineers require the following information:
 - Natural frequency requirement
 - Working Dead and Live loads on each contact point
 - Lateral and turning forces at each support point
 - Contact areas and dimensions as well as locations of any fixing down bolts
 - Fire protection requirements
 - Maximum likely dynamic forces caused by earthquakes etc..

*Previously known as CDM-CHR-BOX



TYPICAL ASSEMBLIES

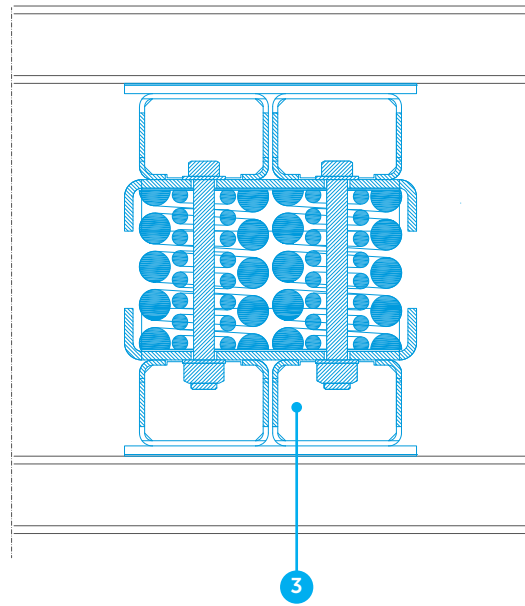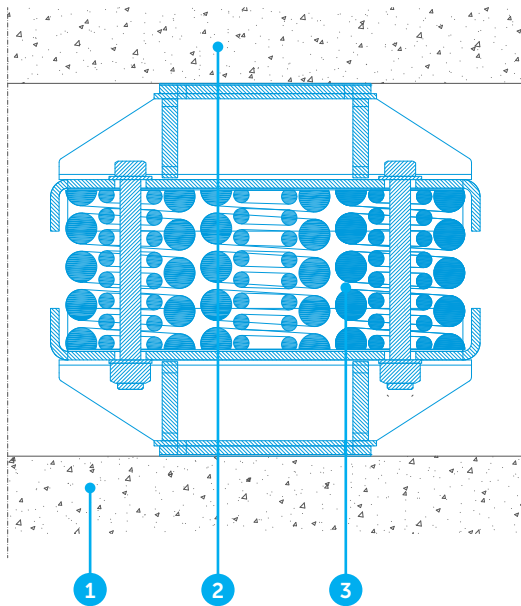

1. Supporting structure
2. Decoupled structure
3. Stravibase SpringBox

DISCLAIMER

This information is accurate to the best of our knowledge at the time of issue. Information, data and recommendations provided are based on industry accepted testing and prior product usage. It is intended as descriptive of the general capabilities and performance of our products and does not endorse applicability for any particular project. We reserve the right to change products, performance, and data without notice. This document replaces all information supplied prior to the publication hereof.