


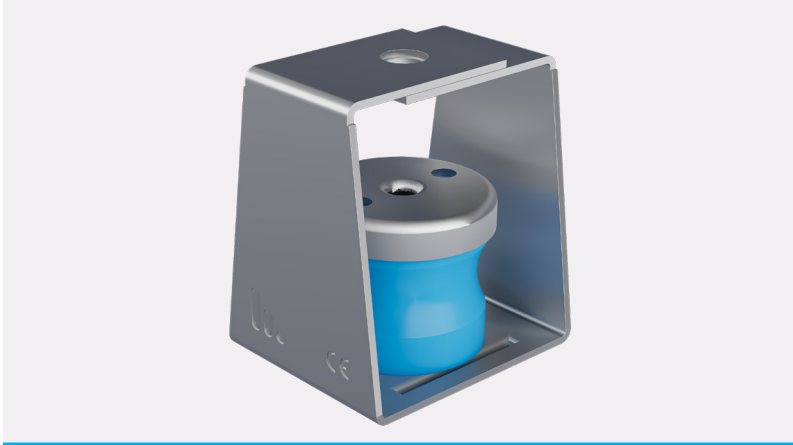

Scan here for access to
solution website page
for other documents


Stravilink DCH-P

Datasheet

Stravilink DCH-P is a Drop Ceiling Hanger with Elastomeric Pads designed to fit most ceiling voids and seamlessly integrate with all ceiling types. It enhances sound insulation between vertically stacked rooms, ensuring optimal acoustic performance.

FEATURES

- Equipped with elastomeric pads featuring a natural frequency of around 8 Hz at design load
- Available in different elastomeric pad options, supporting loads from 10 to 78.5 kg
- Colour-coded elastomeric pads are available for different load ranges, making it easy to verify on-site that the correct pad is used
- Suitable for installation on various structures, including concrete and cross-laminated timber (CLT) slabs
- Interfaces seamlessly with all ceiling types
- Compact frame (62.8 mm) allows installation in most acoustic suspended ceiling voids
- Supports variable void depths
- Elastomeric pad extends beyond the metal frame, preventing the rod from short-circuiting with the frame
- Simple and fast installation process
- Suitable for supporting low to medium-load ductwork, pipes, and speakers

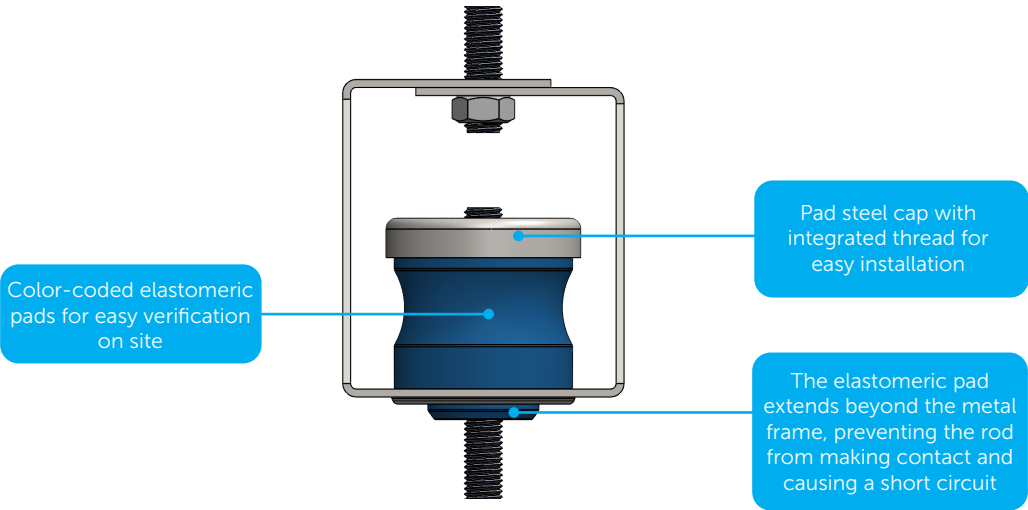

PACKAGING

Model	Reference	Quantity per Box	Weight per Box [kg]	Dimension of Box [cm]
Stravilink DCH-P240	001979	50	6.75	29 x 23.5 x 17.2
Stravilink DCH-P360	001980	50	6.78	29 x 23.5 x 17.2
Stravilink DCH-P625	002609	50	6.78	29 x 23.5 x 17.2



PHYSICAL & MECHANICAL PROPERTIES

Model	Design Load		Resonance Frequency at Design Load	Load Range (per Hanger)		Pad Colour
	kg	N		kg	N	
Stravilink DCH-P240	24	240	7.5	10 - 30	100 - 300	Sky Blue ●
Stravilink DCH-P360	36	360	8.5	20 - 45	200 - 450	Silver Grey ●
Stravilink DCH-P625	62.5	625	9.0	30 - 78.5	300 - 785	Dark Blue ●

Notes:


Admissible load of steel elements: 1157.25 N.

Products are suited up to a C2 environment (atmosphere with little or no degree of pollution).

The temperature range of use is between -30°C and 70°C.

To assess which type is appropriate the following information is needed:

- 1) The weight and construction of the supported ceiling - this will determine the type of hanger;
- 2) The weights and support locations of any items hung from the ceiling.

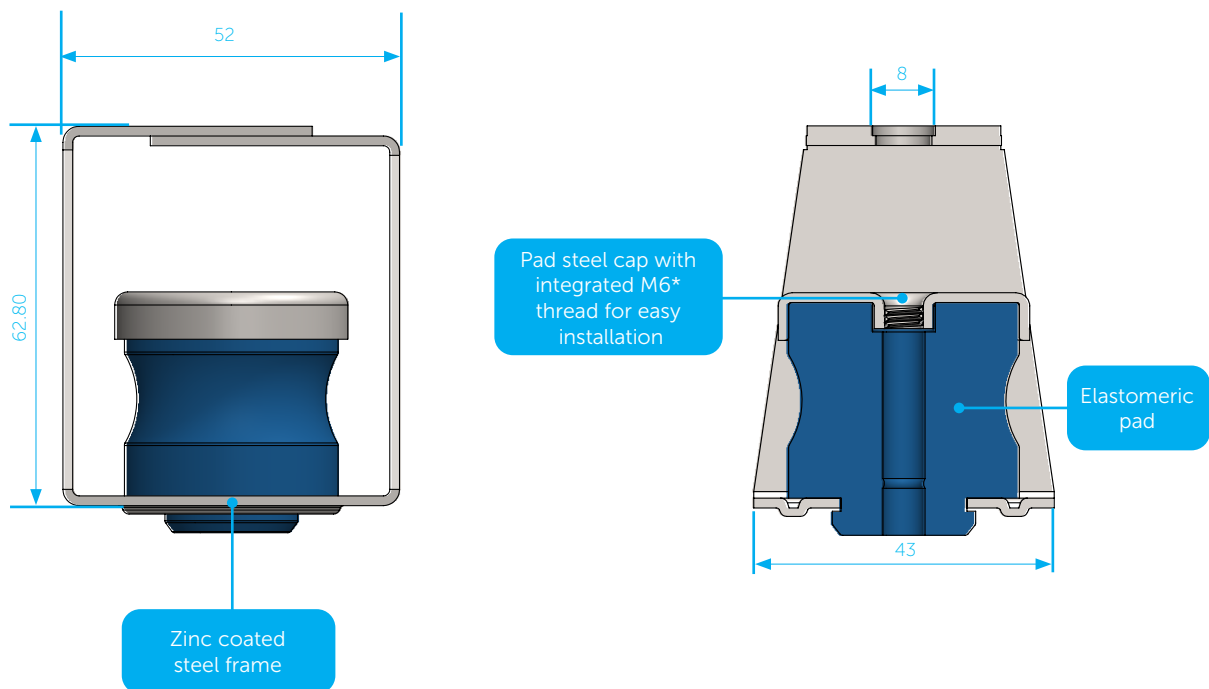


Notes:

All dimensions in millimeters (mm).


*Available in M8, upon request.



Deflection as Function of Load

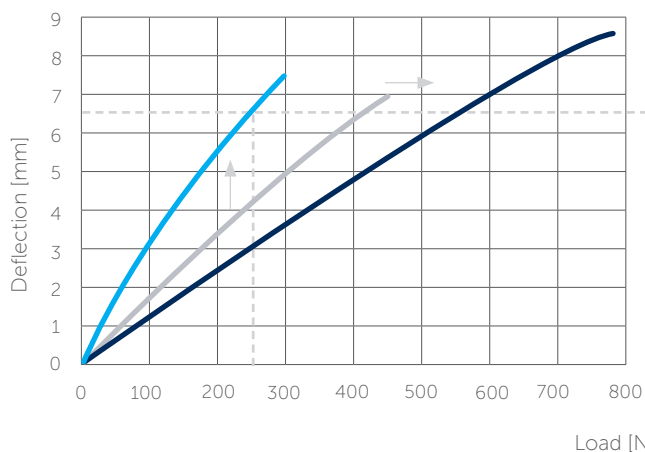

Deflection as Function of Frequency

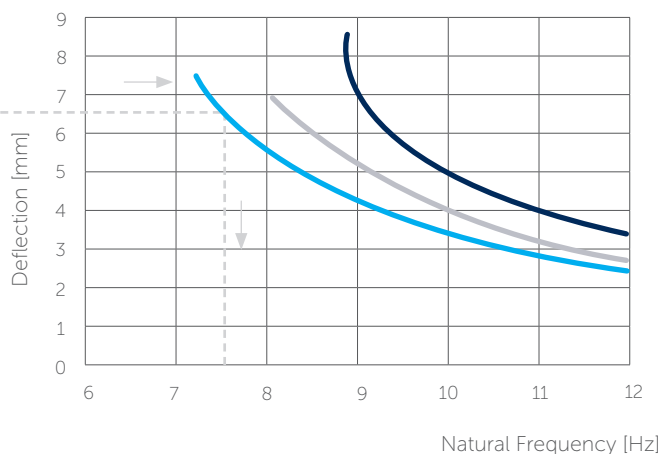

● Stravilink DCH-P240

● Stravilink DCH-P360


● Stravilink DCH-P625



The natural frequency of a Stravilink DCH-P hanger can be determined by its load. To start the calculation use the graph "Deflection as function of load" this will provide the deflection at the specified load. Then moving horizontally to the right hand side plot "Deflection as function of frequency" on which the corresponding resonance frequency can be found. As an example, the natural frequency of a Stravilink DCH-P240 loaded with 250 N is determined. The corresponding deflection is 6.5 mm. The natural frequency of the pad at 6.5 mm deflection is 7.5 Hz.




ACCESSORIES



Perimeter Strip


Self-adhesive perimeter strip 10 mm thick to isolate the ceiling from the adjacent walls.

Note: Standard widths of 50 mm, 100 mm, and 150 mm are available in 10 lm rolls.

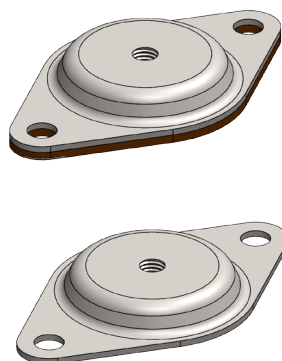

M6 anchor plate


Available with (for settlement on rough surfaces) or without rubber (2 mm)
Material: DX51D+S275
Admissible load of steel element: 3090 N

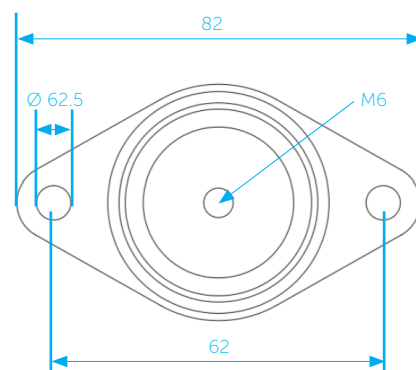

Note: All dimensions in millimeters (mm).




47/60 mm channel

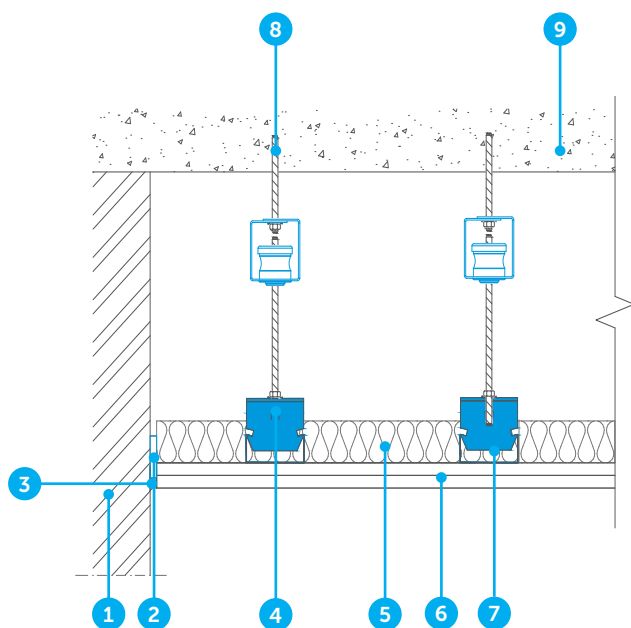

1. Wall
2. Perimeter Strip
3. Elastic caulk
4. C Clip
5. Absortion layer
6. Plasterboards, gypsum board or dry lining
7. 47/60 mm channel
8. Stravilink DCH-P
9. Concrete Slab


MF grid

Option 1

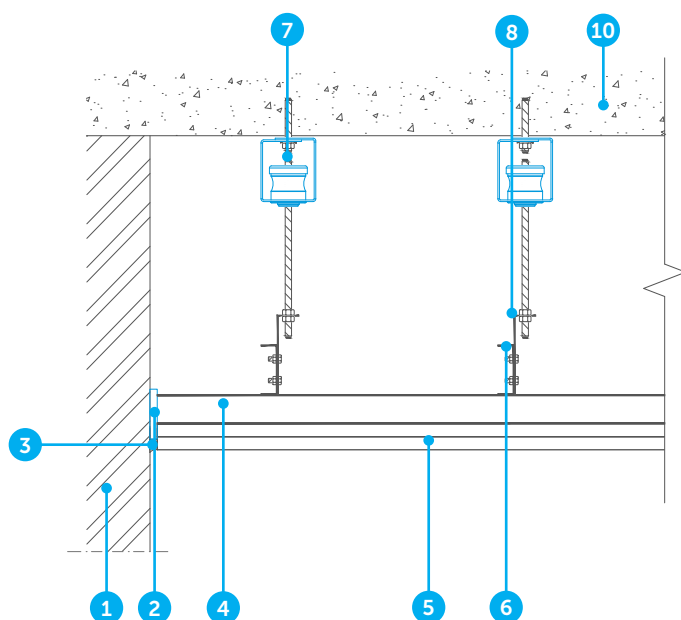

1. Wall
2. Perimeter Strip
3. Elastic caulk
4. British gypsum MF5 secondary channel
5. Plasterboards, gypsum board or dry lining

Option 2

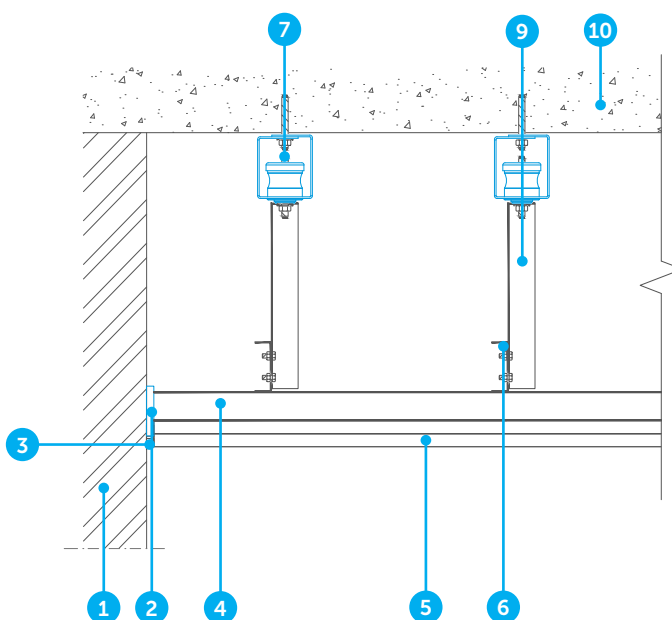

6. British gypsum MF7 primary channel
7. Stravilink DCH-P
8. Pre-formed angle bracket
9. British gypsum FEA1 angle
10. Concrete Slab



Test Setup

Assembly 1

1. 140 mm CLT 5-ply
2. Stravilink CC60-P240 clips [on grid of 600 mm x 800 mm]
3. 50 mm mineral wool
4. 2x layers 18 mm gypsum boards

Assembly 2

1. 140 mm concrete base slab
2. 100 mm void
3. Stravilink CC60-P clips [on grid of 567.5 x 1200 mm]
4. 60 mm mineral wool
5. 2x layers 12.5 mm gypsum boards

Setup

 $L_{n,w} (C_i)$ $\Delta L_w (C_i)$ $R_w (C, C_{tr})$

Assembly 1

56 (-2)

31 (-5)

67 (-2, -7)

Bare Slab 1

88 (-4)

38 (-1, -3)

Assembly 2

51 (-5)

29 (-10)

74 (-3, -8)

Bare Slab 2

83 (-10)

52 (-1, -5)

Laboratory report available upon request

Assembly 1: Test report number AC-23-084-01

Assembly 2: Test report numbers TS-25-586-08 & TS-25-586-14



The test setups above did not use the Stravilink DCH-P but were conducted with products featuring elastomeric pads with properties similar to those in the Stravilink DCH-P under identical load conditions. Therefore, the performance of this product is expected to be comparable under the same conditions.



Scan the QR code to access Stravi-dB acoustic data, including reports and editable CSV files.

<https://stravi-db.com/>



SCAN
ME

DISCLAIMER

This information is accurate to the best of our knowledge at the time of issue. Information, data and recommendations provided are based on industry accepted testing and prior product usage. It is intended as descriptive of the general capabilities and performance of our products and does not endorse applicability for any particular project. We reserve the right to change products, performance, and data without notice. This document replaces all information supplied prior to the publication hereof.