

## Stravilink Zbar Datasheet

**Stravilink Zbar** is a frameless, low-profile resilient fixation system for acoustic ceilings that isolates the primary ceiling structure (Zbar profile) from the structure.

It is a streamlined resilient fixation system designed for ceilings with void depth from 4" (100 mm). Stravilink Zbar solution is used to isolate acoustical ceilings from the structure without the need for spring hangers.



### BENEFITS

- Cost effective
- Quick and easy to install
- Void depth from 4" (100 mm)
- Main isolator completely fits within vertical leg of Zbar profile, no adhesive necessary
- Tested at accredited lab (NRC), including in combination with floor setup
- Can be used in combination with floating floors, wall isolation and isolated ceilings to create box-in-box constructions
- Complete with sleeve isolator for fixation system



## PHYSICAL & MECHANICAL PROPERTIES


Model	Design Load		Resonance Frequency at Design Load	Load Range (per Hanger)		Pad Colour
	lbs	N		Hz	lbs	
Stravilink Zbar	108	480	7	45-135	200-600	Black

### Notes:

Products are suited up to a C2 environment (atmosphere with little or no degree of pollution).

To assess which type is appropriate the following information is needed:

- 1) The weight and construction of the supported ceiling - this will determine the type of hanger;
- 2) The weights and support locations of any items hung from the ceiling.

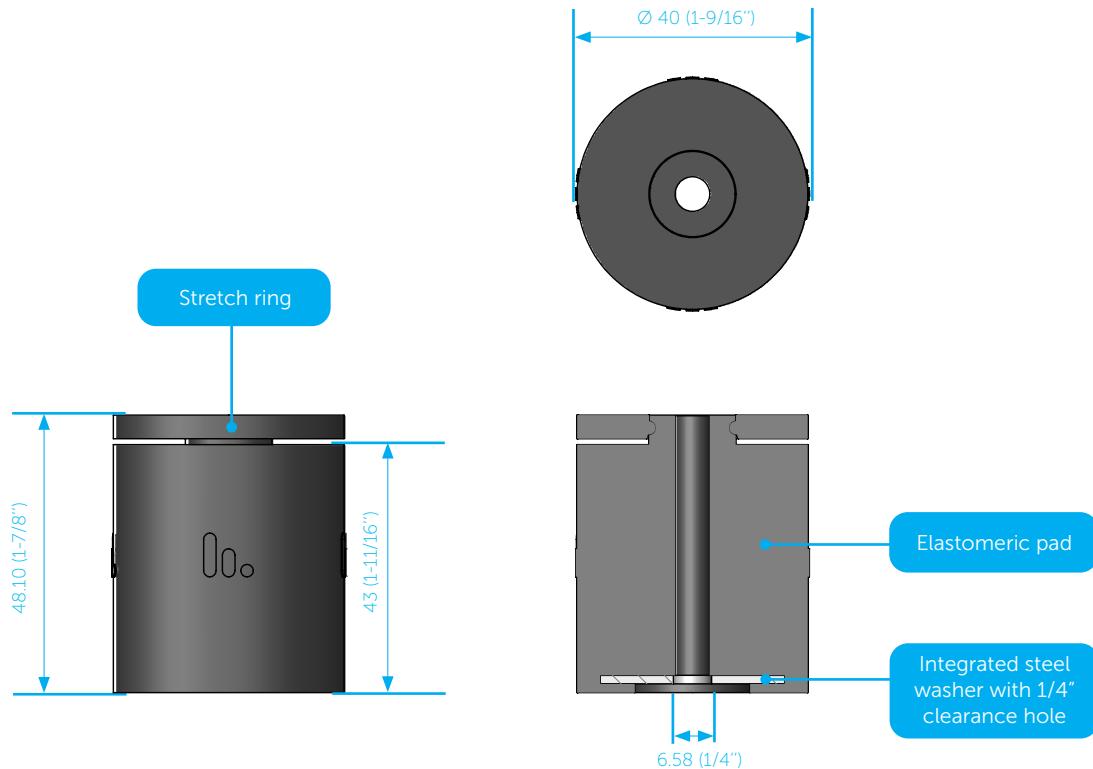


### Notes:

All dimensions in millimeters (inches).



## TYPICAL ASSEMBLIES

1. Perimeter Strip
2. Zbar profile
3. Stravilink Zbar
4. Insulation
5. Drywall

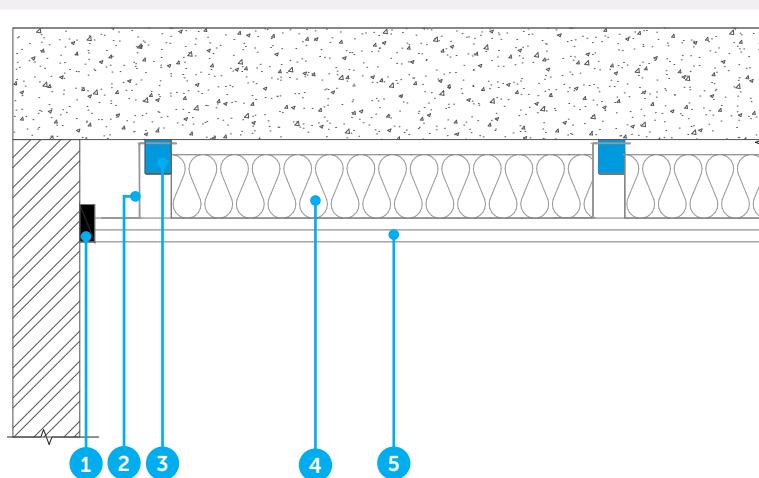



## ACOUSTICAL RESULTS

### Test Setup


1. 150 mm (6") precast concrete slab
2. Stravilink Zbar frameless ceiling isolators
3. 100 mm (4") Z-channels, spaced at 610 mm (24") on centers
4. 89 mm (3-1/2") glass fibre insulation batts in the cavity
5. 2 layers of 16 mm (5/8") Type X gypsum board

Setup      IIC      STC


Assembly	55	68
Bare Slab	29	53

Laboratory report available upon request  
NRC Test Report A1-021983.1

Frequency [Hz]	Airborne TL [dB]	
	Bare Slab	Assembly
50	39	39
63	39	42
80	41	47
100	40	50
125	39	51
160	39	51
200	37	50
250	41	56
315	45	61
400	47	67
500	50	73
630	53	72
800	55	70
1000	58	77
1250	61	80
1600	63	82
2000	66	88
2500	68	91
3150	72	93
4000	74	92
5000	78	91

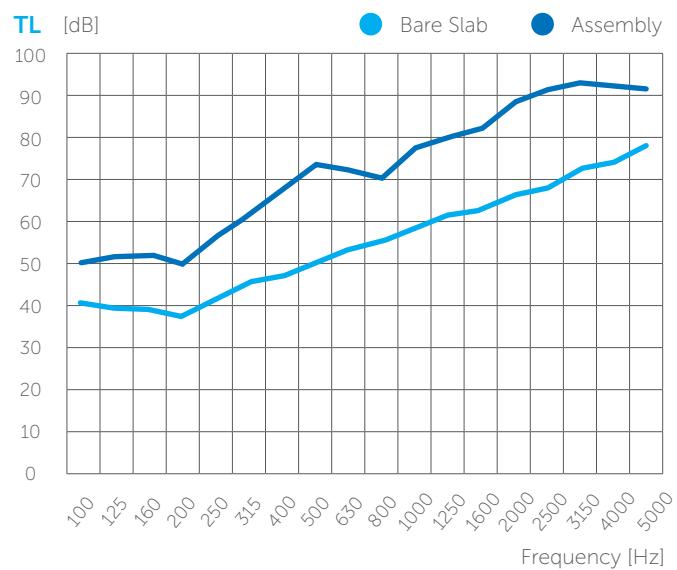

Frequency [Hz]	NISPL [dB]	
	Bare Slab	Assembly
50	55	55
63	56	54
80	59	52
100	62	54
125	67	53
160	68	54
200	71	56
250	72	53
315	71	53
400	73	50
500	73	49
630	73	54
800	73	57
1000	74	53
1250	74	52
1600	74	51
2000	74	49
2500	73	47
3150	71	42
4000	69	37
5000	65	32

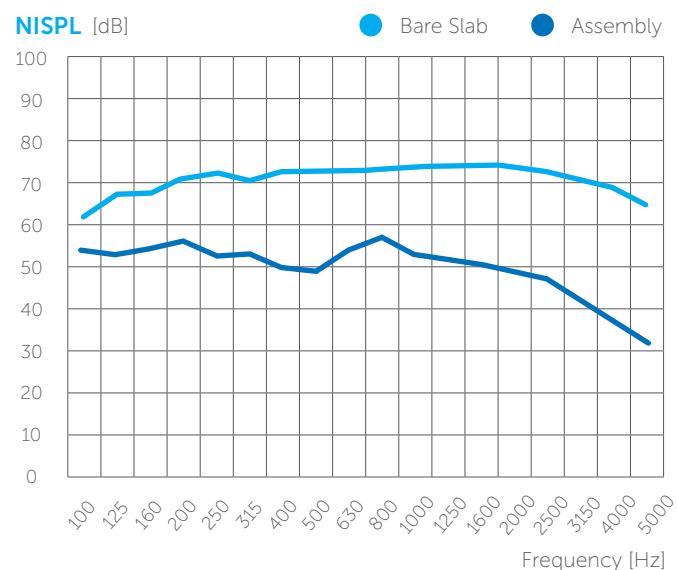

## Test Setup

1. 16 mm (5/8") engineered hardwood
2. 4.5 mm (3/16") Stravifloor Mat-F4.5<sub>e</sub> underlayment
3. 150 mm (6") precast concrete slab
4. Stravilink Zbar frameless ceiling isolators
5. 100 mm (4") Z-channels, spaced at 610 mm (24") on centers
6. 89 mm (3-1/2") glass fibre insulation batts in the cavity
7. 2 layers of 16 mm (5/8") Type X gypsum board


Setup      IIC      STC

Assembly      66      67


Bare Slab      29      53

Laboratory report available upon request  
NRC Test Report A1-021983.2

Frequency [Hz]	Airborne TL [dB]	
	Bare Slab	Assembly
50	39	39
63	39	43
80	41	46
100	40	48
125	39	49
160	39	50
200	37	50
250	41	54
315	45	56
400	47	61
500	50	69
630	53	73
800	55	72
1000	58	81
1250	61	83
1600	63	86
2000	66	91
2500	68	92
3150	72	93
4000	74	91
5000	78	90

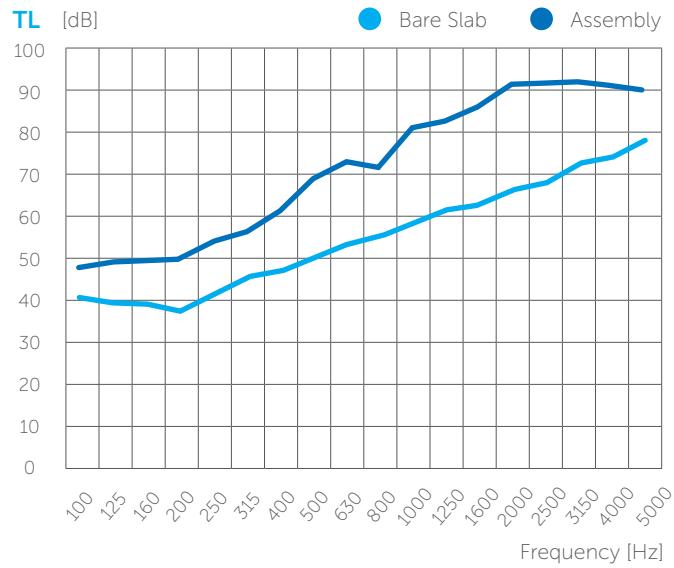

Frequency [Hz]	NISPL [dB]	
	Bare Slab	Assembly
50	55	55
63	56	51
80	59	53
100	62	51
125	67	52
160	68	52
200	71	52
250	72	50
315	71	50
400	73	46
500	73	42
630	73	39
800	73	40
1000	74	28
1250	74	19
1600	74	14
2000	74	12
2500	73	10
3150	71	10
4000	69	11
5000	65	13

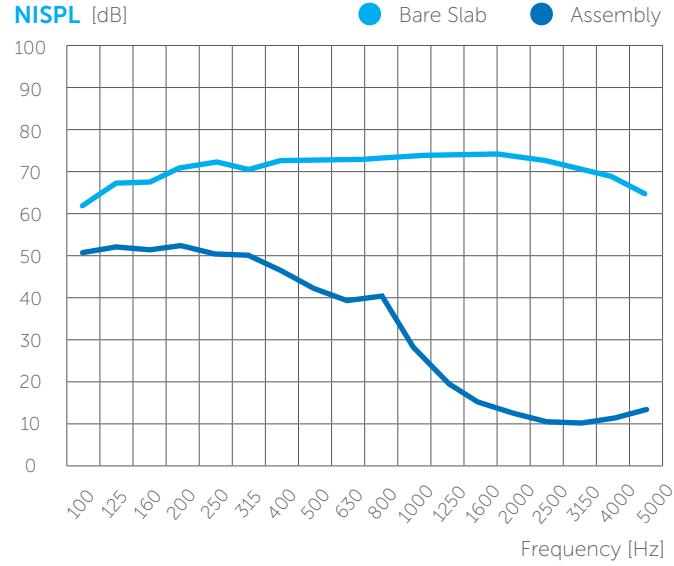

## DISCLAIMER

The documentation prepared by CDM Stravitec (including but not limited to installation guidelines) contain generally accepted procedures for a successful installation of Stravilink Zbar for acoustically isolated ceiling hanger. Any part of the suggestions presented herein, or other documentation, may be followed, modified, or rejected by the owner, engineer, contractor, and/or their representative(s) since they, and not CDM Stravitec, are responsible for planning and execution procedures appropriate to a specific application. CDM Stravitec reserves the right to alter in part or in whole the documentation prepared as well any recommendations included. It is the responsibility of the Client (direct or indirect) to ensure they have always the latest documentation and to that effect CDM Stravitec encourage contact with its local representatives to review any project specific modifications to the suggested guidelines prior to the start of the installation on site.

This documentation prepared by CDM Stravitec contains loading information for the Stravilink Zbar for acoustically isolated ceiling hangers. It should be noted that any loading information contained herein represent the loading information for the Stravilink Zbar only as supplied to the Client. This information does not in any way represent an indication and/or validation of the load capacity of any other elements not supplied by CDM Stravitec - including but not limited to anchors, hanging wires, threaded rods and framing elements for the acoustical ceiling and/or supported elements.

This information is accurate to the best of our knowledge at the time of issue. Information, data and recommendations provided are based on industry accepted testing and prior product usage. It is intended as descriptive of the general capabilities and performance of our products and does not endorse applicability for any particular project. We reserve the right to change products, performance, and data without notice. This document replaces all information supplied prior to the publication hereof.