


# Stravilink QRC<sup>\*</sup>

## Datasheet

Stravilink QRC "Quiet Resilient Clip" is an **isolated wall and ceiling clip** designed to isolate a standard wall and ceiling channel therefore optimising sound insulation between horizontally and vertically arranged rooms.

### FEATURES

- Suitable to fix to any substrate, stud or fixing type
- Ceiling hanger: supporting loads up to 24 kg (53 lbs) with natural frequency of 10 Hz at design load
- Wall tie: assigned wall weight up to 27 kg (60 lbs) per item
- Low build up height of 35 mm (1-3/8")
- Quick installation thanks to flexible concept
- Accommodates furring channel widths from 60-70 mm (2-3/8" - 2-3/4")
- Error free installation thanks to safety for over compression

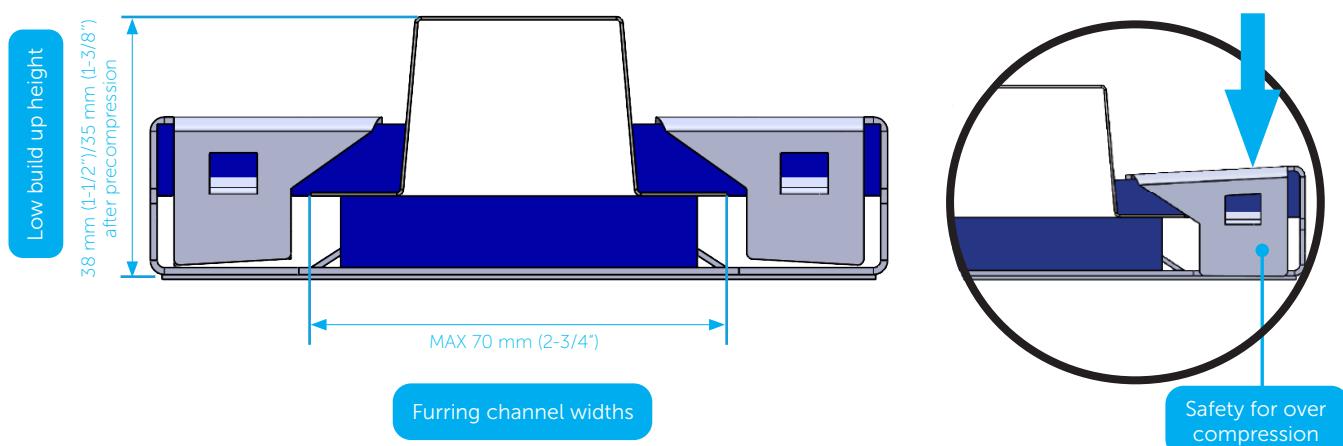

### PACKAGING

Model	Reference	Quantity per Box	Weight per Box [kg (lbs)]	Dimension of Box [cm (inch)]
Stravilink QRC	000528	120	12.5 (27.6)	35 x 23 x 18 (13-3/4" x 9-1/16" x 7-1/16")

\* This solution now replaces the previous Stravilink QRW.




## PHYSICAL & MECHANICAL PROPERTIES

Ceiling Hanger Properties					Wall Tie Properties					Elastomer Colour	
Design Load		Natural Frequency at Design Load	Load Range		Max. Assigned Weight		Max. Rated Axial Load		Max. Deflection of Wall Support		Elastomer Colour
lbs	N	Hz	lbs	N	lbs	kg	lbs	N	inch	mm	
45	200	10	16-53	70-240	Supported wall: 59.5 Unsupported wall: 48.5	Supported wall: 27 Unsupported wall: 22	60.7	270	0.26	6.7	Blue

### Notes:

- Products are suited up to a C2 environment (atmosphere with little or no degree of pollution).
- The temperature range of use is between -30°C (-22°F) and 70°C (158°F)
- Maximum assigned weight = The maximum weight of the wall that is assigned to 1 wall tie, which will cause a dynamic axial load on the wall tie. See "Natural Frequency vs Assigned Weight" - graph for corresponding frequencies.
- Maximum rated axial load = (Temporary) Static axial load on the wall tie, e.g. windloads and impact loads. See "Axial Displacement vs Rated axial load" - graph for corresponding deflections.
- Resistance to vertical motion = Maximum allowed vertical displacement. The deflection of the wall support should not exceed the maximum allowed vertical displacement of the wall tie.

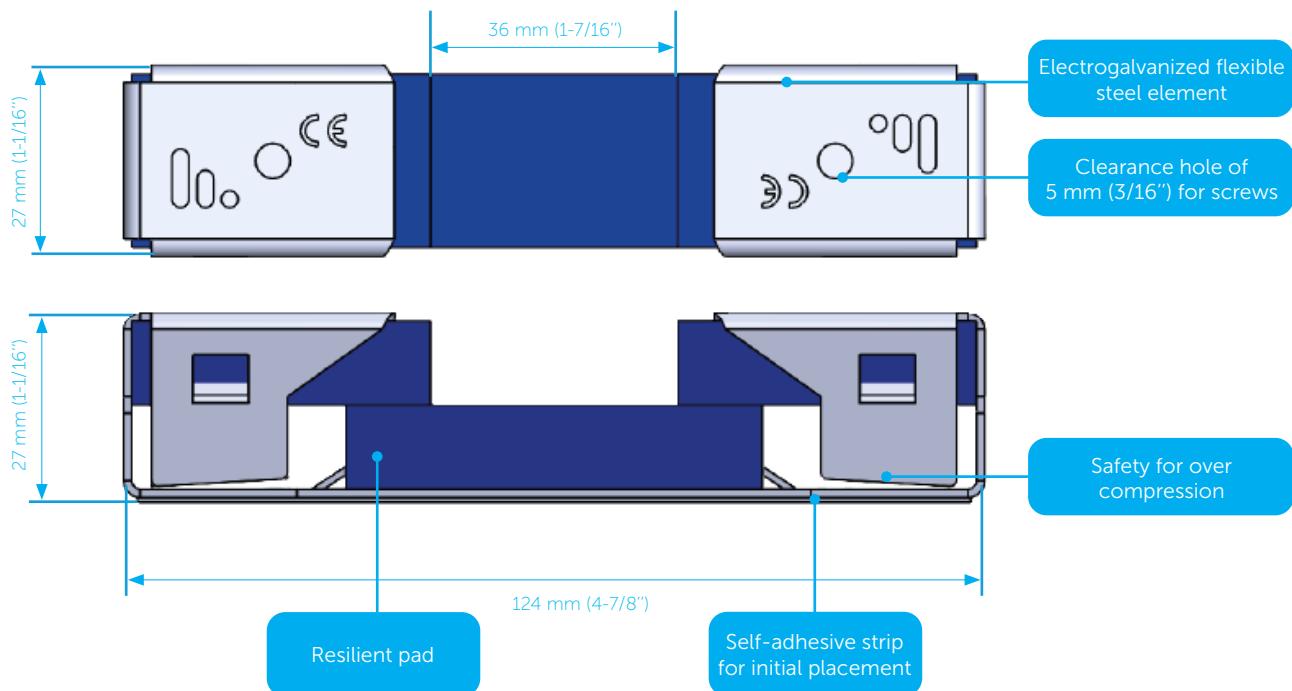

To assess what centering, fixing or load capacity related options Stravilink QRC has, the following information is needed:


- The weight and construction of the supported wall or ceiling - this will determine the type of the base isolation strip required
- The weights and support locations of any items supported off the wall or ceiling (such as televisions, etc.)




## PERFORMANCE GRAPHS

### As Ceiling Hanger

Deflection as Function of Load

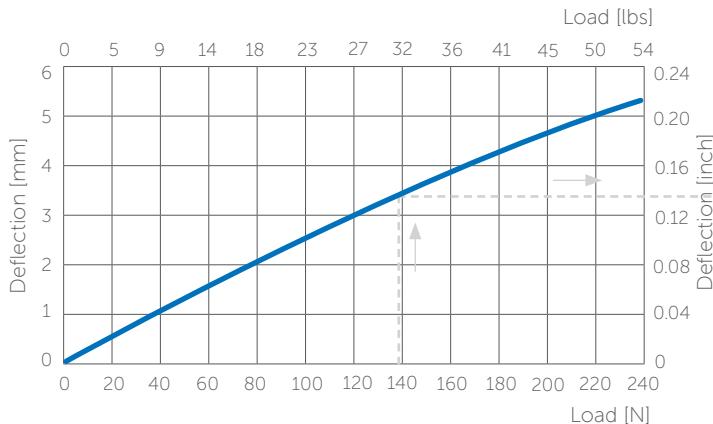


Relationship between Deflection and Natural Frequency

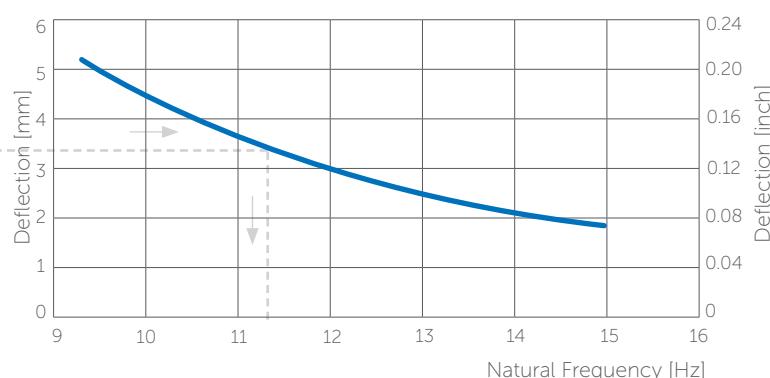


The natural frequency of a Stravilink QRC can be determined by its load. To start the calculation use the graph "deflection as function of load" this will provide the deflection at the specified load. Then moving horizontally to the right hand side plot "deflection as function of frequency" on which the corresponding natural frequency can be found. As an example, the natural frequency of the QRC loaded with 140 N (32 lbs) is determined. The corresponding deflection is 3.4 mm (1/8"). The natural frequency of the QRC at 3.4 mm (1/8") deflection is 11.5 Hz.

### As Wall Ties

Natural Frequency under assigned Wall Weight

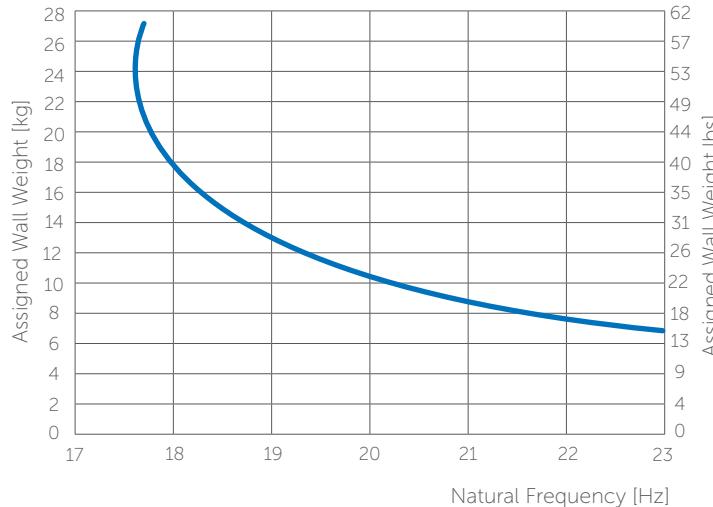

Rated Axial Load and Deflection

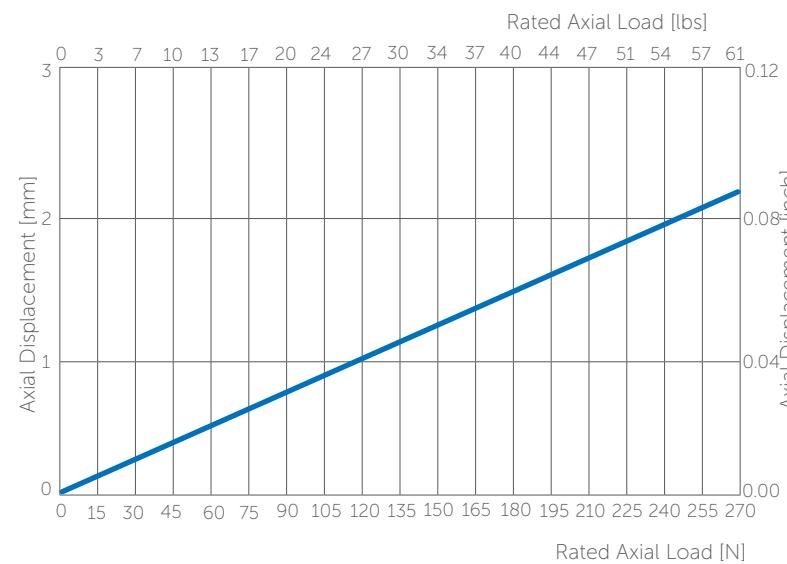



## EXTRAS



### Perimeter Strip


1. Self-adhesive perimeter strip 10 mm (3/8") thick to isolate the ceiling from the adjacent walls.

Note: Standard widths of 50 mm (2"), 100 mm (4"), and 150 mm (6") are available in 10 m (32' 9-11/16") rolls.




## TYPICAL ASSEMBLIES

Typical wall elevation with Stravilink QRC and furring channel:

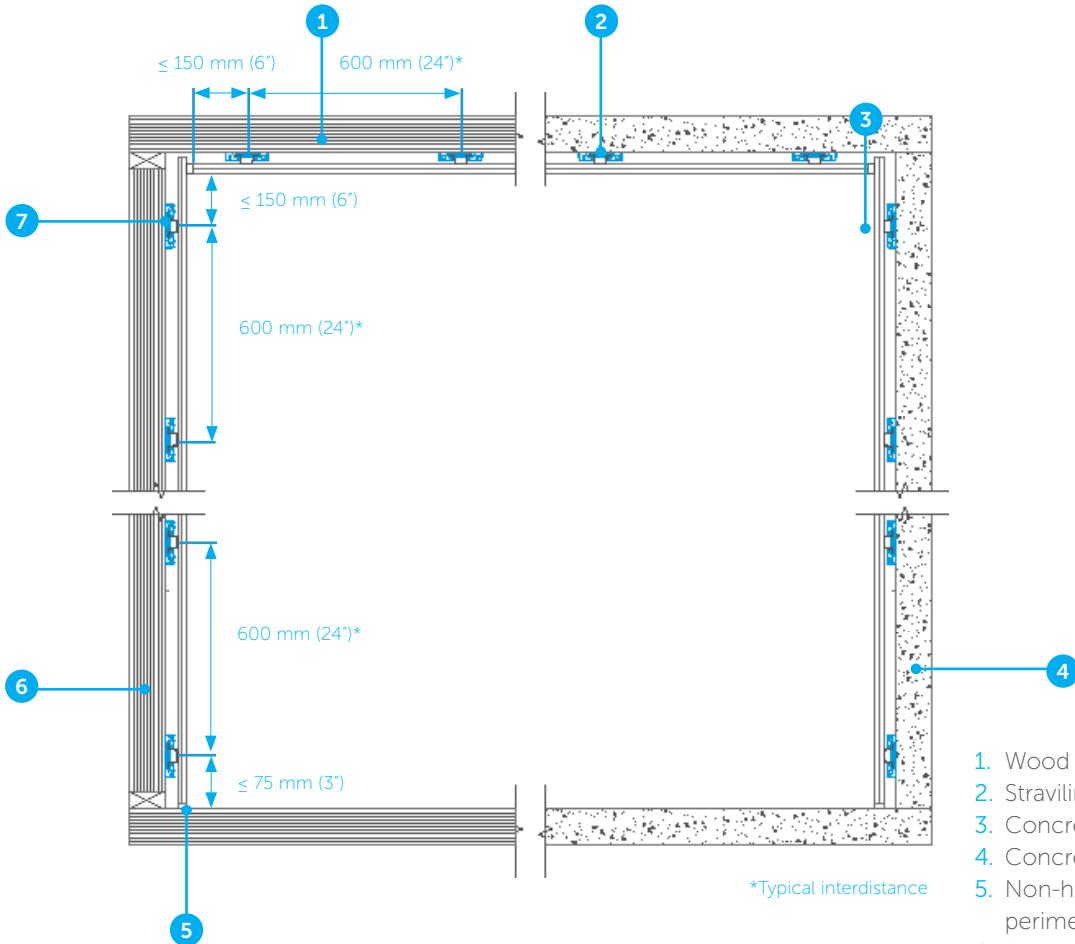


1. Wood ceiling
2. Stravilink QRC (ceiling configuration)
3. Concrete ceiling
4. Concrete wall
5. Non-hardening acoustical sealant or perimeter strip
6. Stud wall
7. Stravilink QRC (wall configuration)

Typical wall elevation with Stravilink QRC and furring channel:

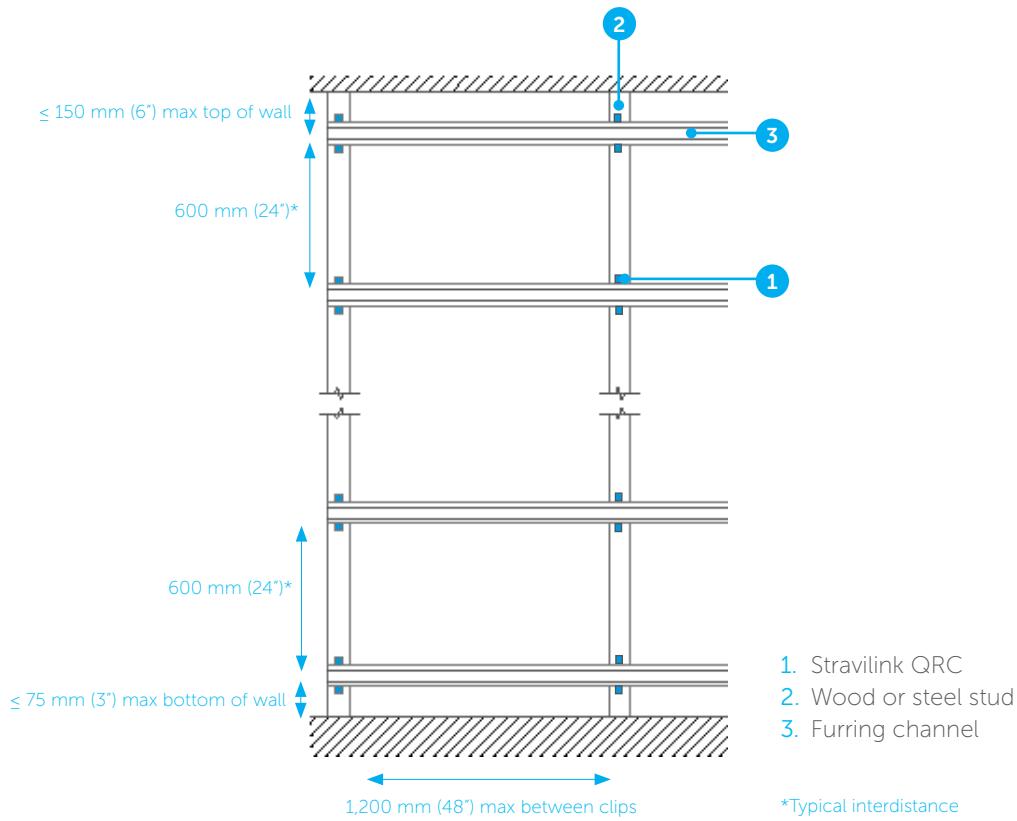


Typical ceiling layout with Stravilink QRC and furring channel:

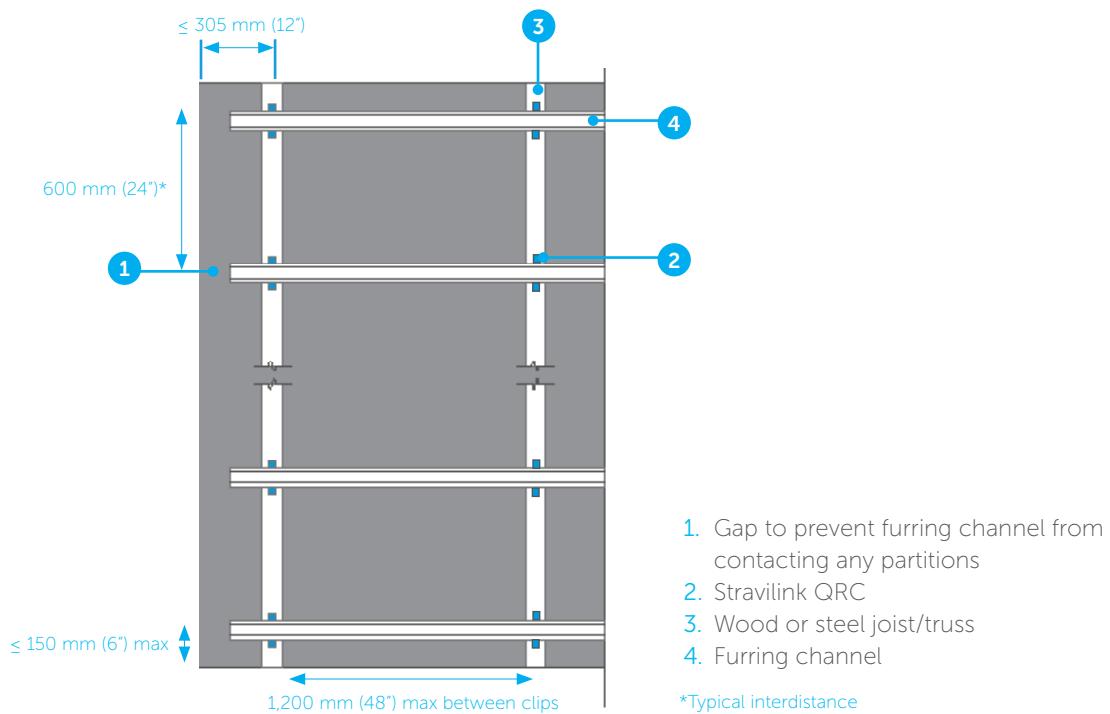



## ACOUSTIC RESULTS

### Stravilink QRC on Ceiling Setup

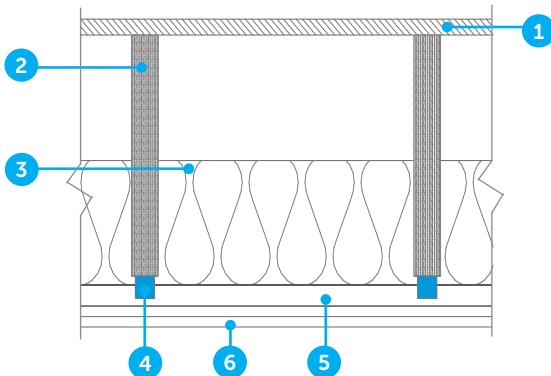

#### Test Setup

1. 19 mm (3/4") plywood
2. 38 mm (1-1/2") x 240 mm (9-7/16") wood joists, spaced 406 mm (16") on centers
3. 150 mm (5-7/8") fiberglass batt insulation
4. Stravilink QRC
5. 22 mm (7/8") metal furring channel
6. 2 layers 16 mm (5/8") plasterboard

IIC


STC

52


59

Laboratory report available upon request  
Test Report A1-021983-9

Frequency [Hz]	Airbone TL [dB]
50	21
63	26
80	28
100	30
125	37
160	39
200	42
250	46
315	52
400	58
500	61
630	60
800	60
1000	62
1250	63
1600	66
2000	63
2500	67
3150	73
4000	77
5000	82

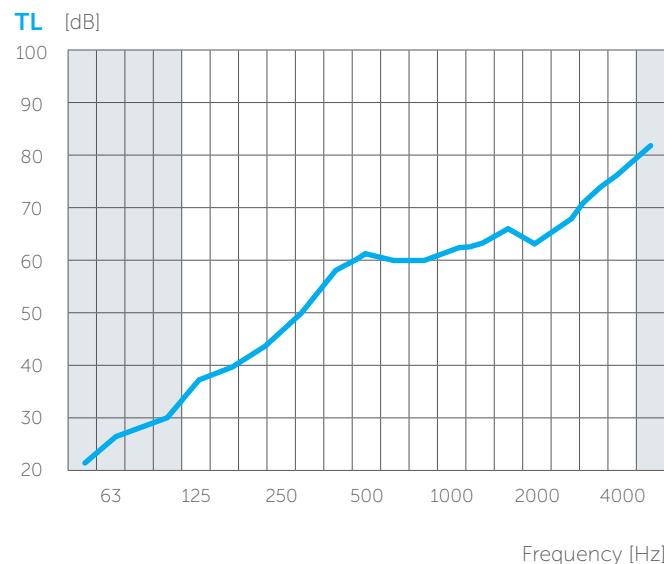


Frequency [Hz]	NISPL [dB]
50	75
63	70
80	67
100	66
125	64
160	65
200	66
250	64
315	61
400	58
500	57
630	57
800	58
1000	62
1250	53
1600	47
2000	47
2500	41
3150	32
4000	25
5000	18

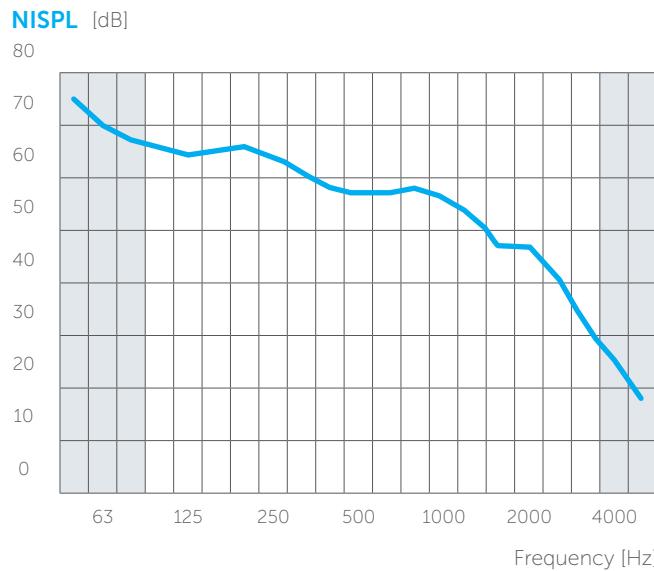

STC single figure rating determined in accordance with ASTM E413-22 based on ASTM E90-09 measurements.  
IIC single figure rating determined in accordance with ASTM E989-21 based on ASTM E492-22 measurements.

## Stravilink QRC on Wall Setup



### Test Setup


1. 2 x 15 mm (9/16") plasterboard
2. 30 mm (1-3/16") furring channel
3. Stravilink QRC
4. Metal stud wall of 90 mm (3-9/16") with 50 mm (2") insulation
5. Flexible sealant joint
6. Perimeter Strip

STC

66

Laboratory report available upon request  
Test Report AC5576

Frequency [Hz]	Airbone TL (dB)
50	23
63	26
80	33
100	44
125	46
160	49
200	54
250	56
315	59
400	61
500	65
630	68
800	71
1000	71
1250	72
1600	70
2000	63
2500	67
3150	72
4000	71
5000	69

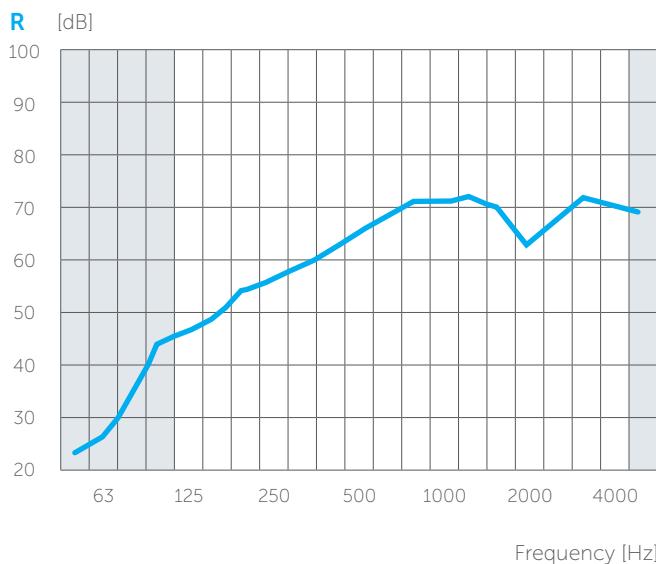

STC single figure rating determined in accordance with ASTM E4713-22 based on ISO 10140-2 measurements.

### DISCLAIMER

The documentation prepared by CDM Stravitec (including but not limited to installation guidelines) contain generally accepted procedures for a successful installation of Stravilink QRC for acoustically isolated ceiling hanger. Any part of the suggestions presented herein, or other documentation, may be followed, modified, or rejected by the owner, engineer, contractor, and/or their representative(s) since they, and not CDM Stravitec, are responsible for planning and execution procedures appropriate to a specific application. CDM Stravitec reserves the right to alter in part or in whole the documentation prepared as well any recommendations included. It is the responsibility of the Client (direct or indirect) to ensure they have always the latest documentation and to that effect CDM Stravitec encourage contact with its local representatives to review any project specific modifications to the suggested guidelines prior to the start of the installation on site.

This documentation prepared by CDM Stravitec contains loading information for the Stravilink QRC for acoustically isolated ceiling hangers. It should be noted that any loading information contained herein represent the loading information for the Stravilink QRC only as supplied to the Client. This information does not in any way represent an indication and/or validation of the load capacity of any other elements not supplied by CDM Stravitec - including but not limited to anchors, hanging wires, threaded rods and framing elements for the acoustical ceiling and/or supported elements.

This information is accurate to the best of our knowledge at the time of issue. Information, data and recommendations provided are based on industry accepted testing and prior product usage. It is intended as descriptive of the general capabilities and performance of our products and does not endorse applicability for any particular project. We reserve the right to change products, performance, and data without notice. This document replaces all information supplied prior to the publication hereof.

