

Stravilink Zbar*

Datasheet

Stravilink Zbar is a frameless low profile resilient fixation system for acoustic ceilings isolating the primary ceiling structure (Zbar profile) and the concrete structure.



BENEFITS



- Cost effective
- Quick and easy to install
- Void depth from 4" (100 mm)
- Main isolator completely fits within vertical leg of Zbar profile, no adhesive necessary
- Tested at accredited lab (NRC), including in combination with floor setup
- Can be used in combination with floating floors, wall isolation and isolated ceilings to create box-in-box constructions
- Complete with sleeve isolator for fixation system

*Available in Canada only.



TYPICAL ASSEMBLIES

1. Perimeter Strip
2. Zbar profile
3. Stravilink Zbar
4. Insulation
5. Drywall

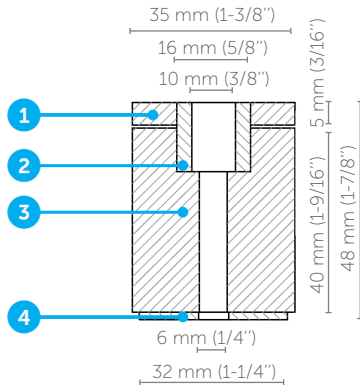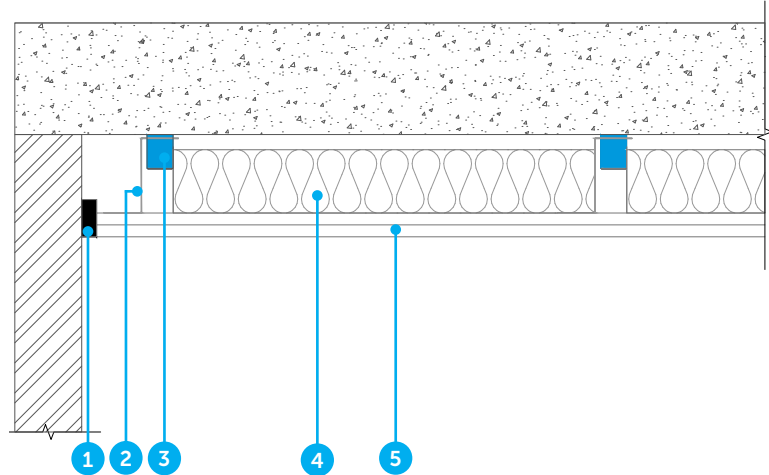

1. Stravilink Zbar stabilizer
[35 x 35 x 5 mm (1-3/8" x 1-3/8" x 3/16")]
2. Acoustic Sleeve
3. Stravilink Zbar isolator
[35 x 35 x 40 mm (1-3/8" x 1-3/8" x 1-9/16")]
4. Steel washer

Custom pad for Stravilink Zbar Performance Data⁽¹⁾

Range ⁽²⁾	Load range [N]	Load per hanger [kg (Lbs)]	Estimated deflection [mm (inches)]	Estimated resonance frequency [Hz]
min.	205	20.9 (46.0)	4 (0.15)	9
max.	600	61.2 (134.8)	10 (0.39)	7

⁽¹⁾ These performances and load ratings values are given as standard value. CDM Stravitec may change these ratings at any time without previous notice. All specific ratings need to be confirmed based on the project requirements and specific in situ conditions. Ratings are based on the load being fully supported by the natural rubber pads type M [35 x 35 x 5 mm (1-3/8" x 1-3/8" x 1-9/16")].

⁽²⁾ Values noted under minimum and maximum columns are correspondent to the minimum and maximum conditions for load, for the standard pads supplied with the fixation system.



Test Setup

1. 150 mm (6") precast concrete slab
2. Stravilink Zbar framelless ceiling isolators
3. 100 mm (4") Z-channels, spaced at 610 mm (24") on centers
4. 89 mm (3-1/2") glass fibre insulation batts in the cavity
5. 2 layers of 16 mm (5/8") Type X gypsum board

Setup

IIC

STC

Assembly

55

68


Bare Slab

29


53

Laboratory report available upon request
NRC Test Report A1-021983.1

Frequency [Hz]	Airborne TL [dB]	
	Bare Slab	Assembly
50	39	39
63	39	42
80	41	47
100	40	50
125	39	51
160	39	51
200	37	50
250	41	56
315	45	61
400	47	67
500	50	73
630	53	72
800	55	70
1000	58	77
1250	61	80
1600	63	82
2000	66	88
2500	68	91
3150	72	93
4000	74	92
5000	78	91

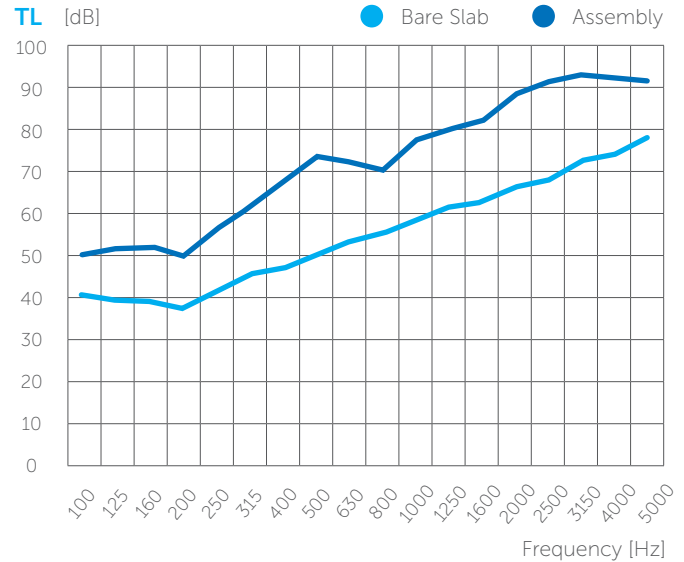

Frequency [Hz]	NISPL [dB]	
	Bare Slab	Assembly
50	55	55
63	56	54
80	59	52
100	62	54
125	67	53
160	68	54
200	71	56
250	72	53
315	71	53
400	73	50
500	73	49
630	73	54
800	73	57
1000	74	53
1250	74	52
1600	74	51
2000	74	49
2500	73	47
3150	71	42
4000	69	37
5000	65	32

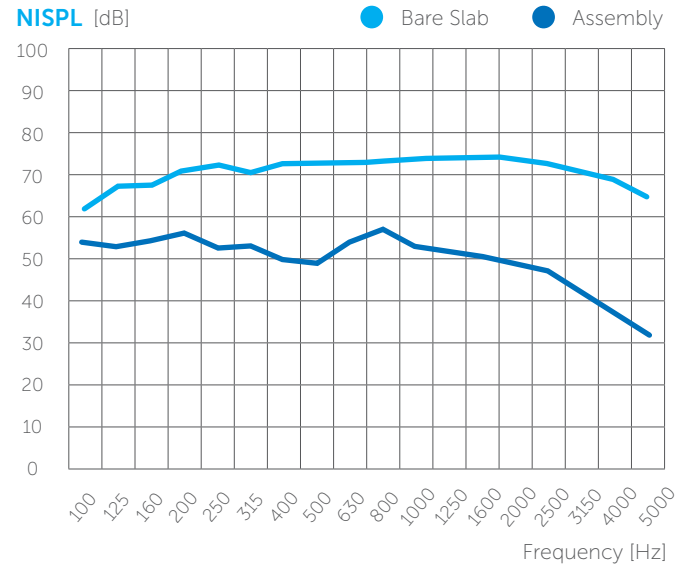


Test Setup

- 1. 16 mm (5/8") engineered hardwood
- 2. 4.5 mm (3/16") Stravifloor Mat-F4.5_e underlayment
- 3. 150 mm (6") precast concrete slab
- 4. Stravilink Zbar framelless ceiling isolators
- 5. 100 mm (4") Z-channels, spaced at 610 mm (24") on centers
- 6. 89 mm (3-1/2") glass fibre insulation batts in the cavity
- 7. 2 layers of 16 mm (5/8") Type X gypsum board


Setup	IIC	STC
Assembly	66	67
Bare Slab	29	53

Laboratory report available upon request
NRC Test Report A1-021983.2

Frequency [Hz]	Airborne TL [dB]	
	Bare Slab	Assembly
50	39	39
63	39	43
80	41	46
100	40	48
125	39	49
160	39	50
200	37	50
250	41	54
315	45	56
400	47	61
500	50	69
630	53	73
800	55	72
1000	58	81
1250	61	83
1600	63	86
2000	66	91
2500	68	92
3150	72	93
4000	74	91
5000	78	90

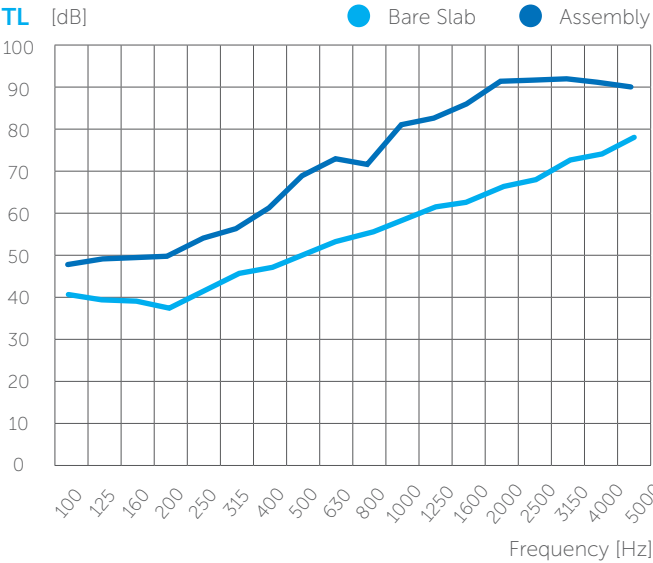

Frequency [Hz]	NISPL [dB]	
	Bare Slab	Assembly
50	55	55
63	56	51
80	59	53
100	62	51
125	67	52
160	68	52
200	71	52
250	72	50
315	71	50
400	73	46
500	73	42
630	73	39
800	73	40
1000	74	28
1250	74	19
1600	74	14
2000	74	12
2500	73	10
3150	71	10
4000	69	11
5000	65	13

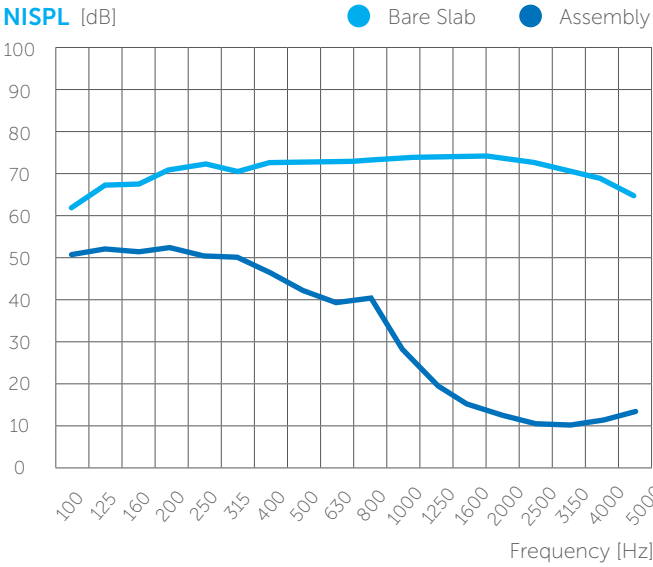

DISCLAIMER

The documentation prepared by CDM Stravitec (including but not limited to installation guidelines) contain generally accepted procedures for a successful installation of Stravilink Zbar for acoustically isolated ceiling hanger. Any part of the suggestions presented herein, or other documentation, may be followed, modified, or rejected by the owner, engineer, contractor, and/or their representative(s) since they, and not CDM Stravitec, are responsible for planning and execution procedures appropriate to a specific application. CDM Stravitec reserves the right to alter in part or in whole the documentation prepared as well any recommendations included. It is the responsibility of the Client (direct or indirect) to ensure they have always the latest documentation and to that effect CDM Stravitec encourage contact with its local representatives to review any project specific modifications to the suggested guidelines prior to the start of the installation on site.

This documentation prepared by CDM Stravitec contains loading information for the Stravilink Zbar for acoustically isolated ceiling hangers. It should be noted that any loading information contained herein represent the loading information for the Stravilink Zbar only as supplied to the Client. This information does not in any way represent an indication and/or validation of the load capacity of any other elements not supplied by CDM Stravitec - including but not limited to anchors, hanging wires, threaded rods and framing elements for the acoustical ceiling and/or supported elements.

This information is accurate to the best of our knowledge at the time of issue. Information, data and recommendations provided are based on industry accepted testing and prior product usage. It is intended as descriptive of the general capabilities and performance of our products and does not endorse applicability for any particular project. We reserve the right to change products, performance, and data without notice. This document replaces all information supplied prior to the publication hereof.