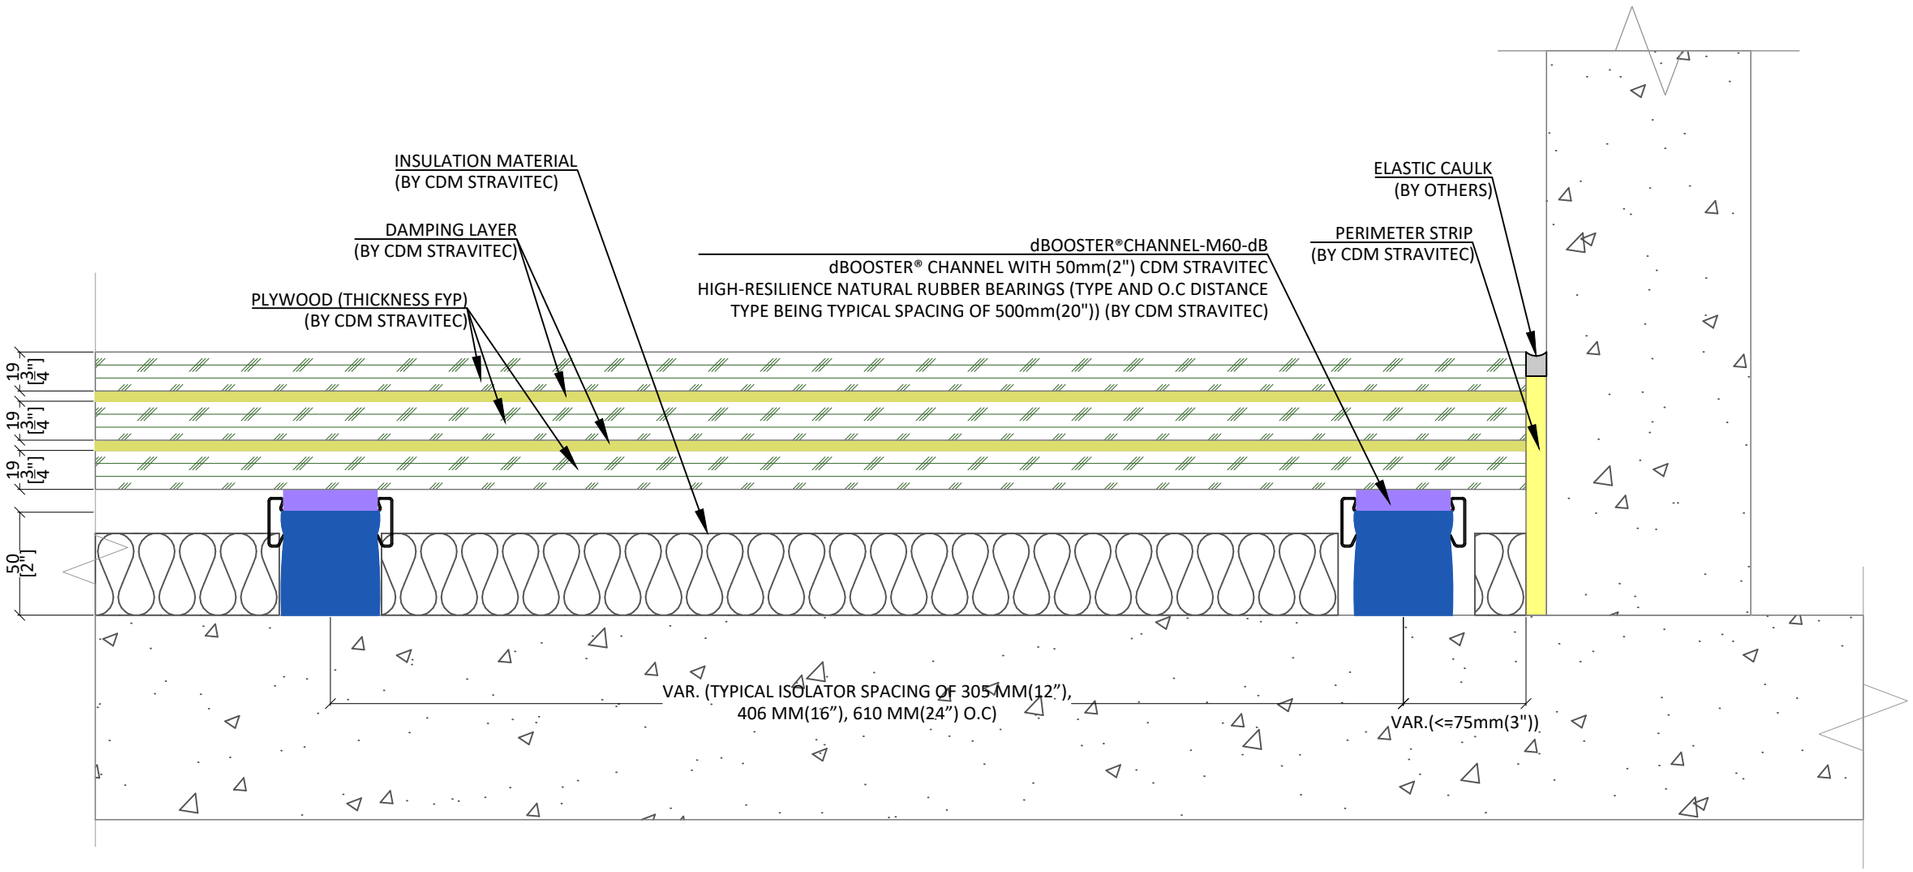


Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 126mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM XP W/ dBOOSTER®

Typical sections_Stravigym XP (US-CA)-01


Drawn:
VPR 2026/08/21

Design:

Check:
GGU

Scale:
1 : 3

Format:
A3

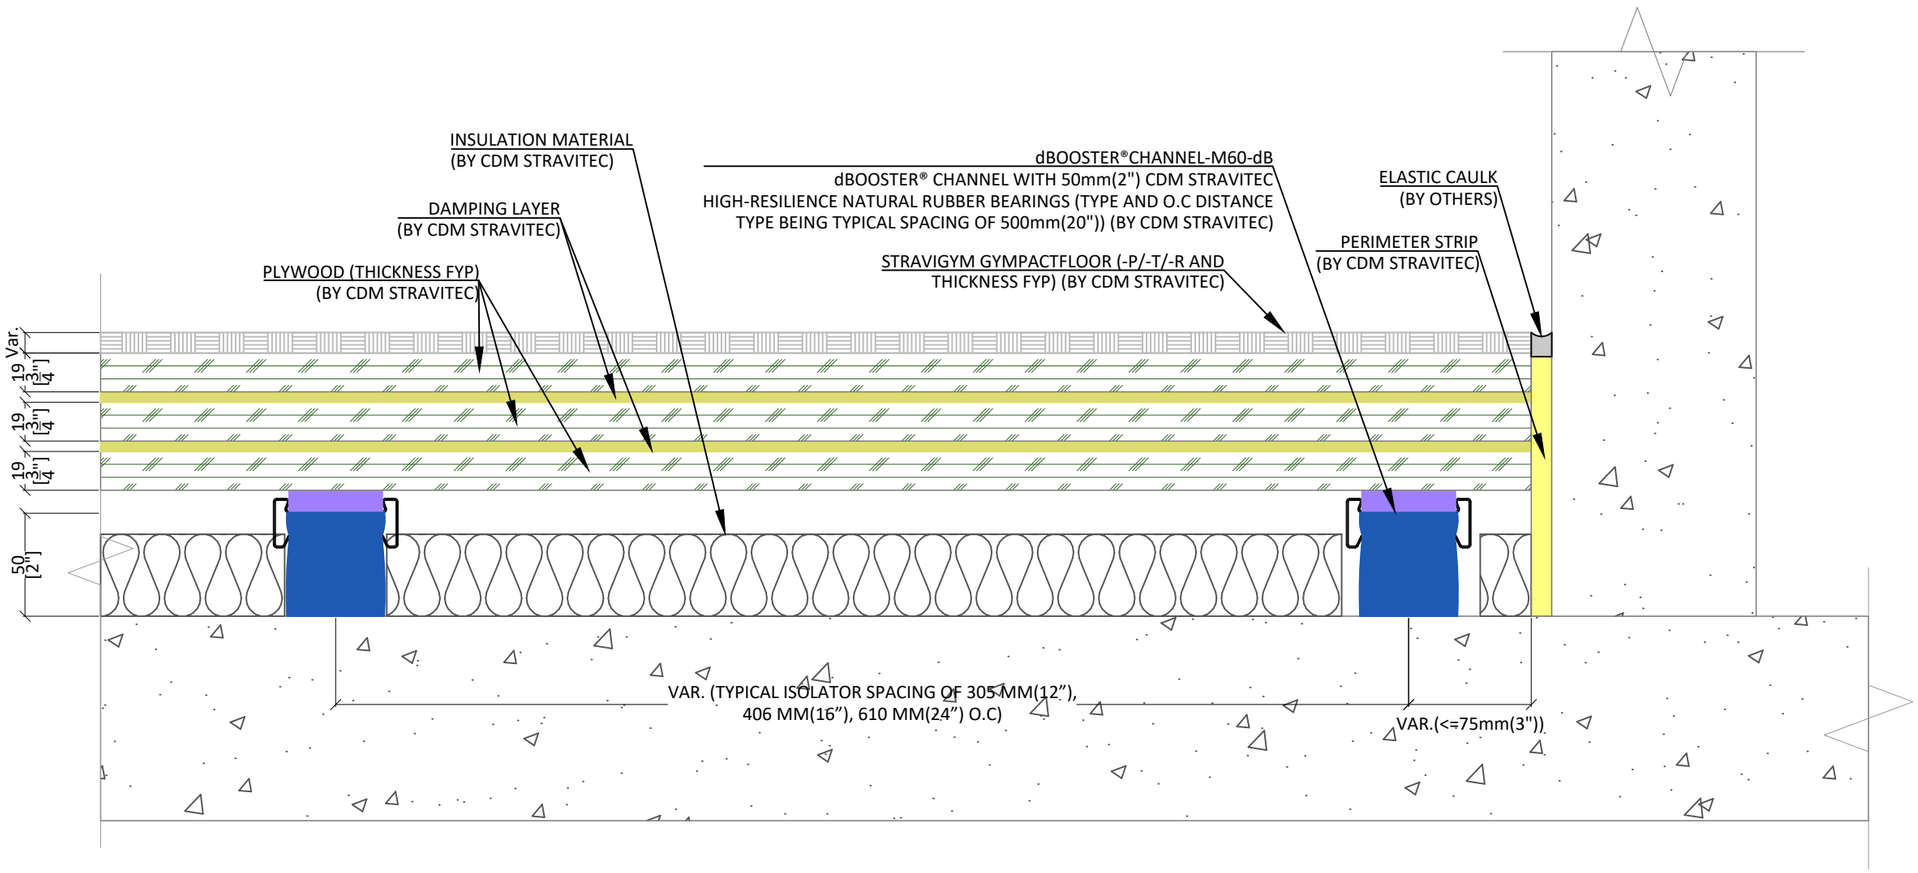

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 136mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM XP W/ dBOOSTER® & GYMPACTFLOOR

Typical sections_Stravigym XP (US-CA)-02


Drawn: VPR 2026/08/21

Design: ----

Check: GGU

Scale: 1 : 3

Format: A3

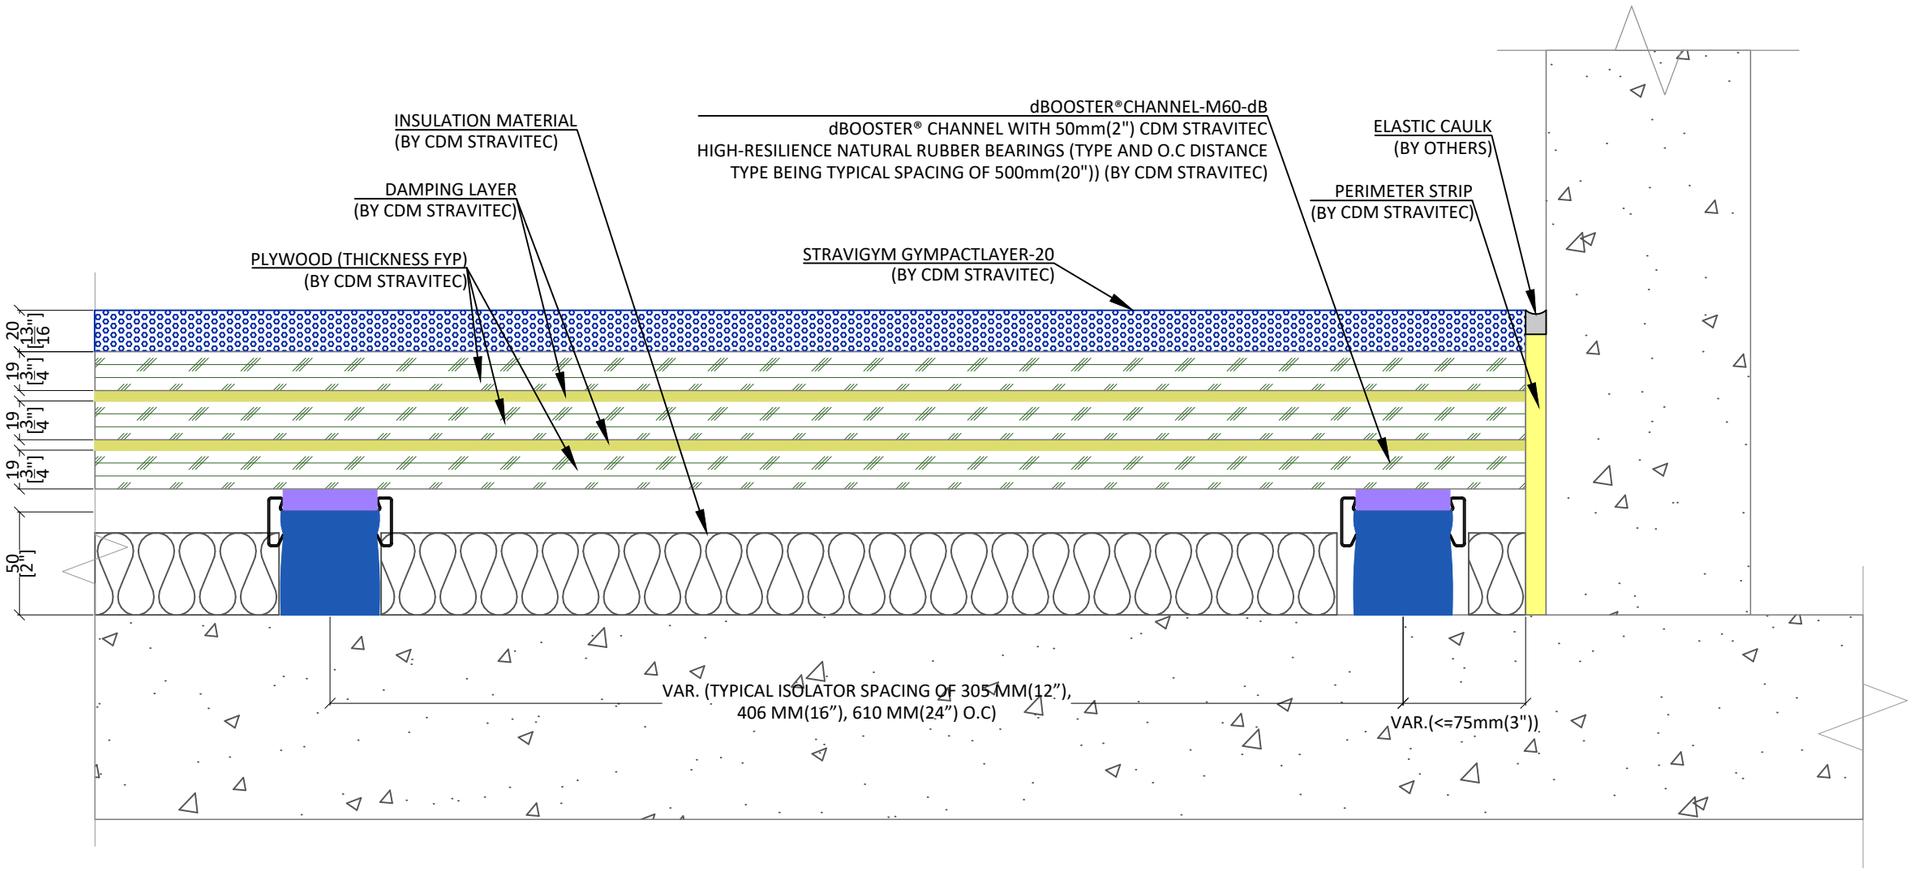

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 146mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM XP W/ dBOOSTER® W/ GYMAPCTLAYER-20

Typical sections_Stravigym XP (US-CA)-03


Drawn: VPR 2026/08/21

Design: ----

Check: GGU

Scale: 1 : 3

Format: A3

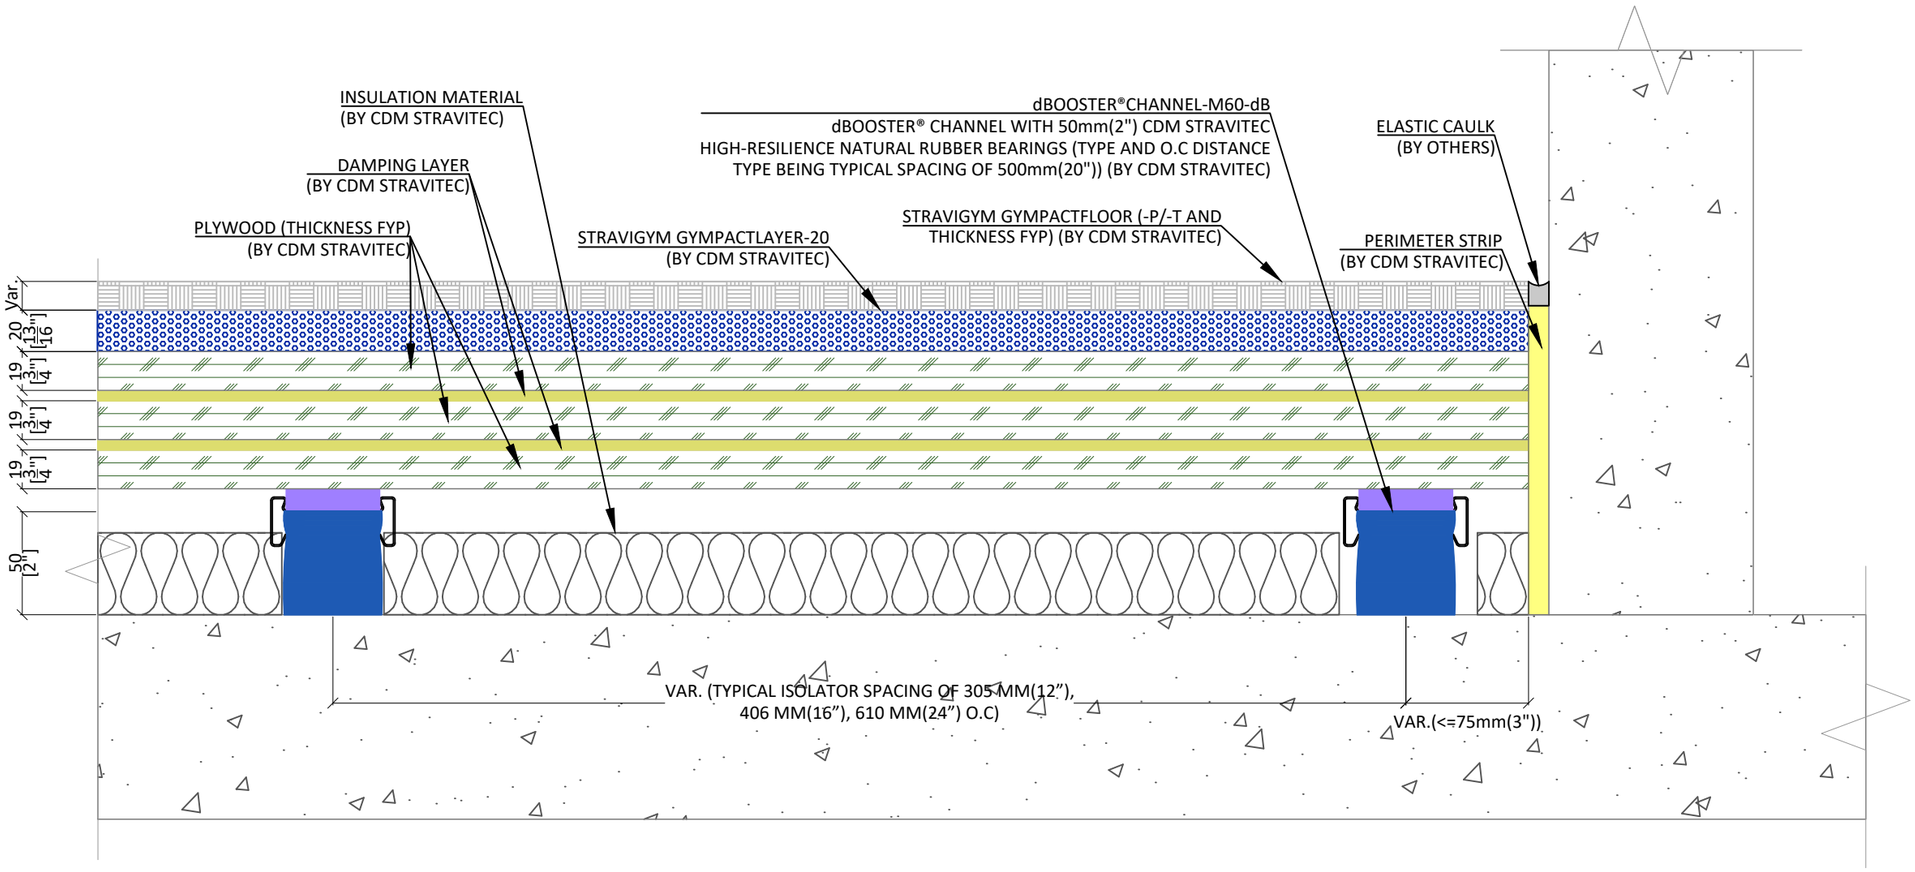

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 156mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM XP W/ dBOOSTER® W/
GYMAPCTLAYER-20 & GYMPACTFLOOR

Typical sections_Stravigym XP (US-CA)-04


Drawn: VPR 2026/08/21

Design: ----

Check: GGU

Scale: 1 : 3

Format: A3

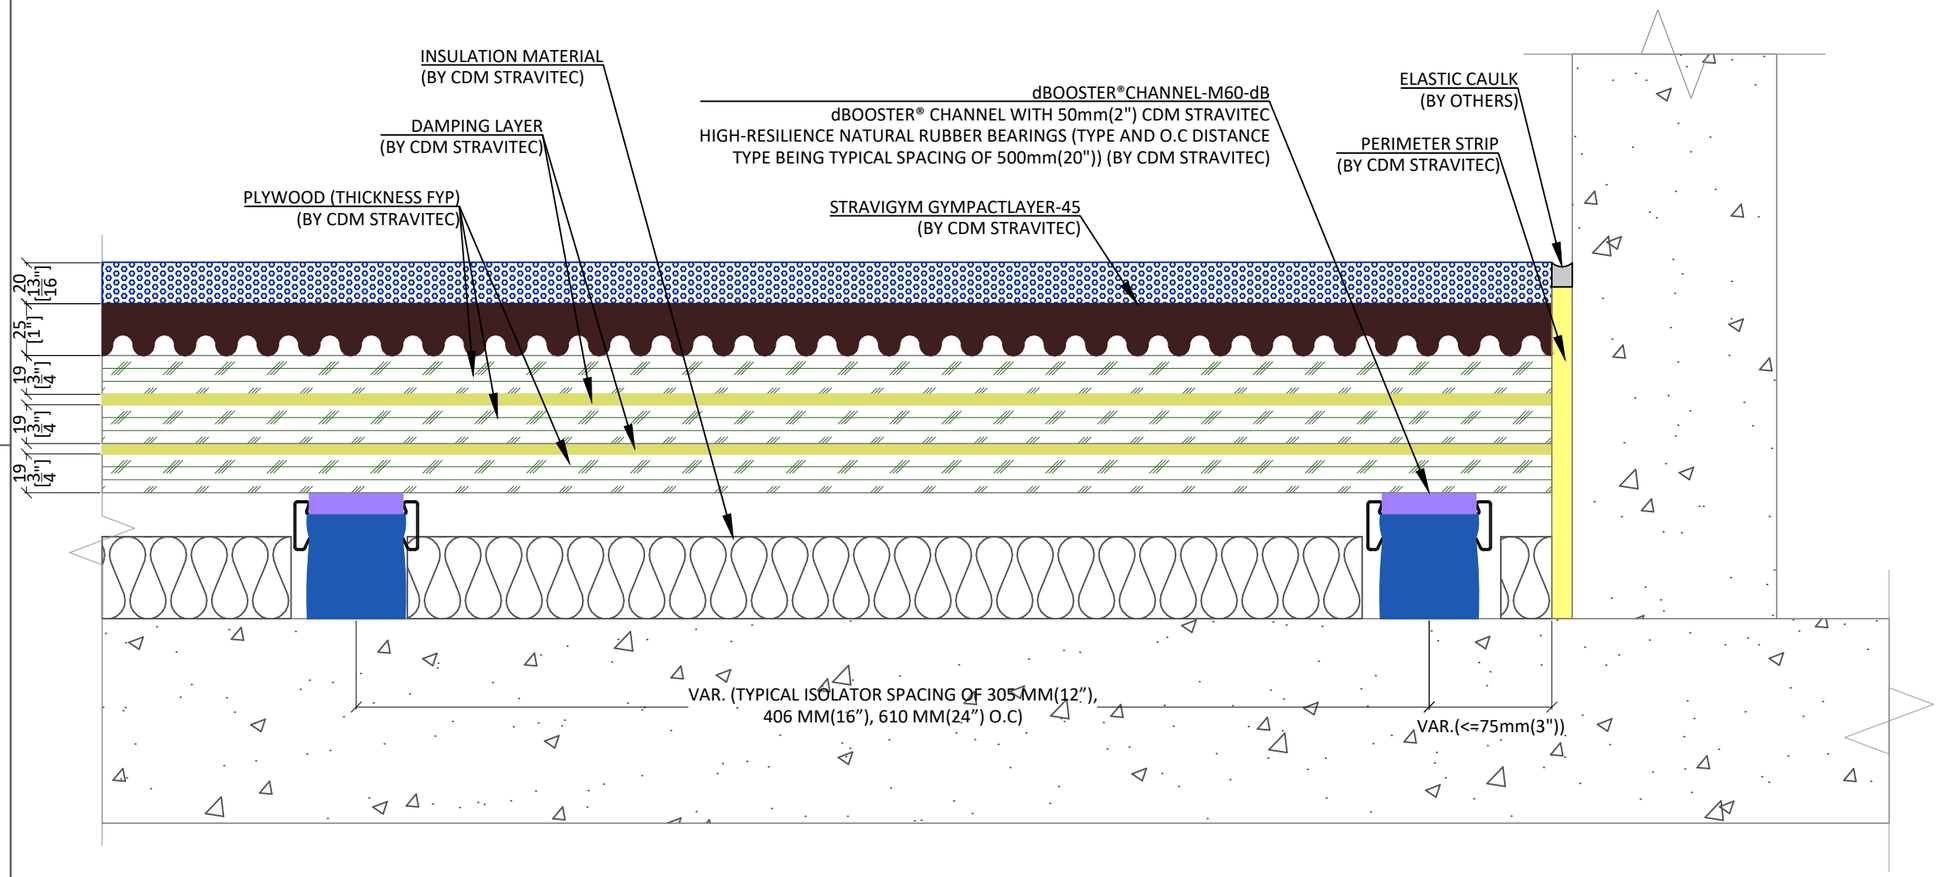

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 171mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM XP W/ dBOOSTER® W/
GYMAPCTLAYER-45

Typical sections_Stravigym XP (US-CA)-05


Drawn:
VPR 2026/08/21

Design:

Check:
GGU

Scale:
1 : 3

Format:
A3

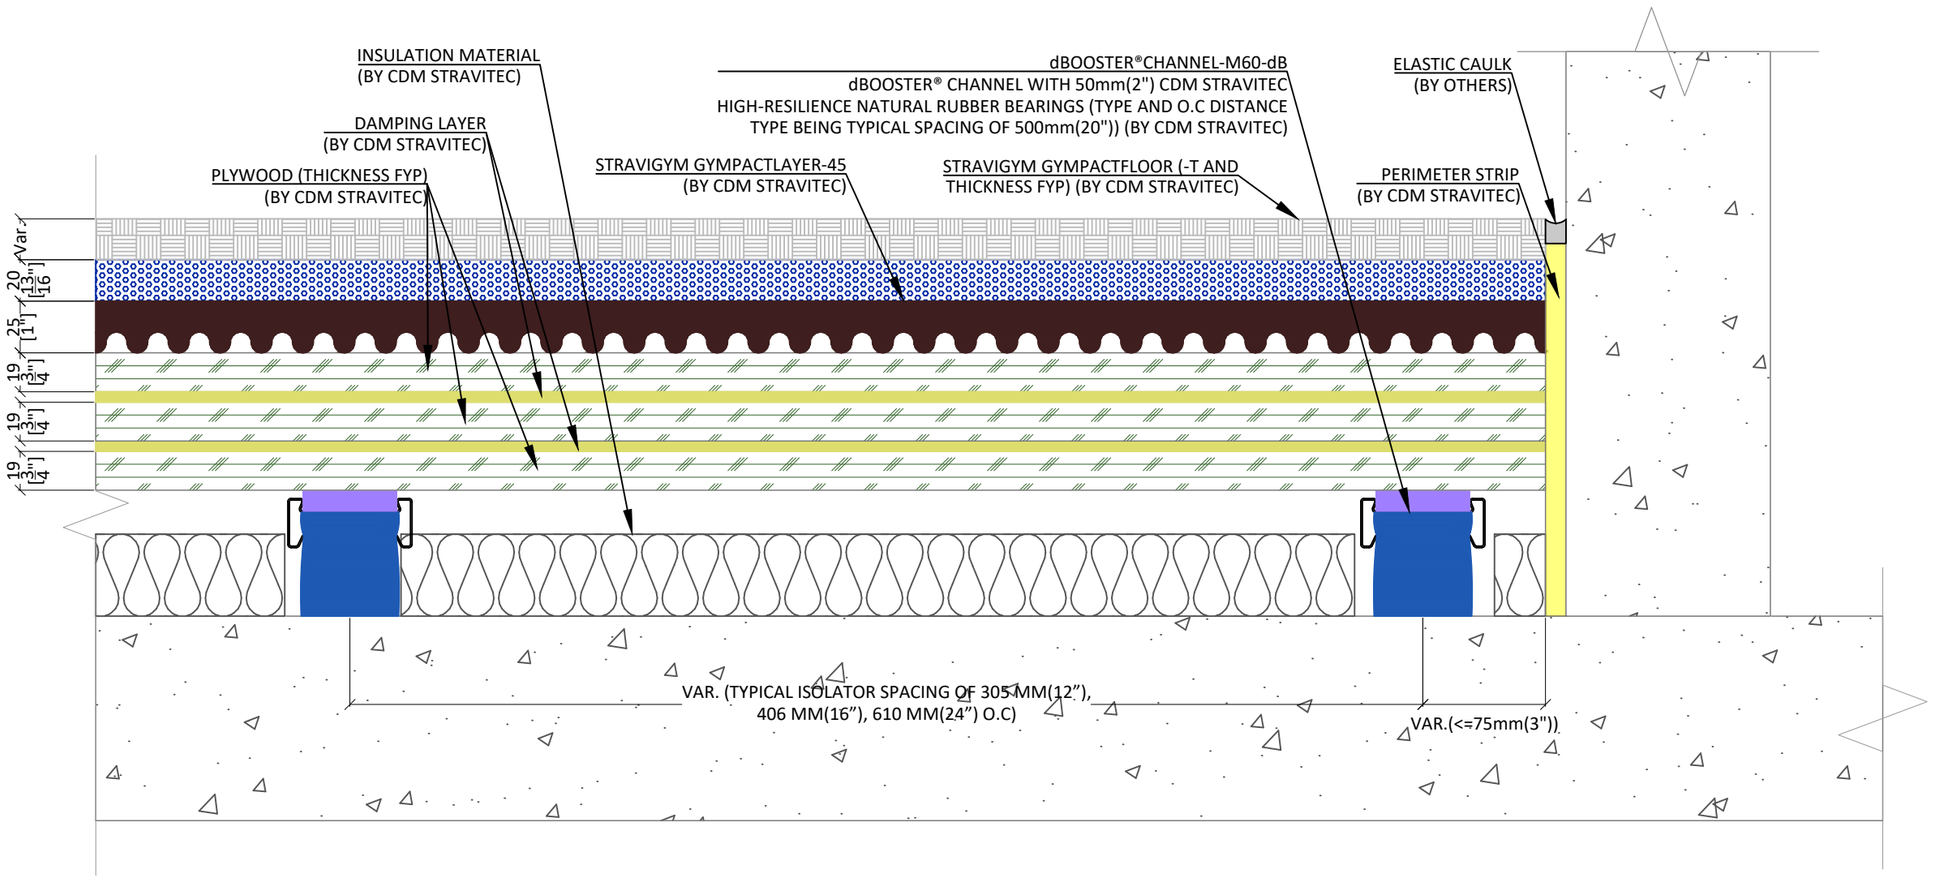

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 191mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM XP W/ dBOOSTER® W/
GYMAPCTLAYER-45 & GYMPACTFLOOR

Typical sections_Stravigym XP (US-CA)-06


Drawn:
VPR 2026/08/21

Design:

Check:
GGU

Scale:
1 : 3

Format:
A3

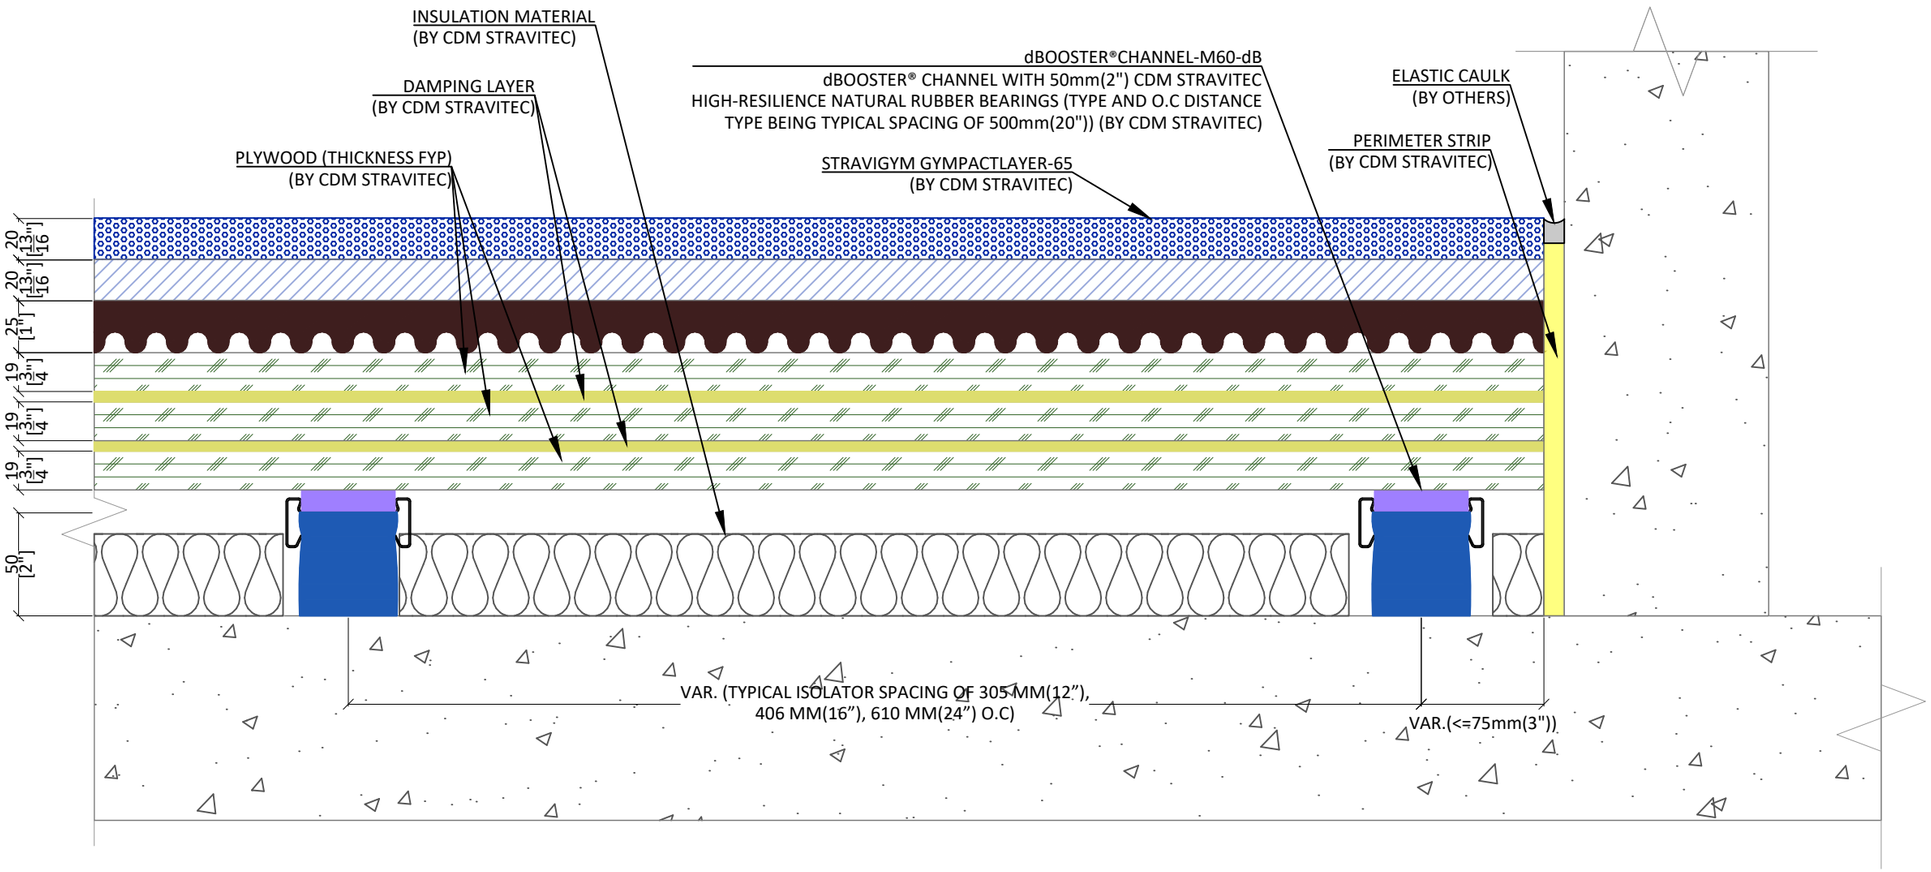

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 191mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM XP W/ dBOOSTER® W/ GYMAPCTLAYER-65

Typical sections_Stravigym XP (US-CA)-07


Drawn:
VPR 2026/08/21

Design:

Check:
GGU

Scale:
1 : 3

Format:
A3

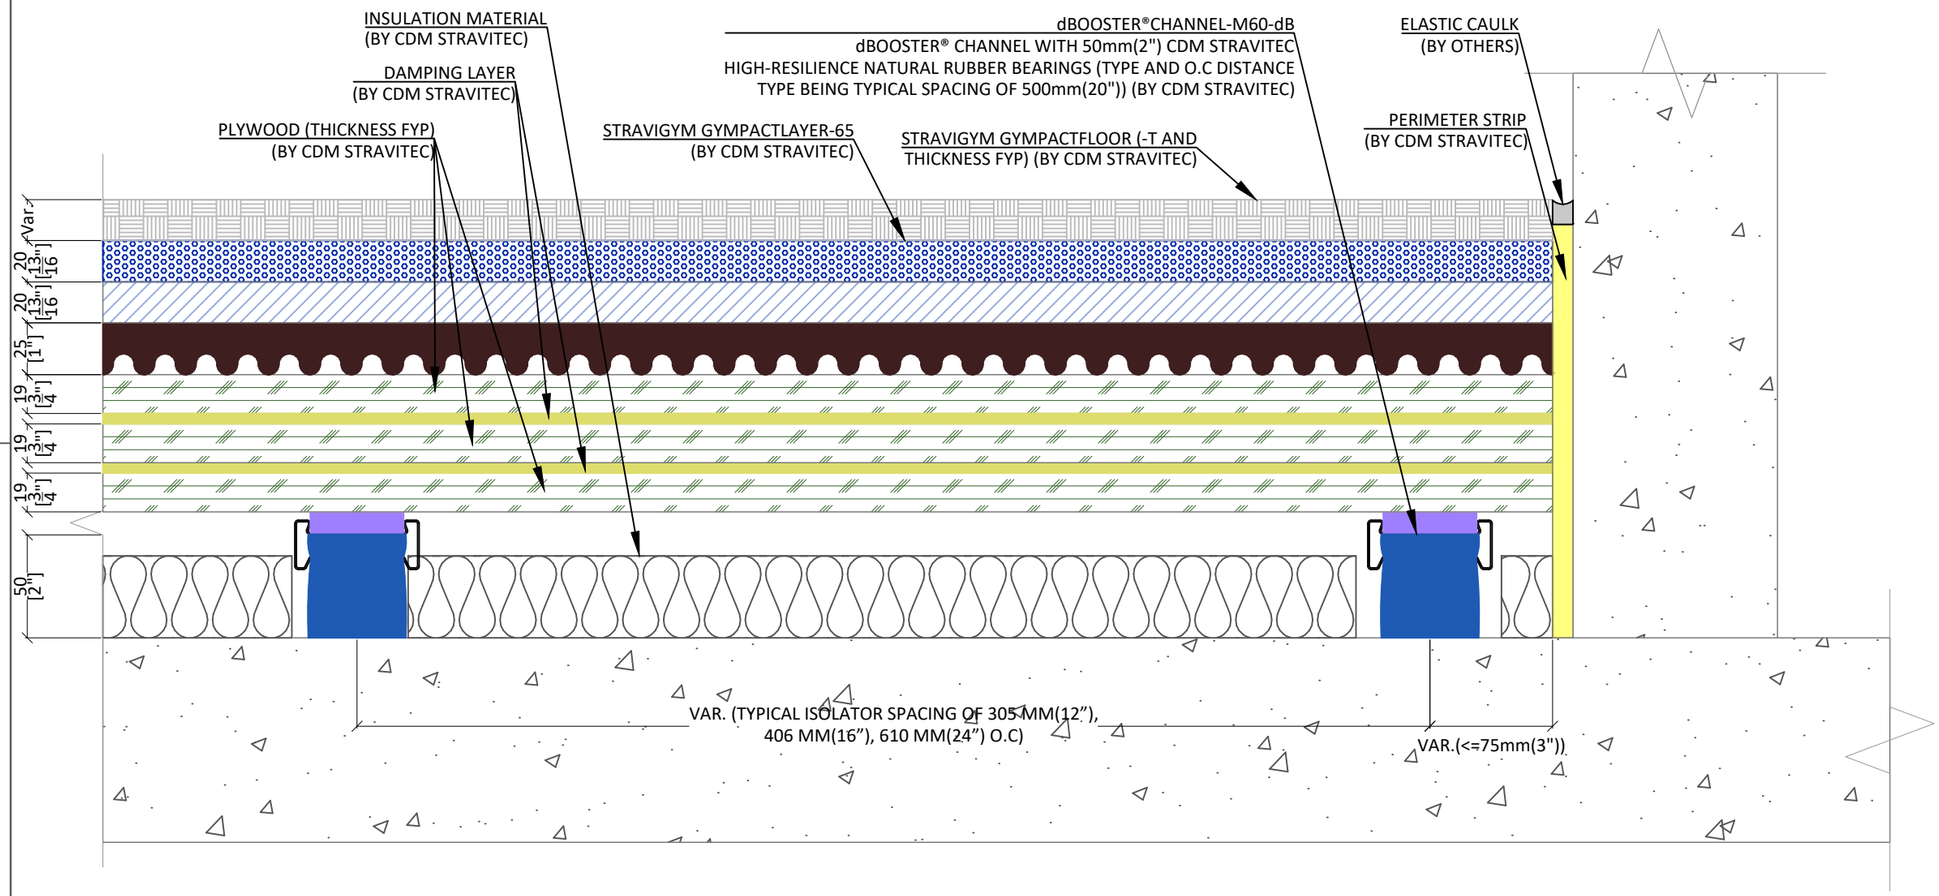

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 211mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM XP W/ dBOOSTER® W/ GYMAPCTLAYER-65 & GYMPACTFLOOR

Typical sections_Stravigym XP (US-CA)-08


Drawn: VPR 2026/08/21

Design: ----

Check: GGU

Scale: 1 : 3

Format: A3

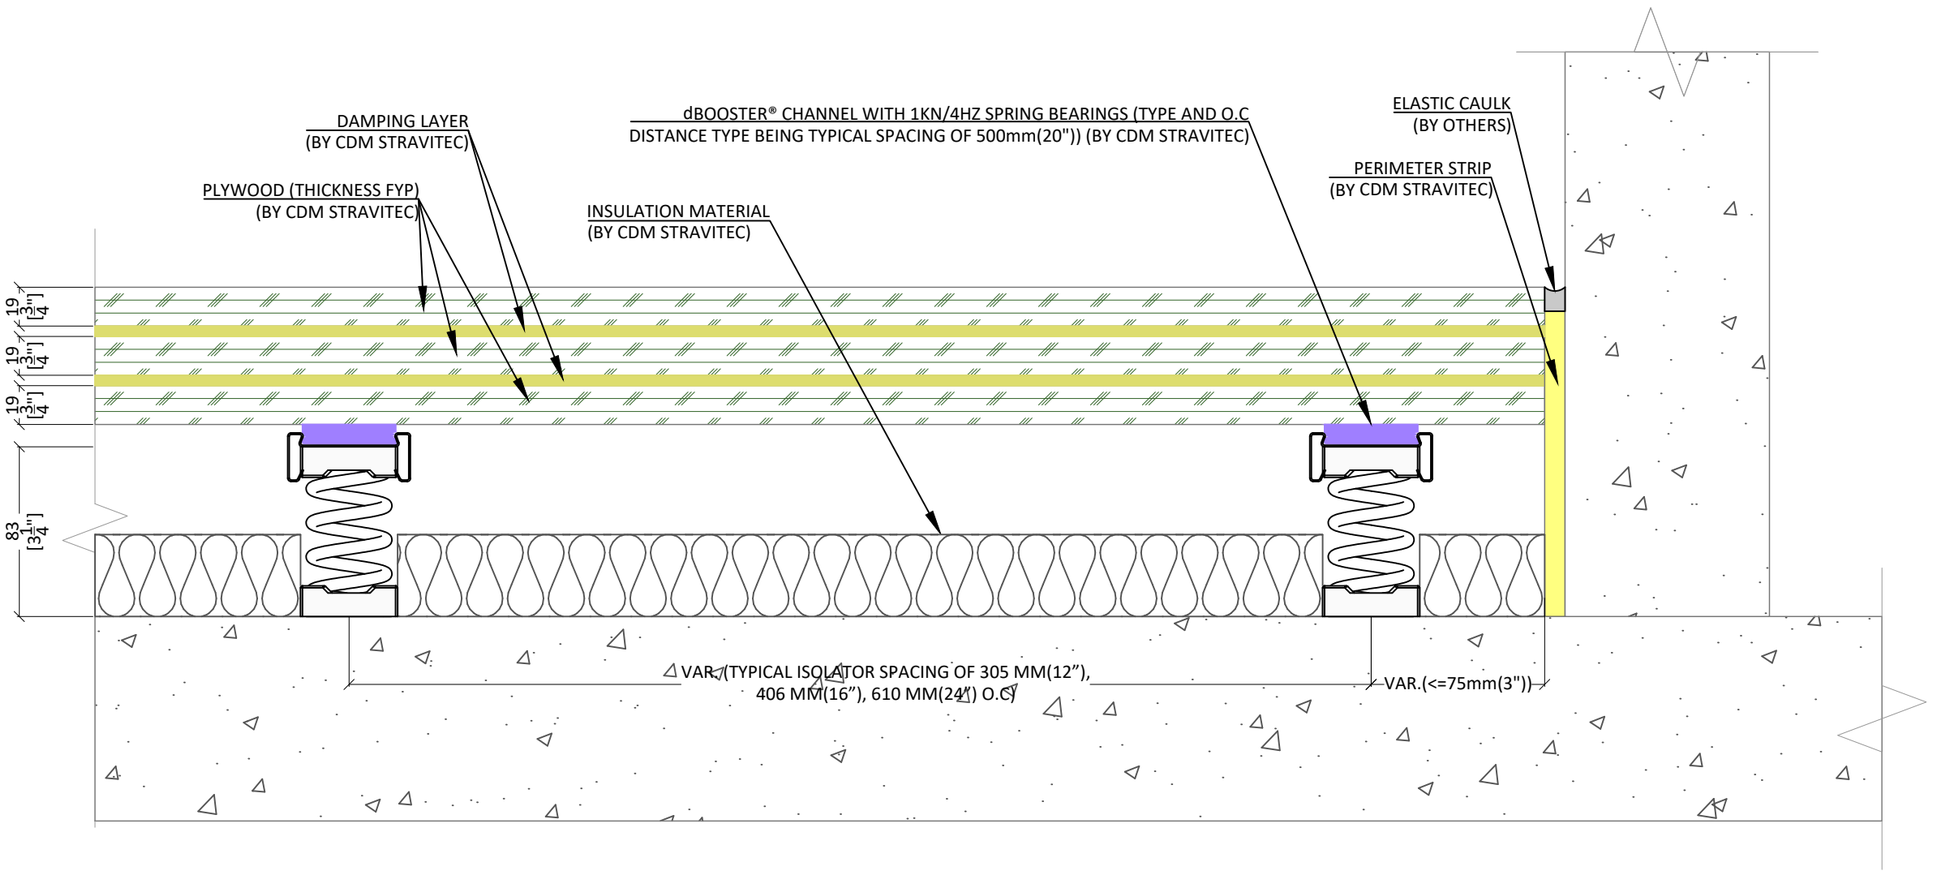

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 161mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM XP W/ dBOOSTER® & SPRINGS

Typical sections_Stravigym XP (US-CA)-09


Drawn:
VPR 2026/08/21

Design:

Check:
GGU

Scale:
1 : 3

Format:
A3

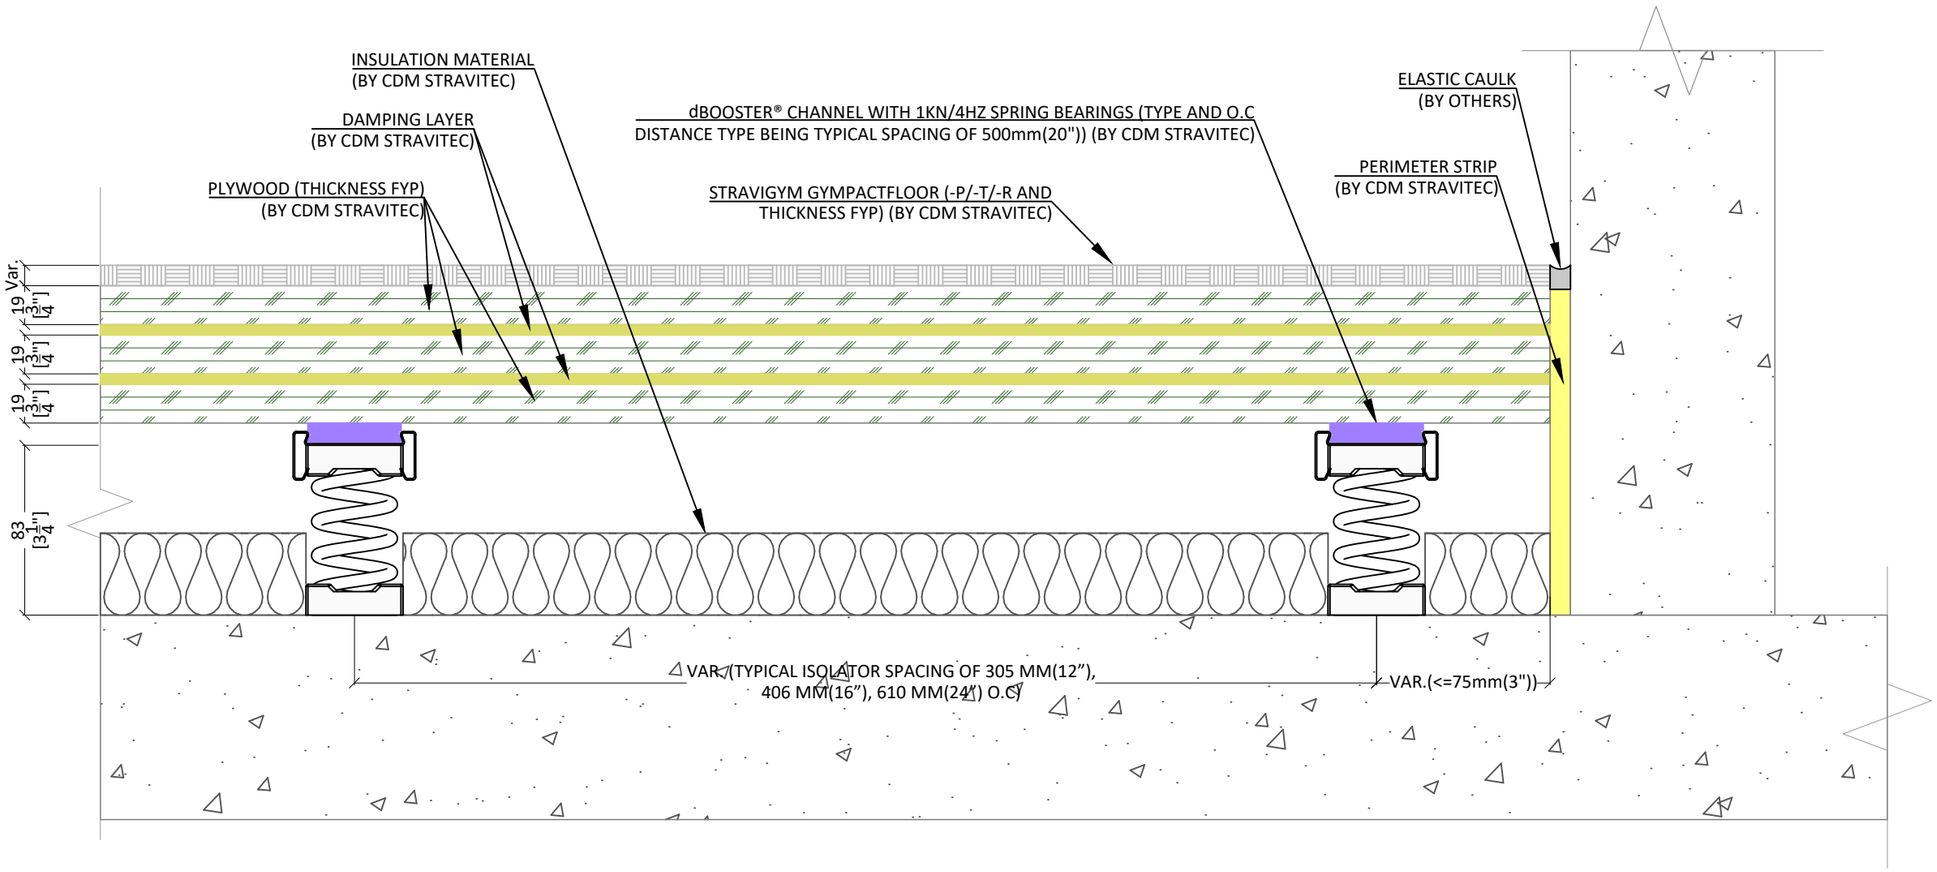

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 171mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM XP W/ dBOOSTER® & SPRINGS, GYMPACTFLOOR

Typical sections_Stravigym XP (US-CA)-10


Drawn:
VPR 2026/08/21

Design:

Check:
GGU

Scale:
1 : 3

Format:
A3

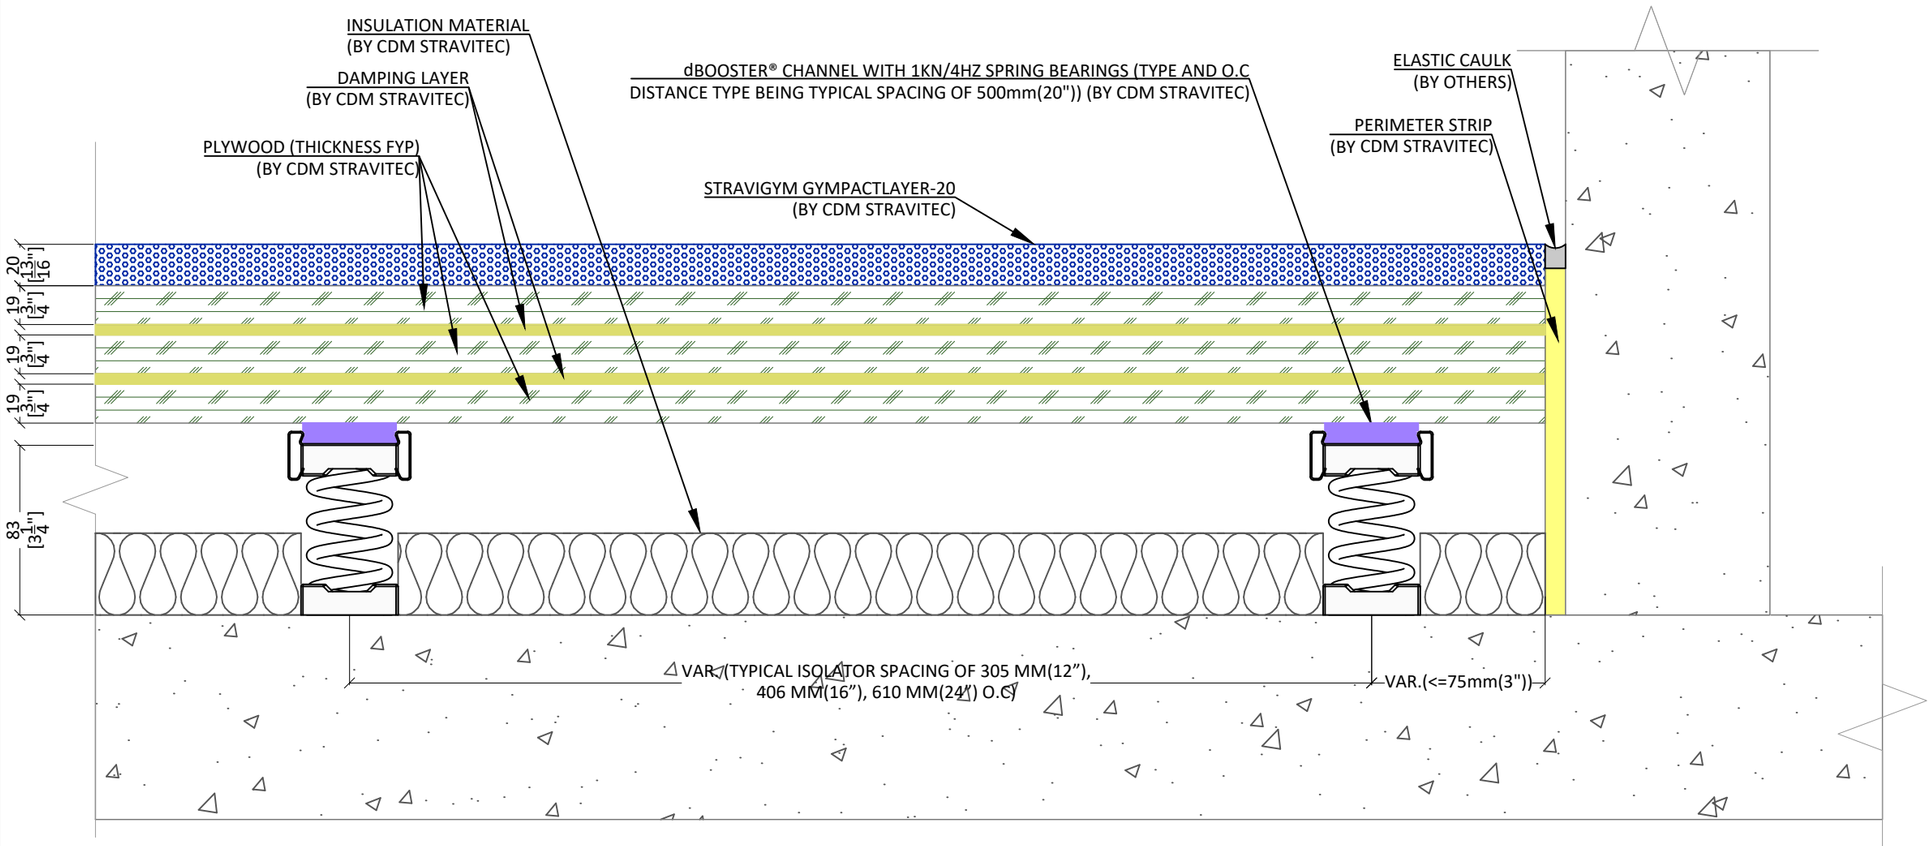

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 181mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM HP W/ dBOOSTER® & SPRINGS, GYMPACTLAYER-20

Typical sections_Stravigym XP (US-CA)-11


Drawn:
VPR 2026/08/21

Design:

Check:
GGU

Scale:
1 : 3

Format:
A3

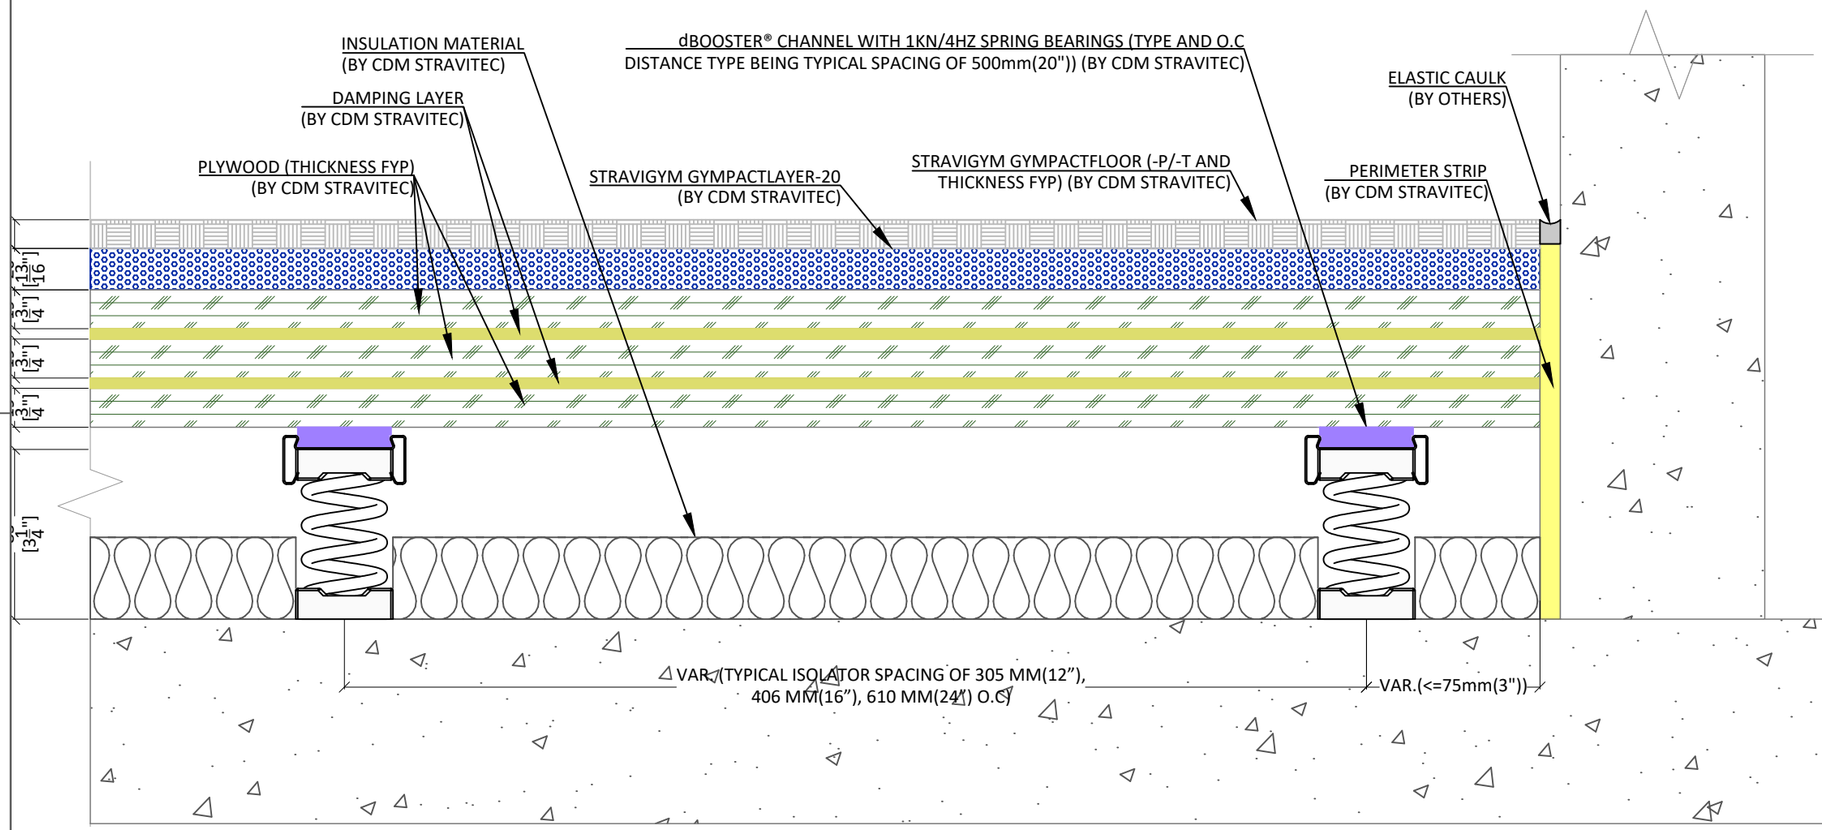

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 191mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM HP W/ dBOOSTER® & SPRINGS, GYMPACTLAYER-20 & GYMPACTFLOOR

Typical sections_Stravigym XP (US-CA)-12


Drawn: VPR 2026/08/21

Design: ----

Check: GGU

Scale: 1 : 3

Format: A3

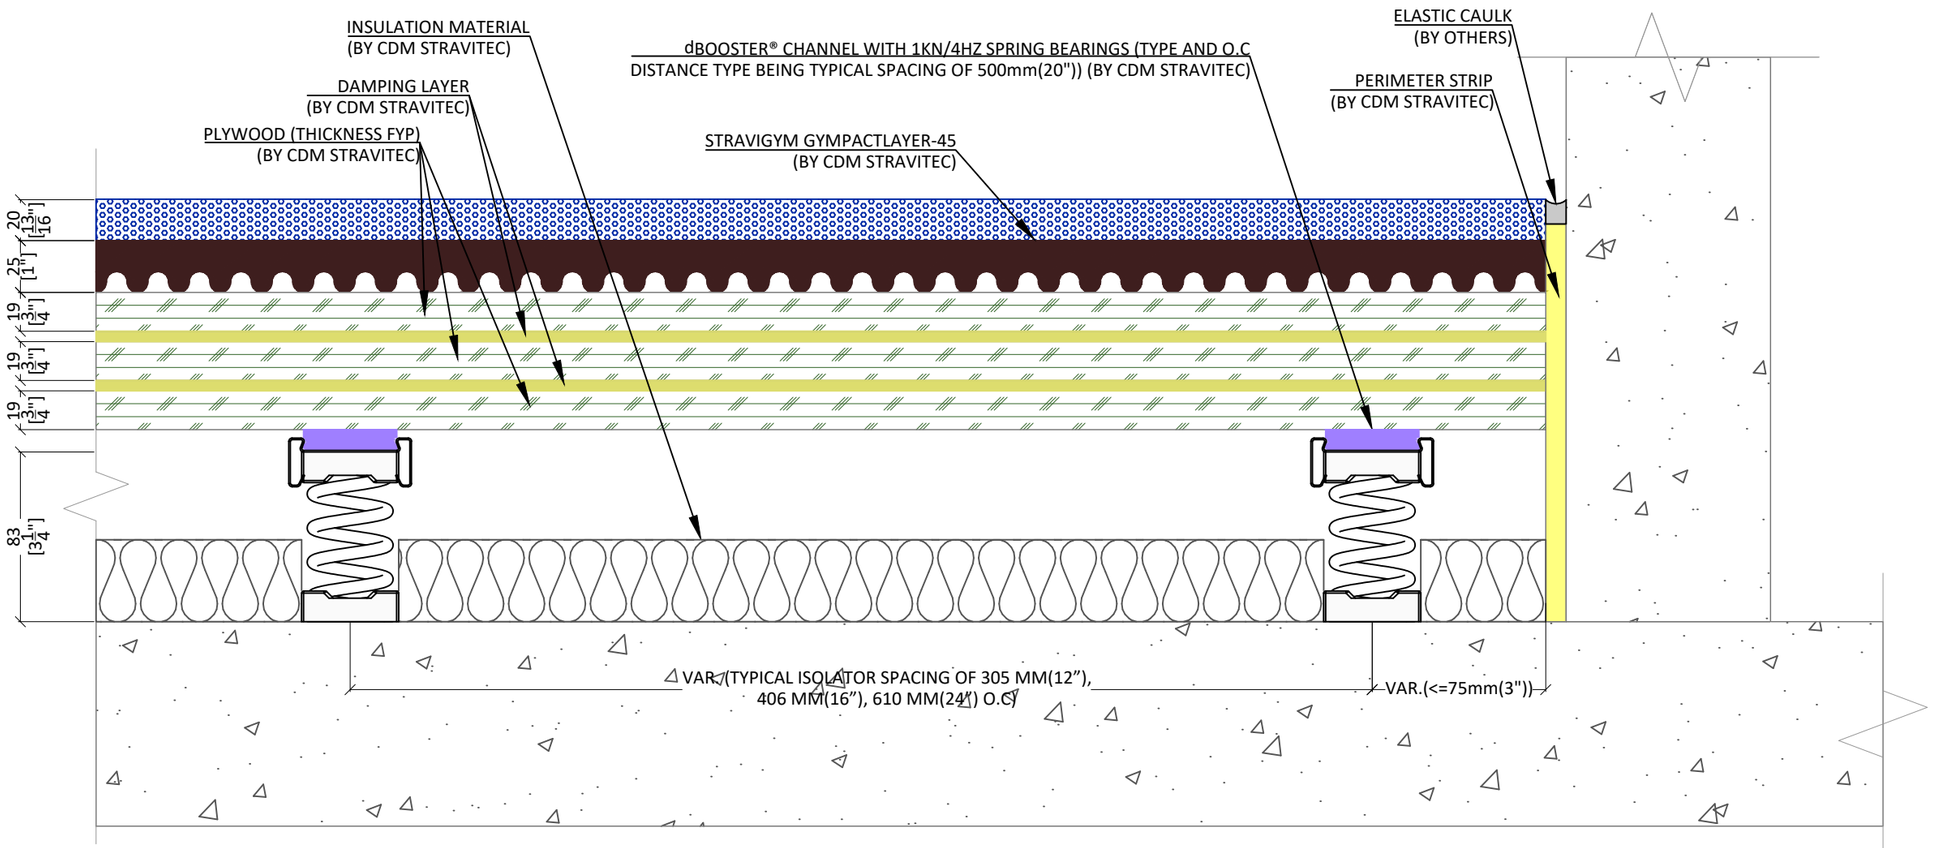

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 206mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM HP W/ dBOOSTER® & SPRINGS, GYMPACTLAYER-45

Typical sections_Stravigym XP (US-CA)-13


Drawn:
VPR 2026/08/21

Design:

Check:
GGU

Scale:
1 : 3

Format:
A3

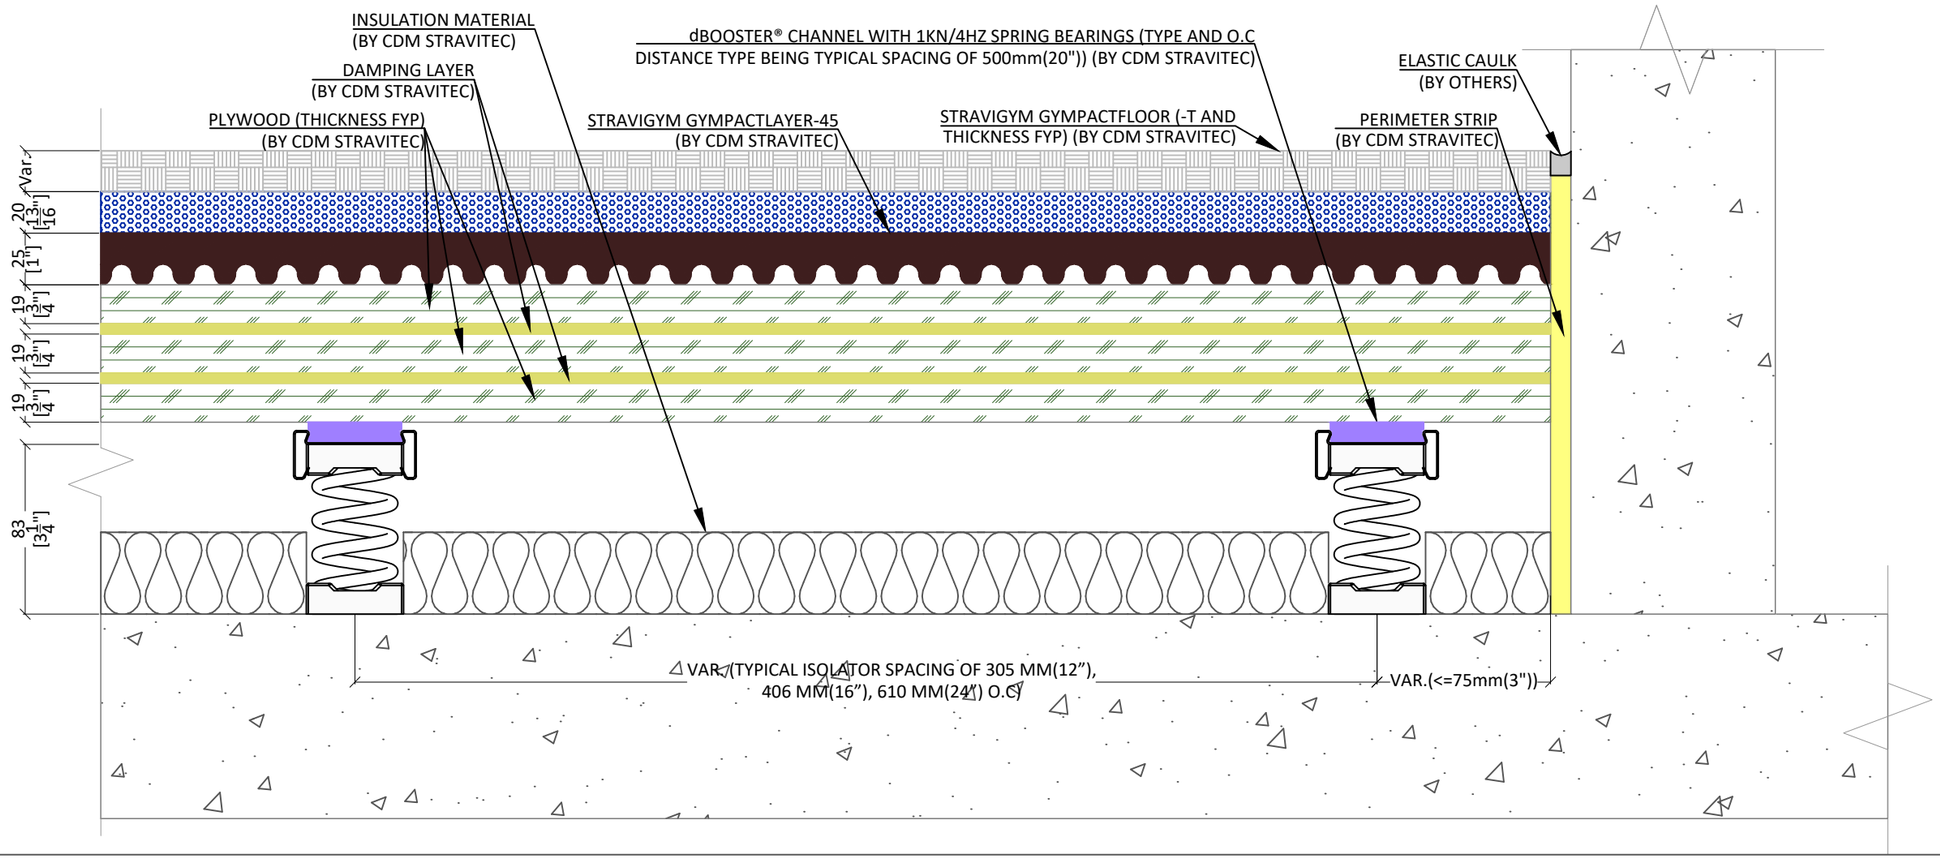

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 226mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM HP W/ dBOOSTER® & SPRINGS, GYMPACTLAYER-45 & GYMPACTFLOOR

Typical sections_Stravigym XP (US-CA)-14


Drawn: VPR 2026/08/21

Design: ----

Check: GGU

Scale: 1 : 3

Format: A3

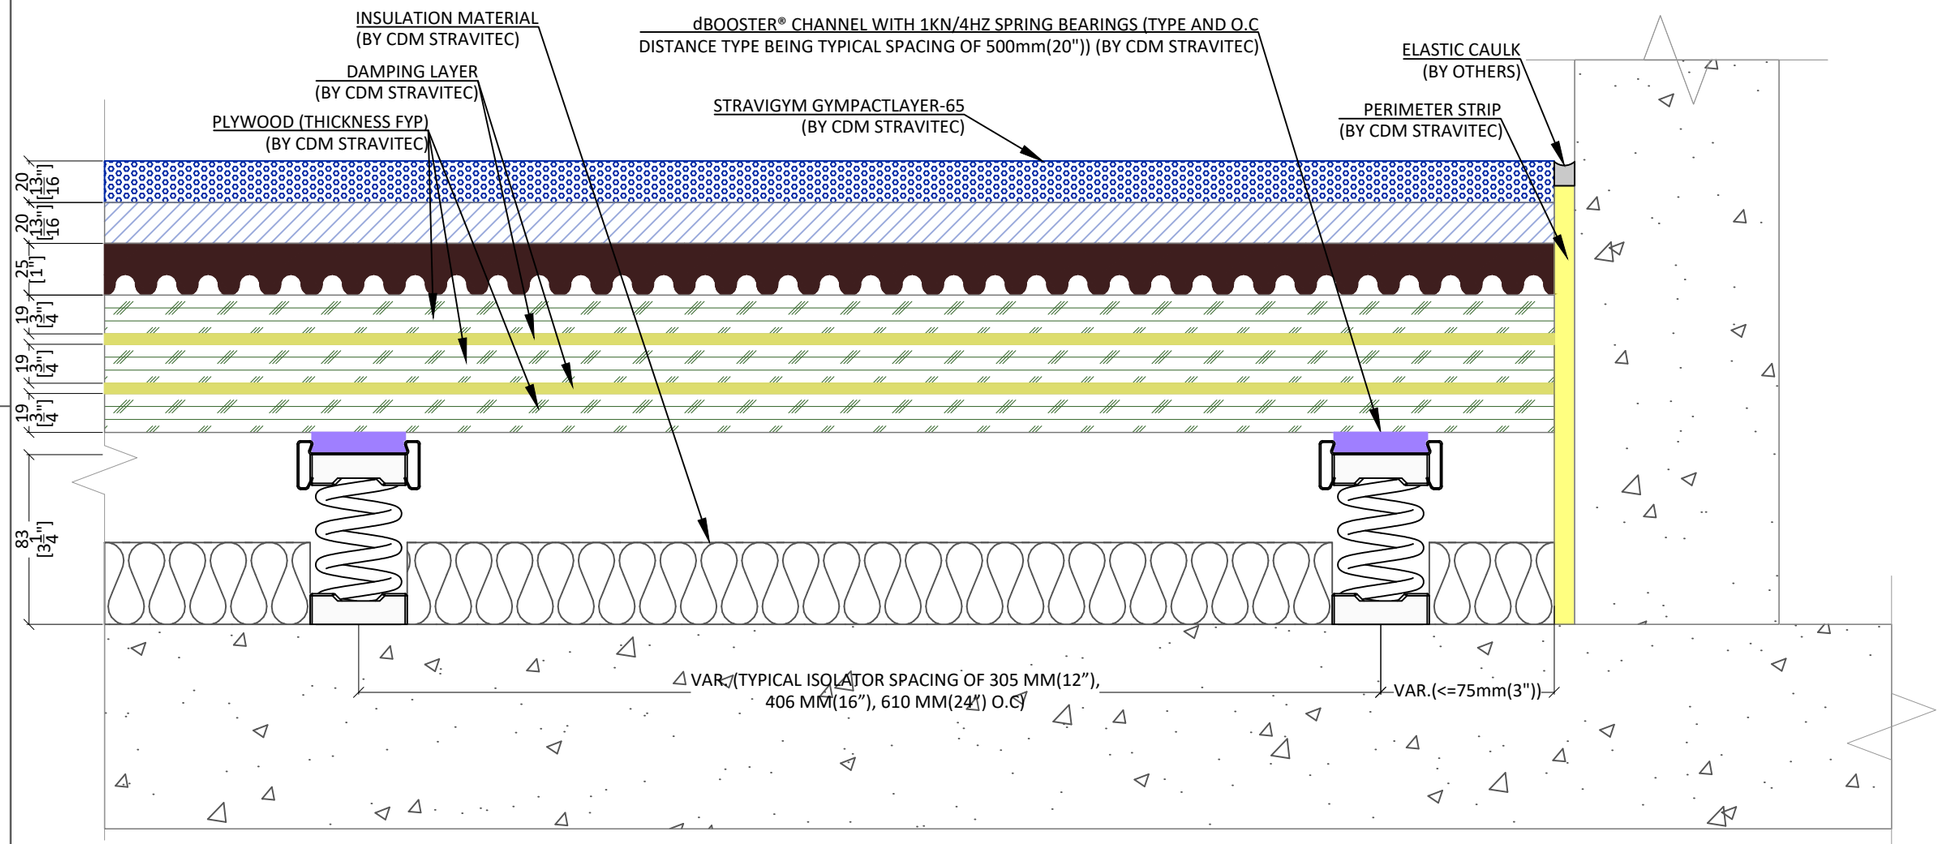

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 226mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM HP W/ dBOOSTER® & SPRINGS, GYMPACTLAYER-65

Typical sections_Stravigym XP (US-CA)-15


Drawn:
VPR 2026/08/21

Design:

Check:
GGU

Scale:
1 : 3

Format:
A3

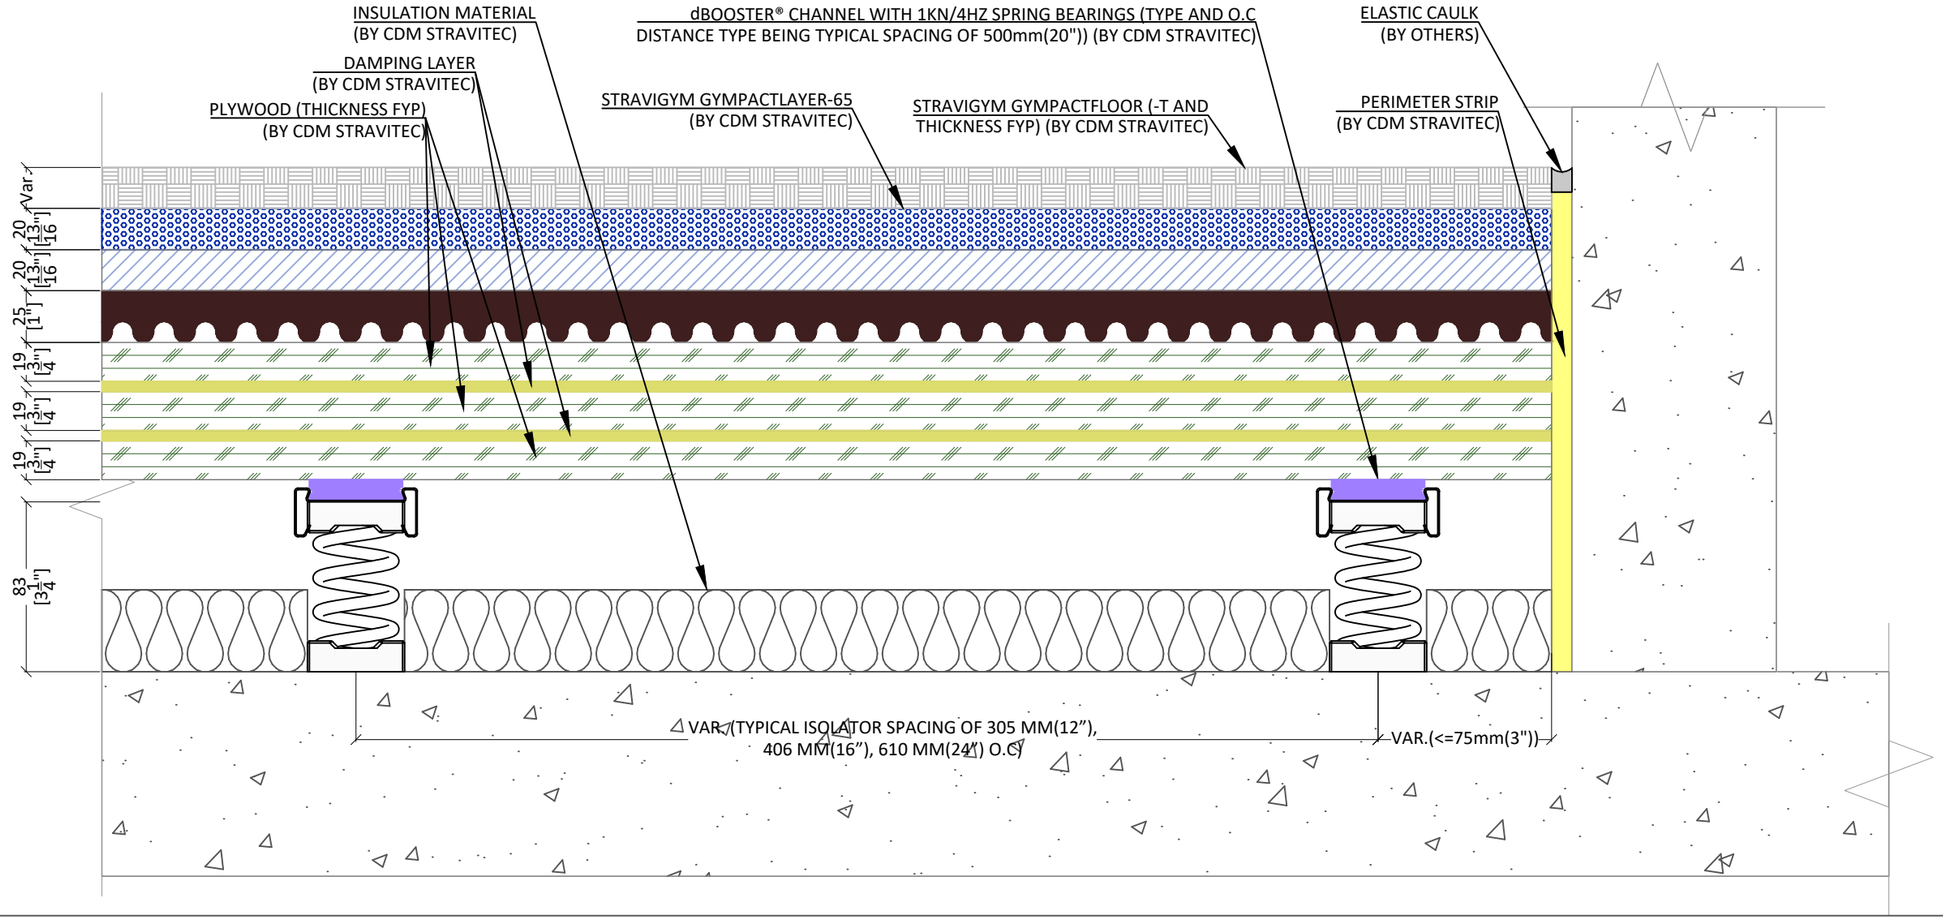

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm).
It should be dry and free of obstacles, discontinuities, dust, etc.
2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.
3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLETION): 246mm

Legend

Revision Description	Date	Drawn	Rev.
Second submission	2026/08/21	VPR	B
First submission	2025/11/27	VPR	A

Load table

Drawing based on

---

100 Sunrise Avenue, Unit 202
Toronto, Ontario, M4A 1B3
Canada
PH: +1 905 265 7401
info-ca@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

STRAVIGYM HP W/ dBOOSTER® & SPRINGS, GYMPACTLAYER-65 & GYMPACTFLOOR

Typical sections_Stravigym XP (US-CA)-16

Drawn: VPR 2026/08/21

Design: ----

Check: GGU

Scale: 1 : 3

Format: A3