


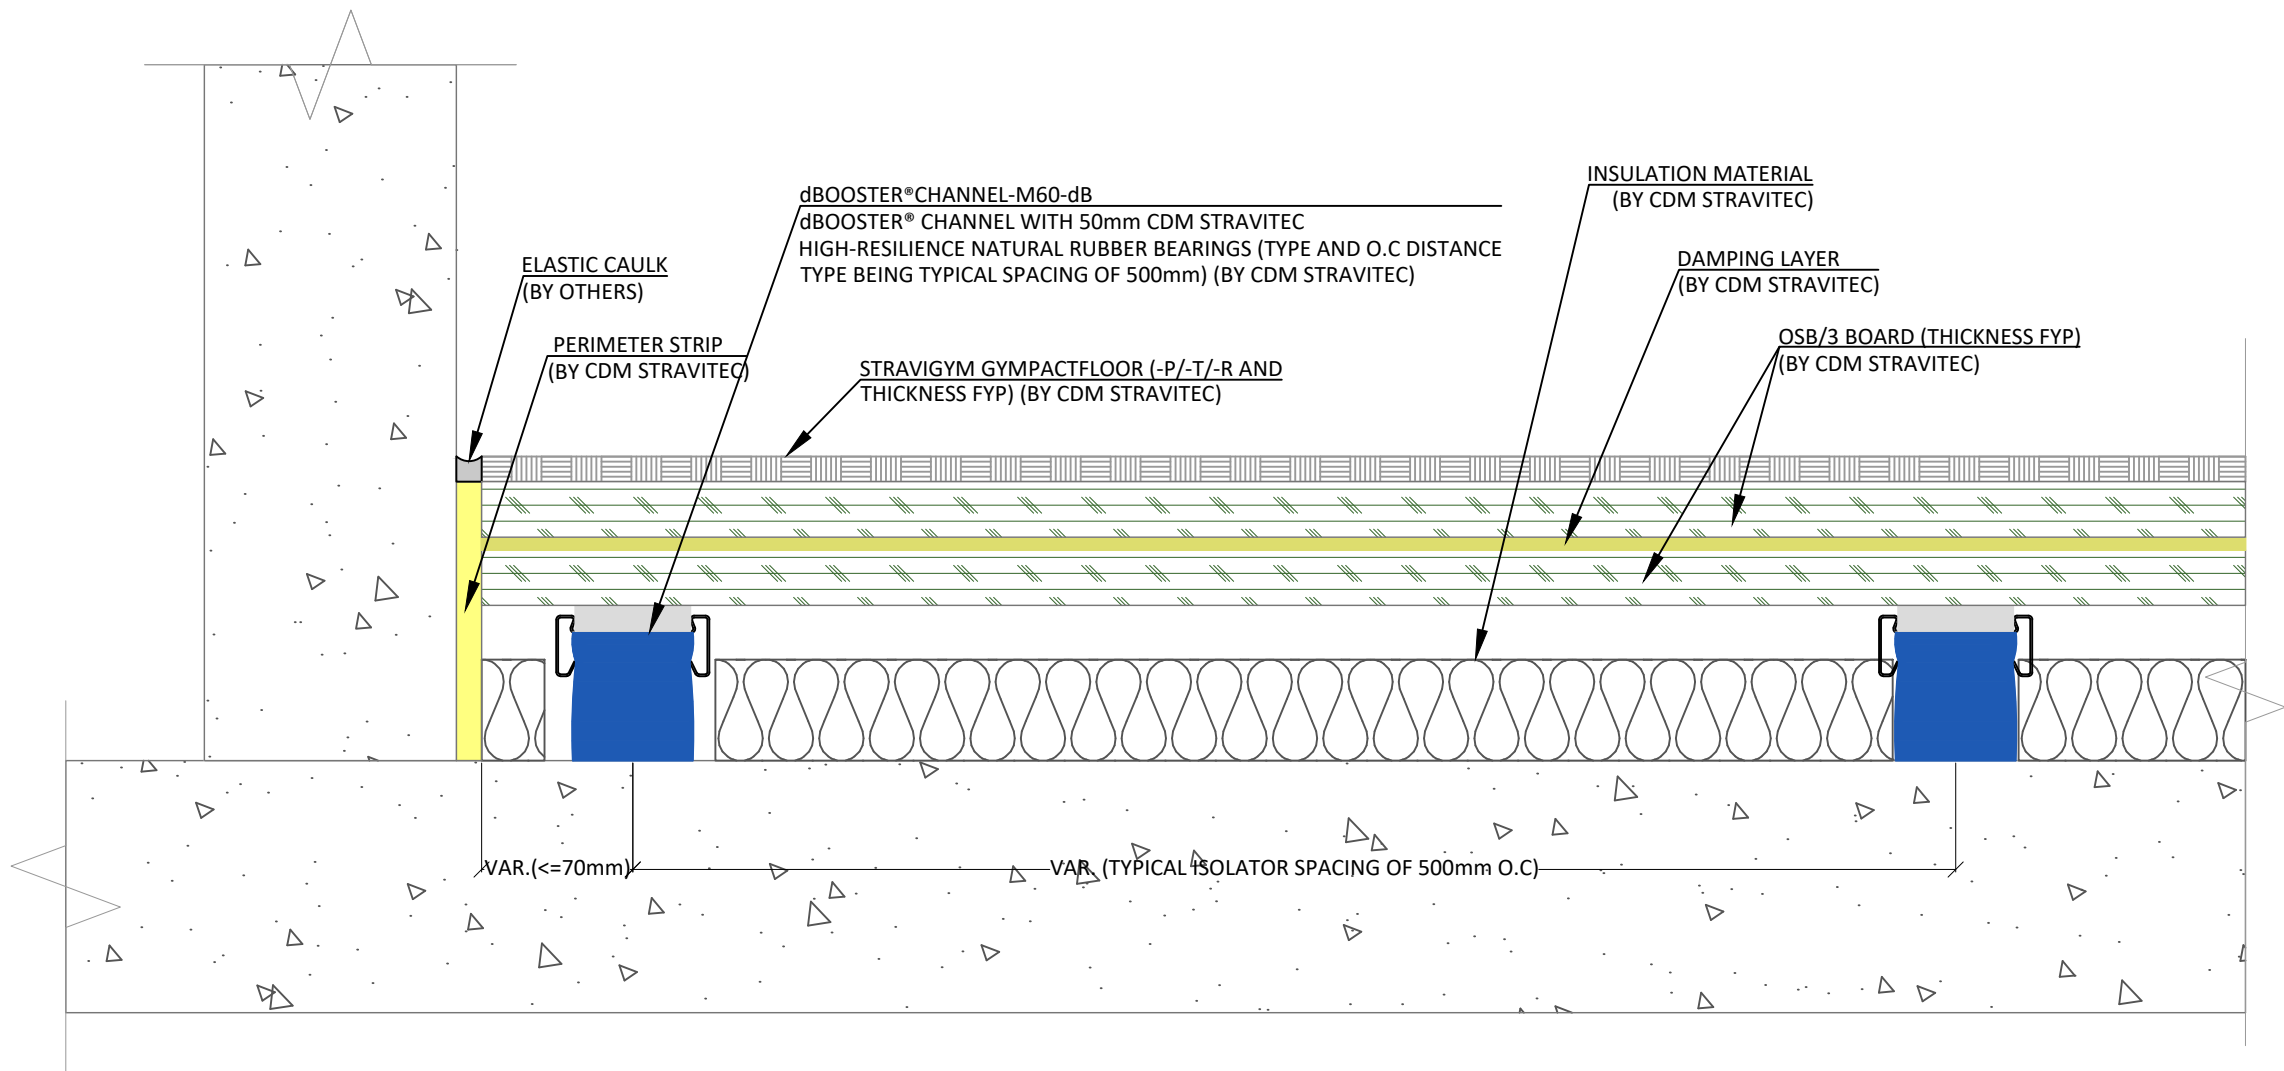

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 121mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

Stravigym XP Compact-M60-dB (with Gypmactfloor)

Typical Cross Sections - Stravigym Compact XP (EU)-01

Drawn: VPR 21/08/2026

Design: _____


Check: _____

GGU

Scale: 1 : 3

Format: A3

Page 01 of 16

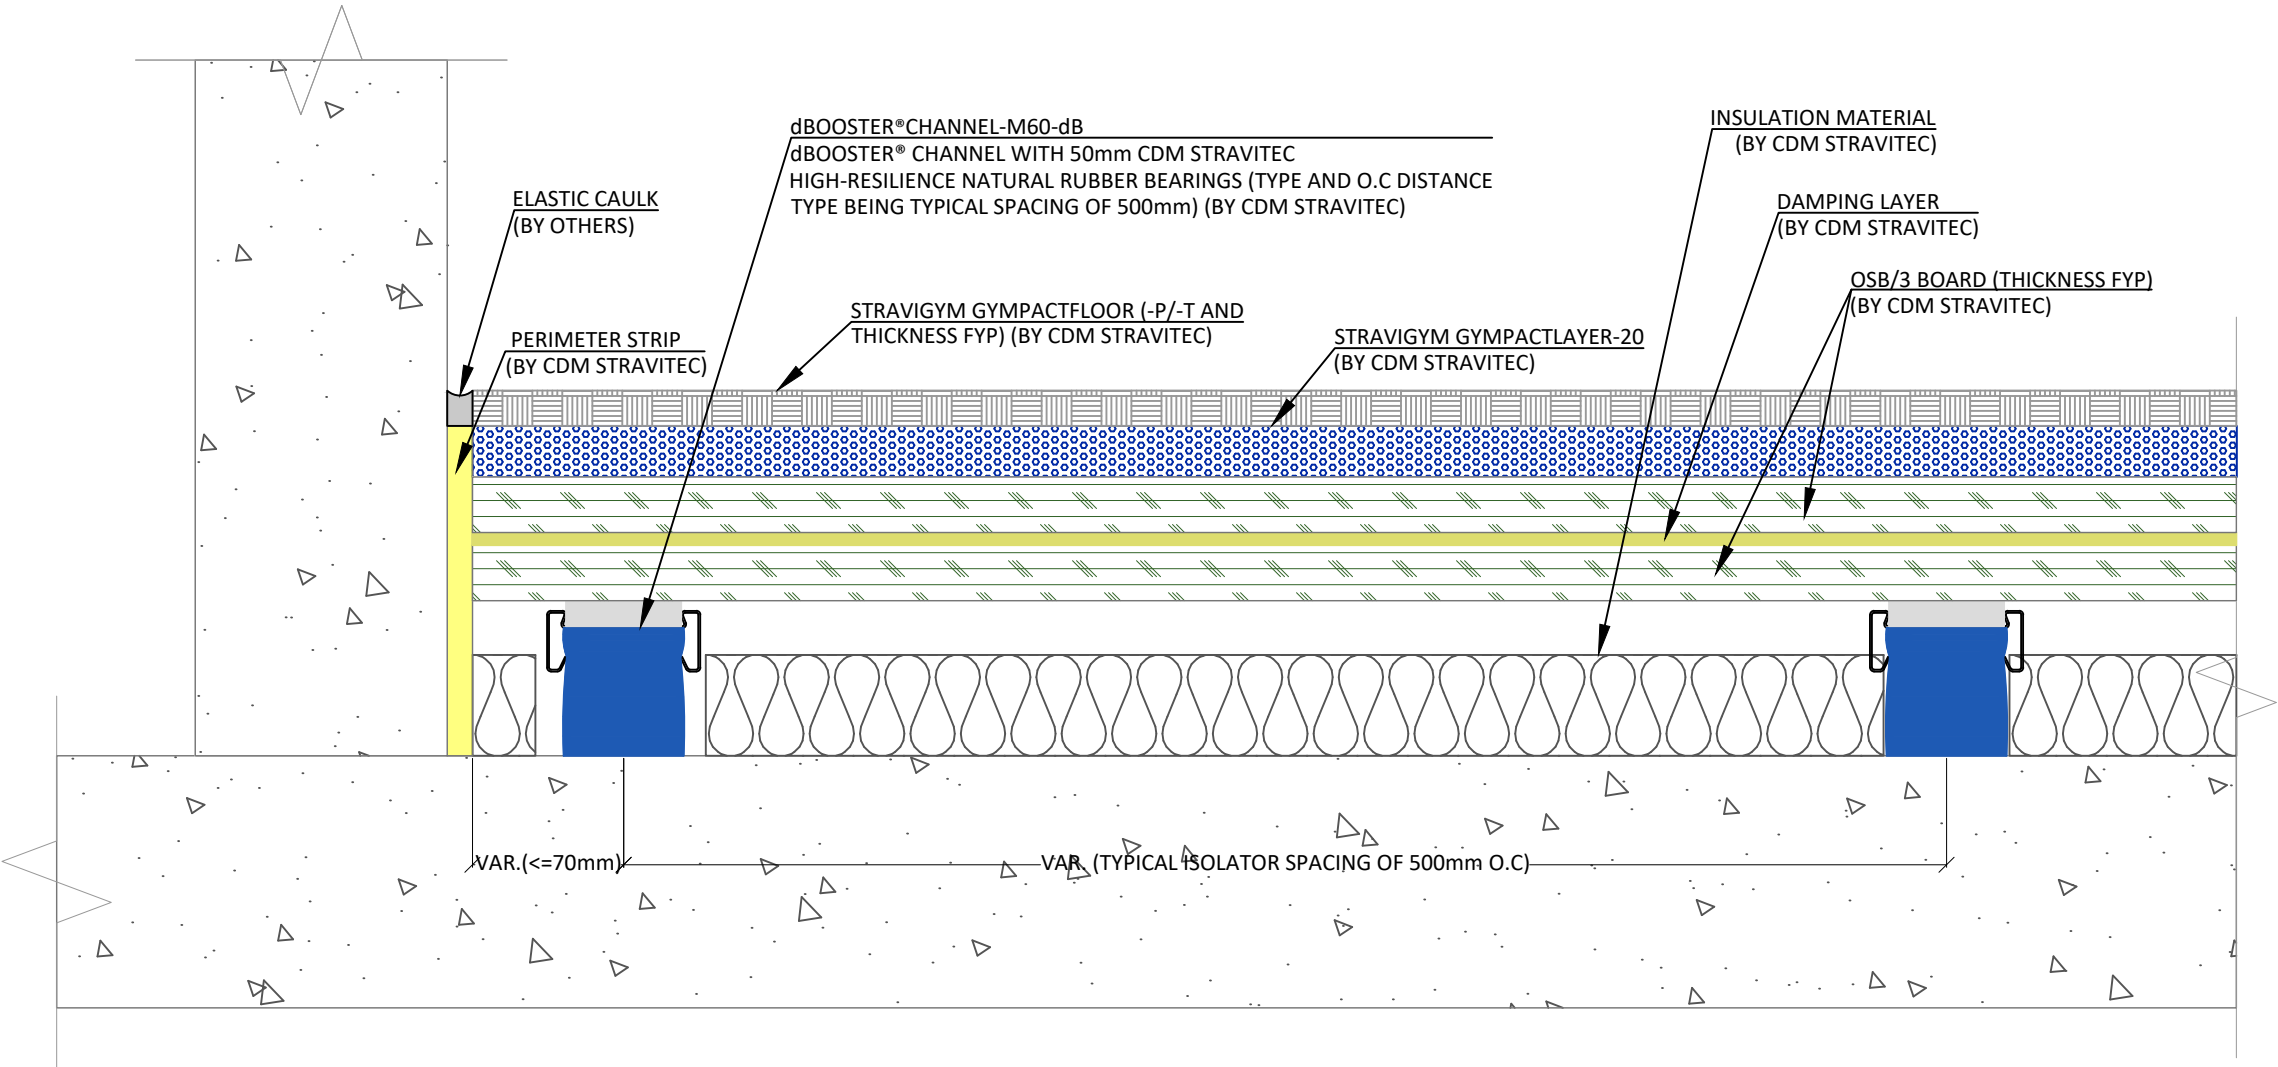

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 145mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

Stravigym XP Compact-S20-M60-dB (with Gympactfloor)

Typical Cross Sections - Stravigym Compact XP (EU)-02

Drawn: VPR 21/08/2026

Design: -----


Check: -----

GGU

Scale: 1 : 3

Format: A3

Page 02 of 16

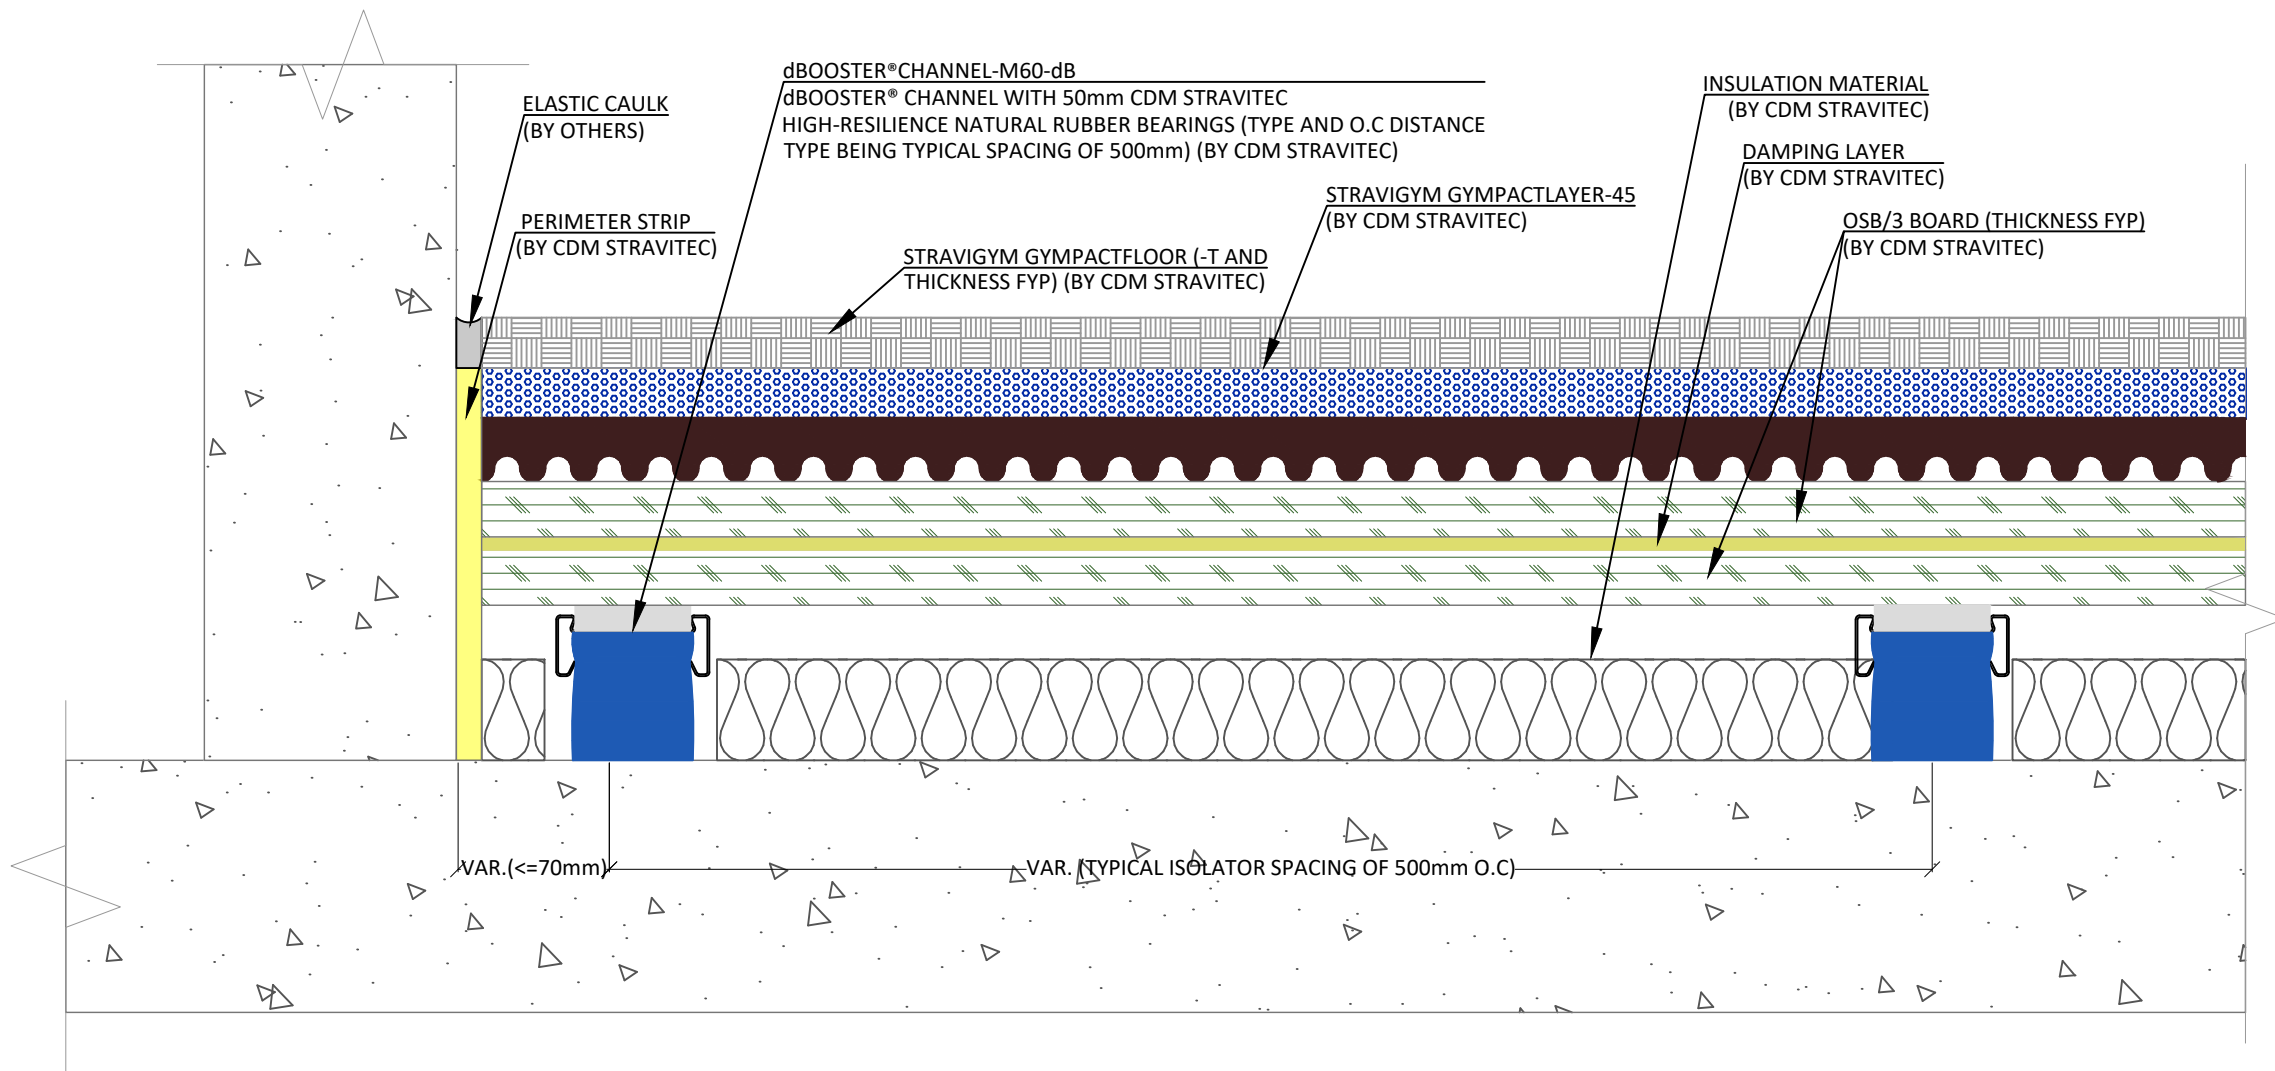

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 176mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

Stravigym XP Compact-D45-M60-dB (with Gympactfloor)

Typical Cross Sections - Stravigym Compact XP (EU)-03

Drawn: VPR 21/08/2026

Design: _____


Check: _____

GGU

Scale: 1 : 3

Format: A3

Page 03 of 16

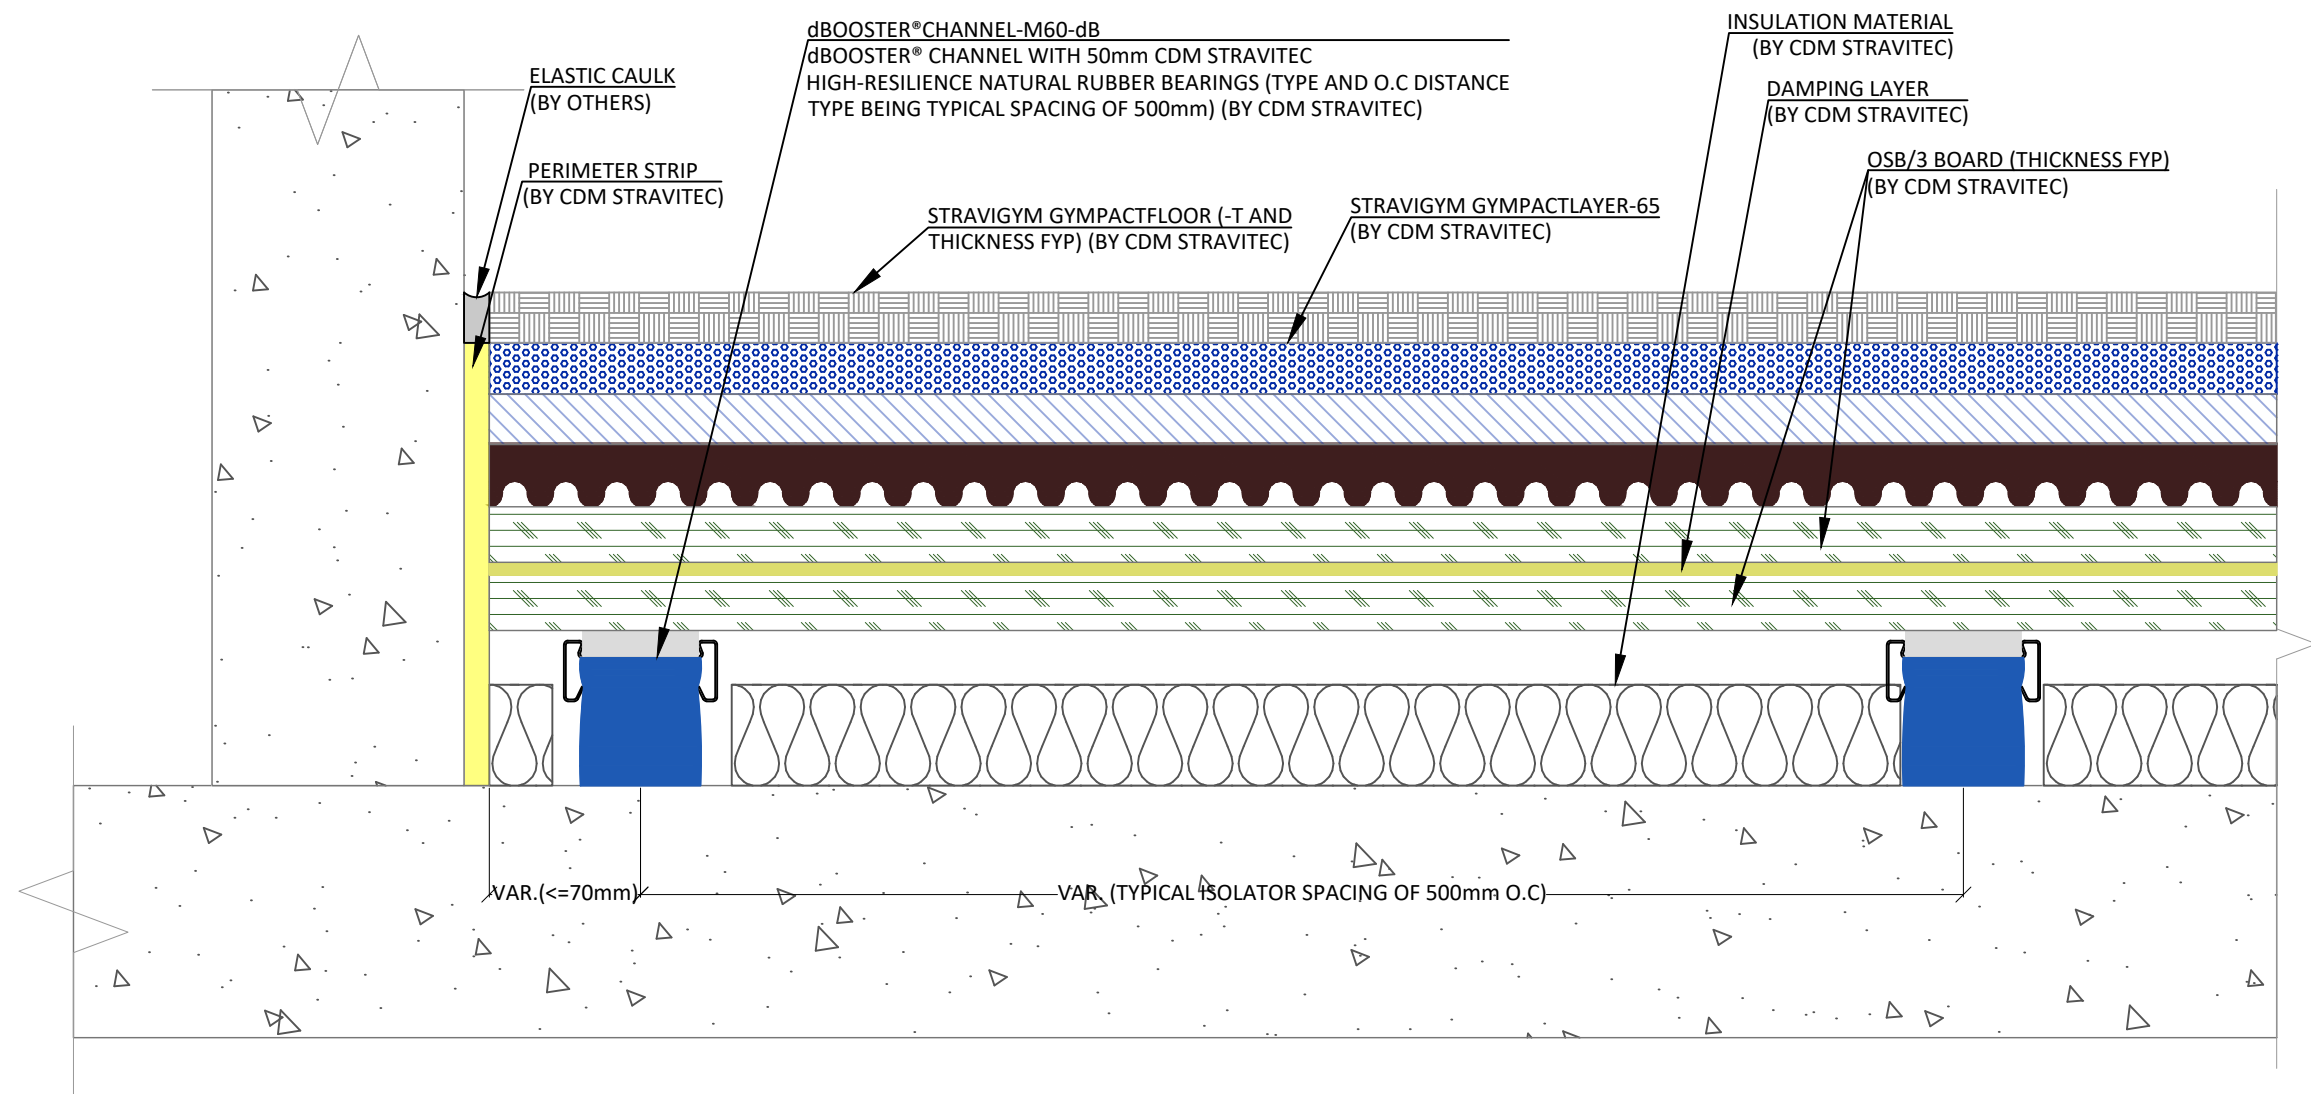

Notes

System

Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 196mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on

cdm

stravitec

Reutenbeek 9-11

B-3090 Overijse Belgium

PH: +32 2 687 79 07

FX: +32 2 687 35 52

info@cdm-stravitec.com

www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

Stravigym XP Compact-T65-M60-dB (with Gypactfloor)

Typical Cross Sections - Stravigym Compact XP (EU)-04

Drawn:

VPR

21/08/2026

Design:

Check:

GGU


Scale:

1 : 3

Format:

A3

Page 04 of 16

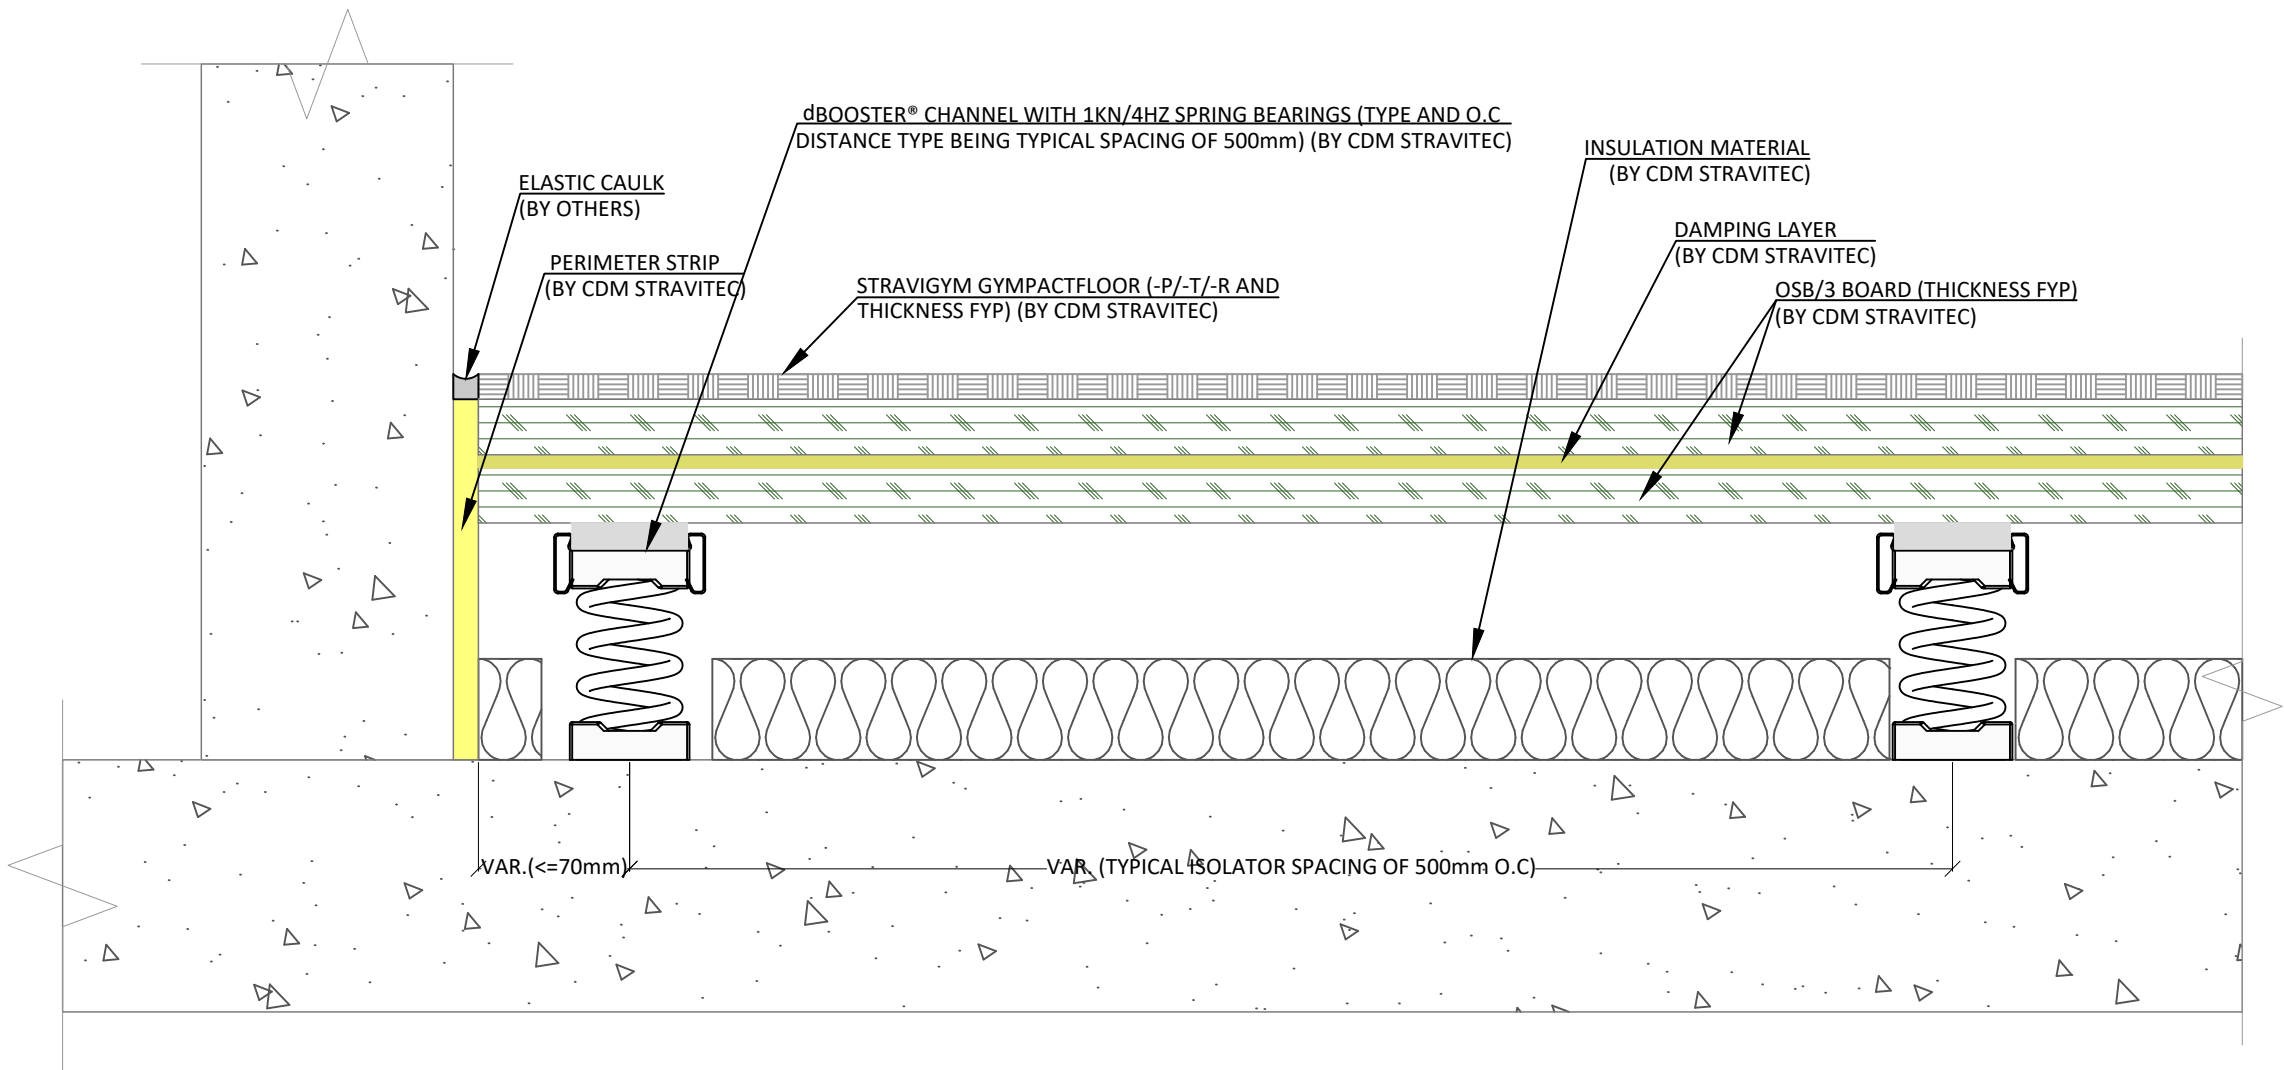

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 153mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

Stravigym XP Compact-spring 1kN/4Hz-dB(with Gympactfloor)

Typical Cross Sections - Stravigym Compact XP (EU)-05

Drawn: VPR 21/08/2026

Design: _____


Check: _____

GGU

Scale: 1 : 3

Format: A3

Page 05 of 16

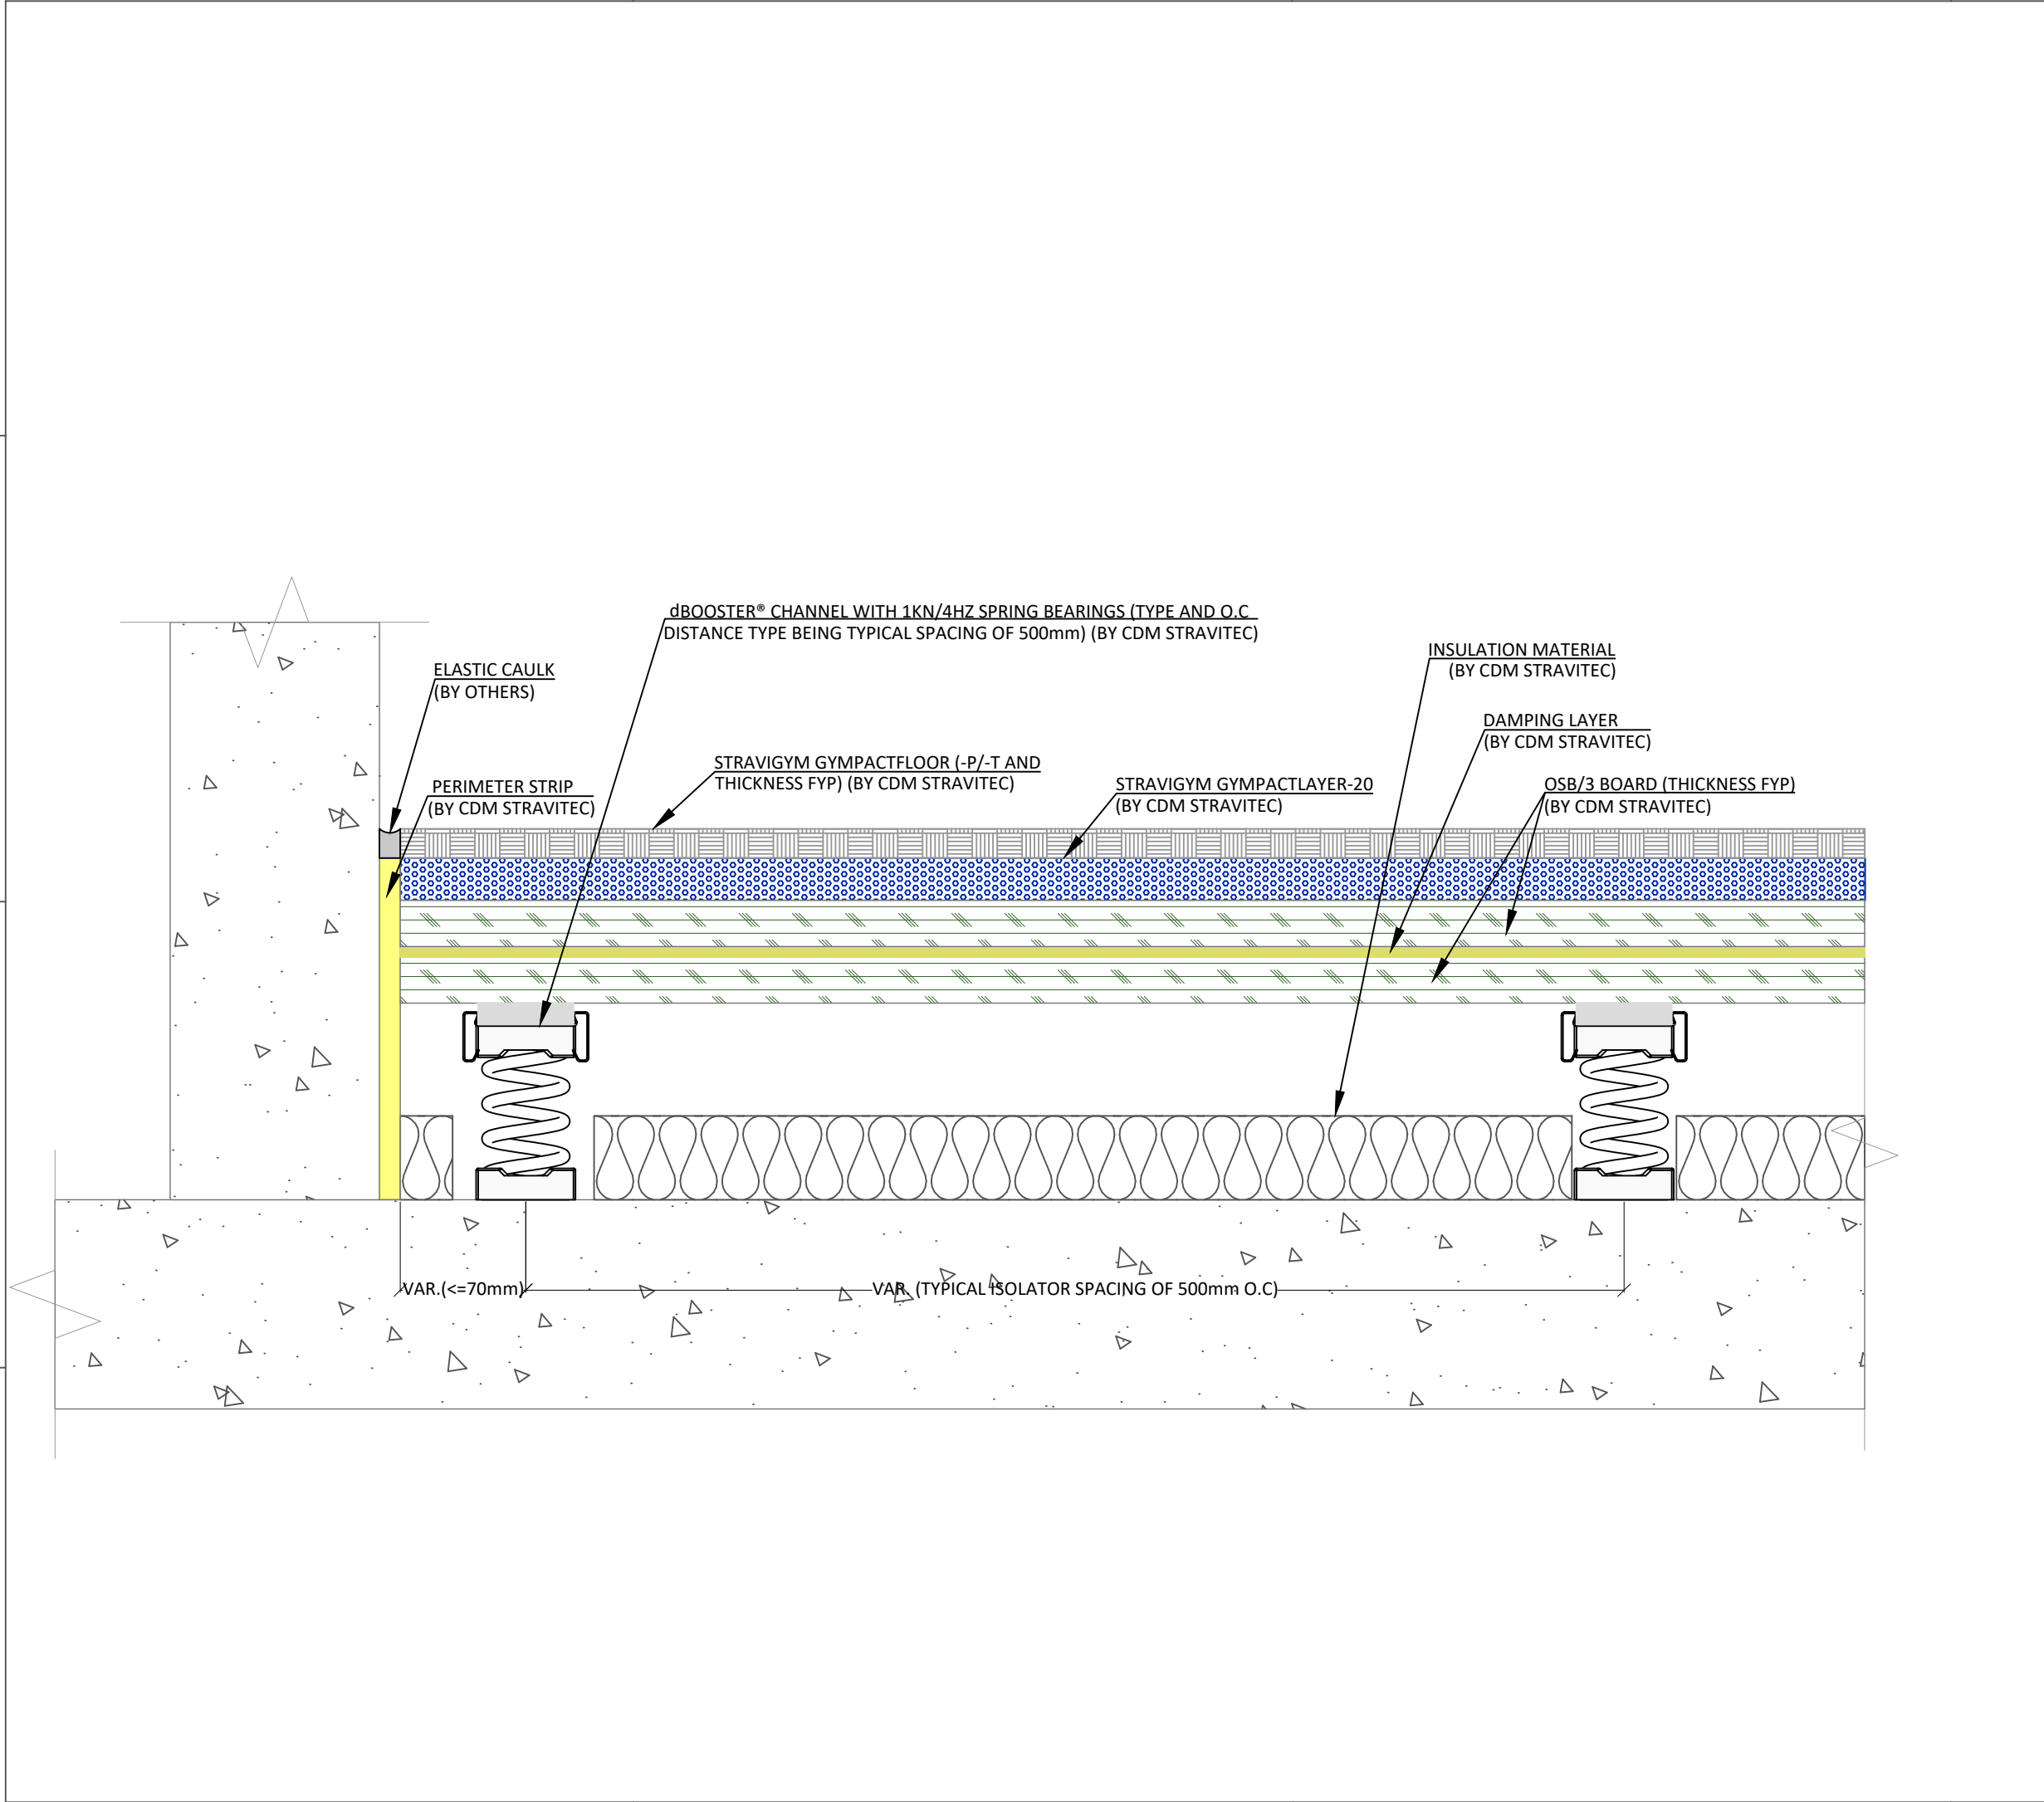

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 177mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

Stravigym XP Compact-S20-spring 1kN/4Hz-dB (with Gympactfloor)

Typical Cross Sections - Stravigym Compact XP (EU)-06

Drawn: VPR 21/08/2026

Design: -----

Check: -----


GGU

Scale: 1 : 3

Format: A3



Page 06 of 16

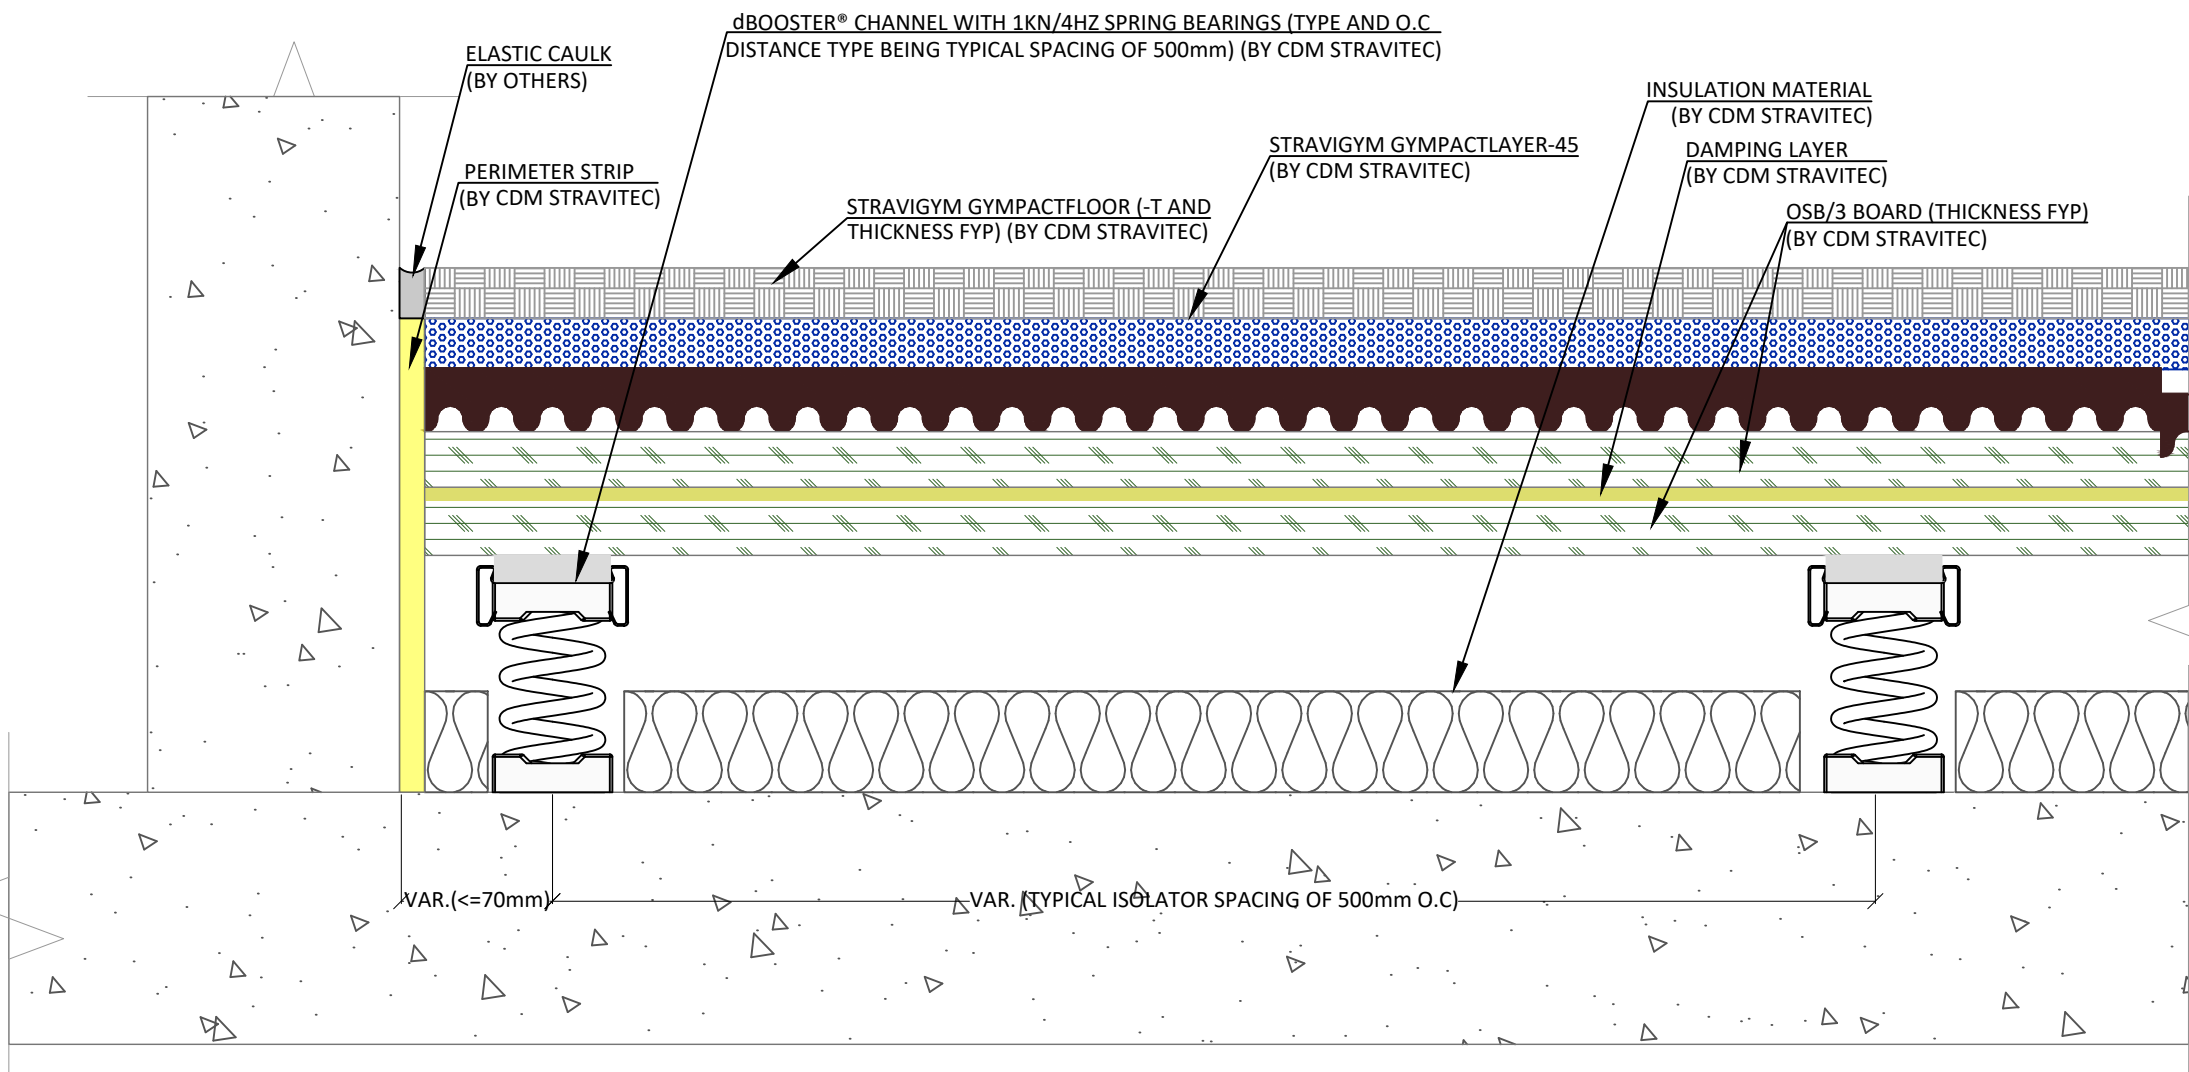

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 208mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com


This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

Stravigym XP Compact-D45-spring 1kN/4Hz-dB (with Gypactfloor)

Typical Cross Sections - Stravigym Compact XP (EU)-07

Drawn:	21/08/2026	Scale:	1 : 3
Design:		Format:	A3
Check:			
GGU			

Page 07 of 16

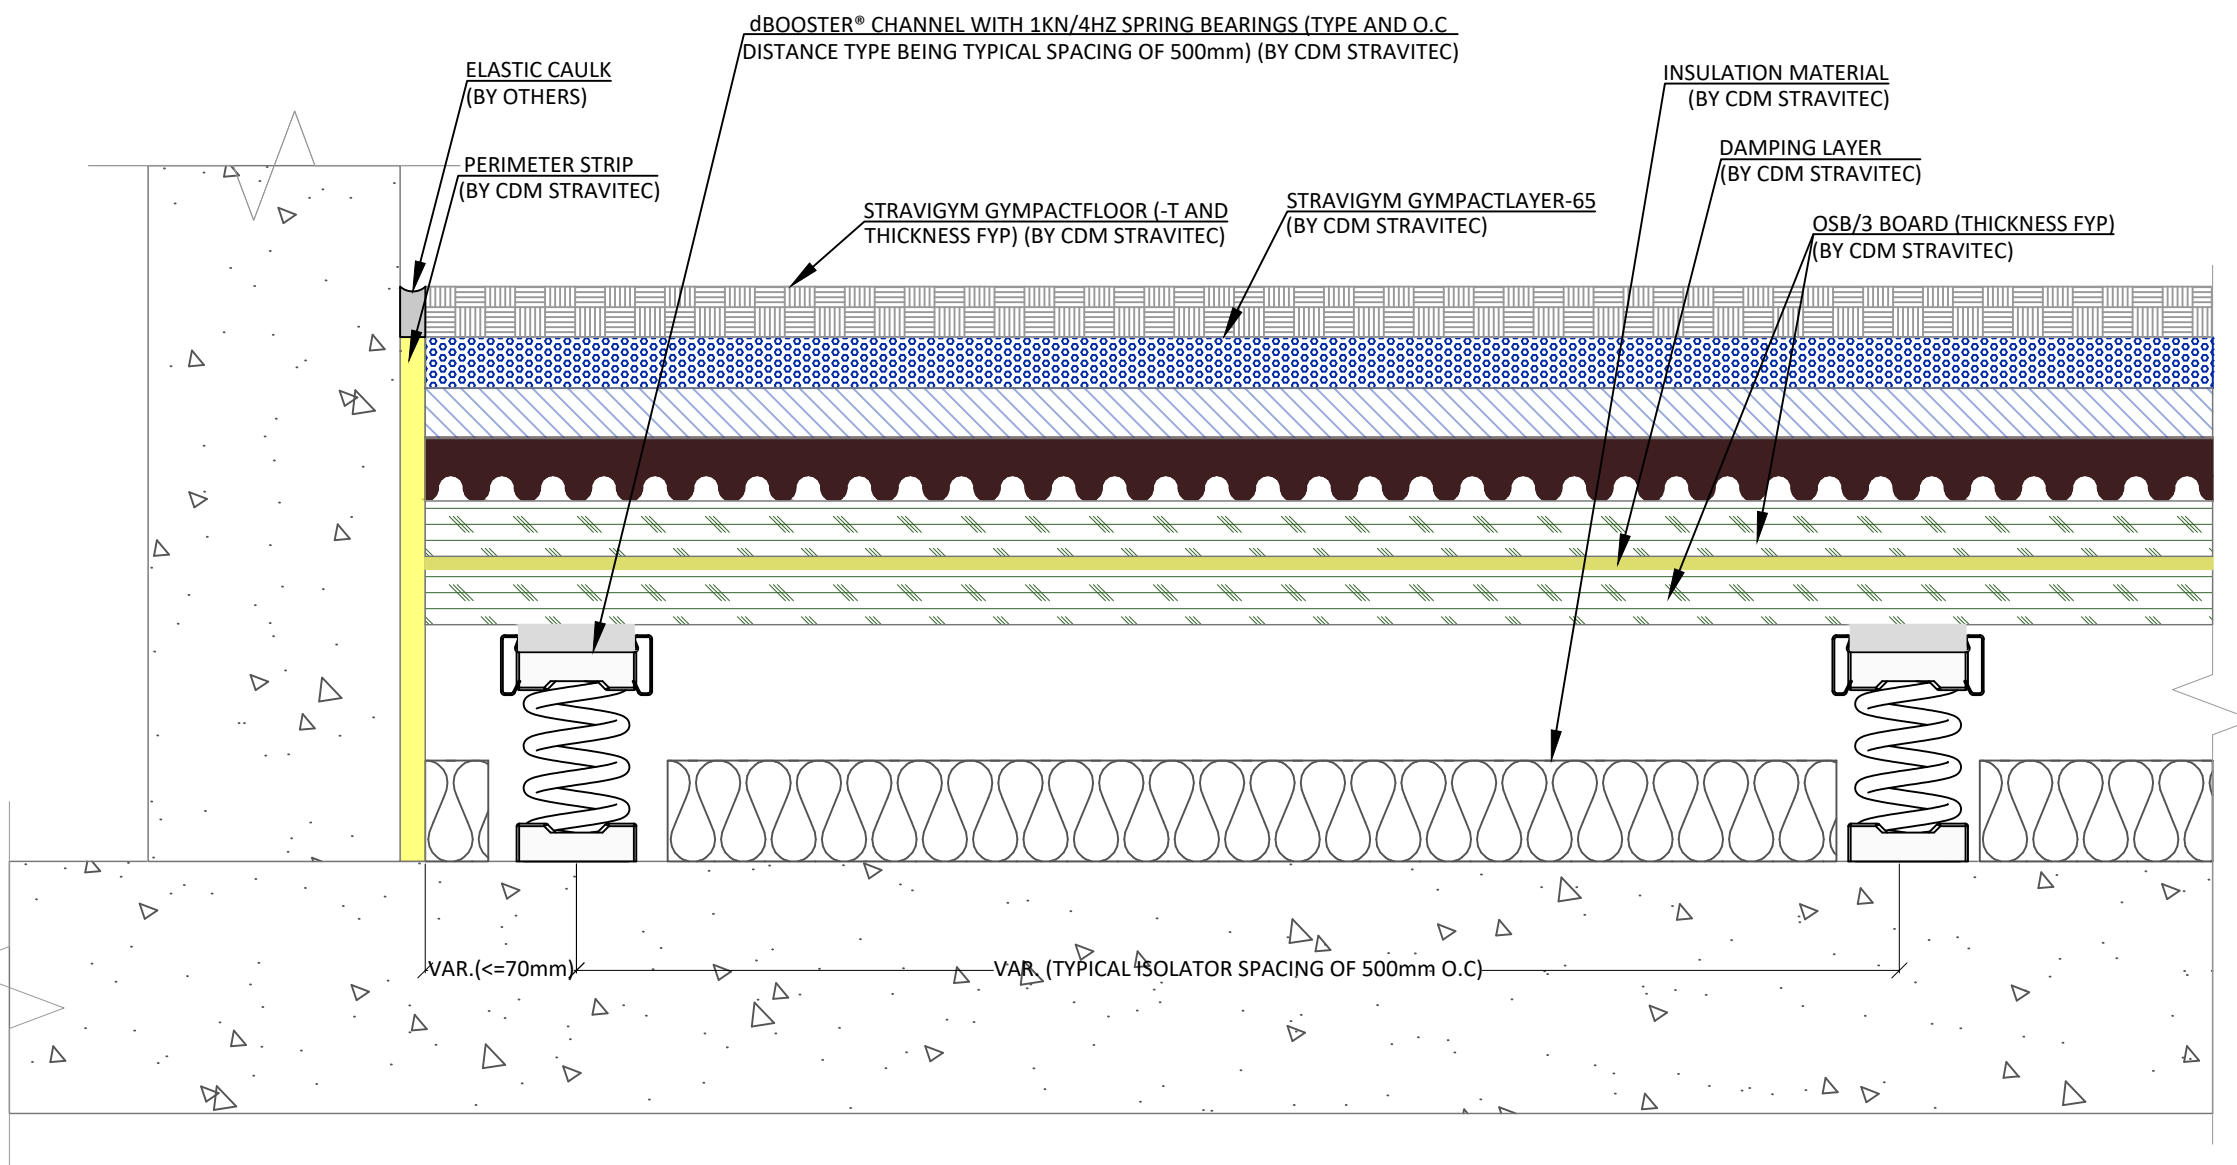

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 231mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com


This drawing is exclusive property of CDM Stravitec, any reproduction or communication to third parties without prior authorisation is prohibited.

Stravigym XP Compact-T65-spring 1kN/4Hz-dB (with Gympactfloor)

Typical Cross Sections - Stravigym Compact XP (EU)-08

Drawn:	VPR	21/08/2026	Scale:	1 : 3
Design:			Format:	A3
Check:				
GGU				

Page 08 of 16

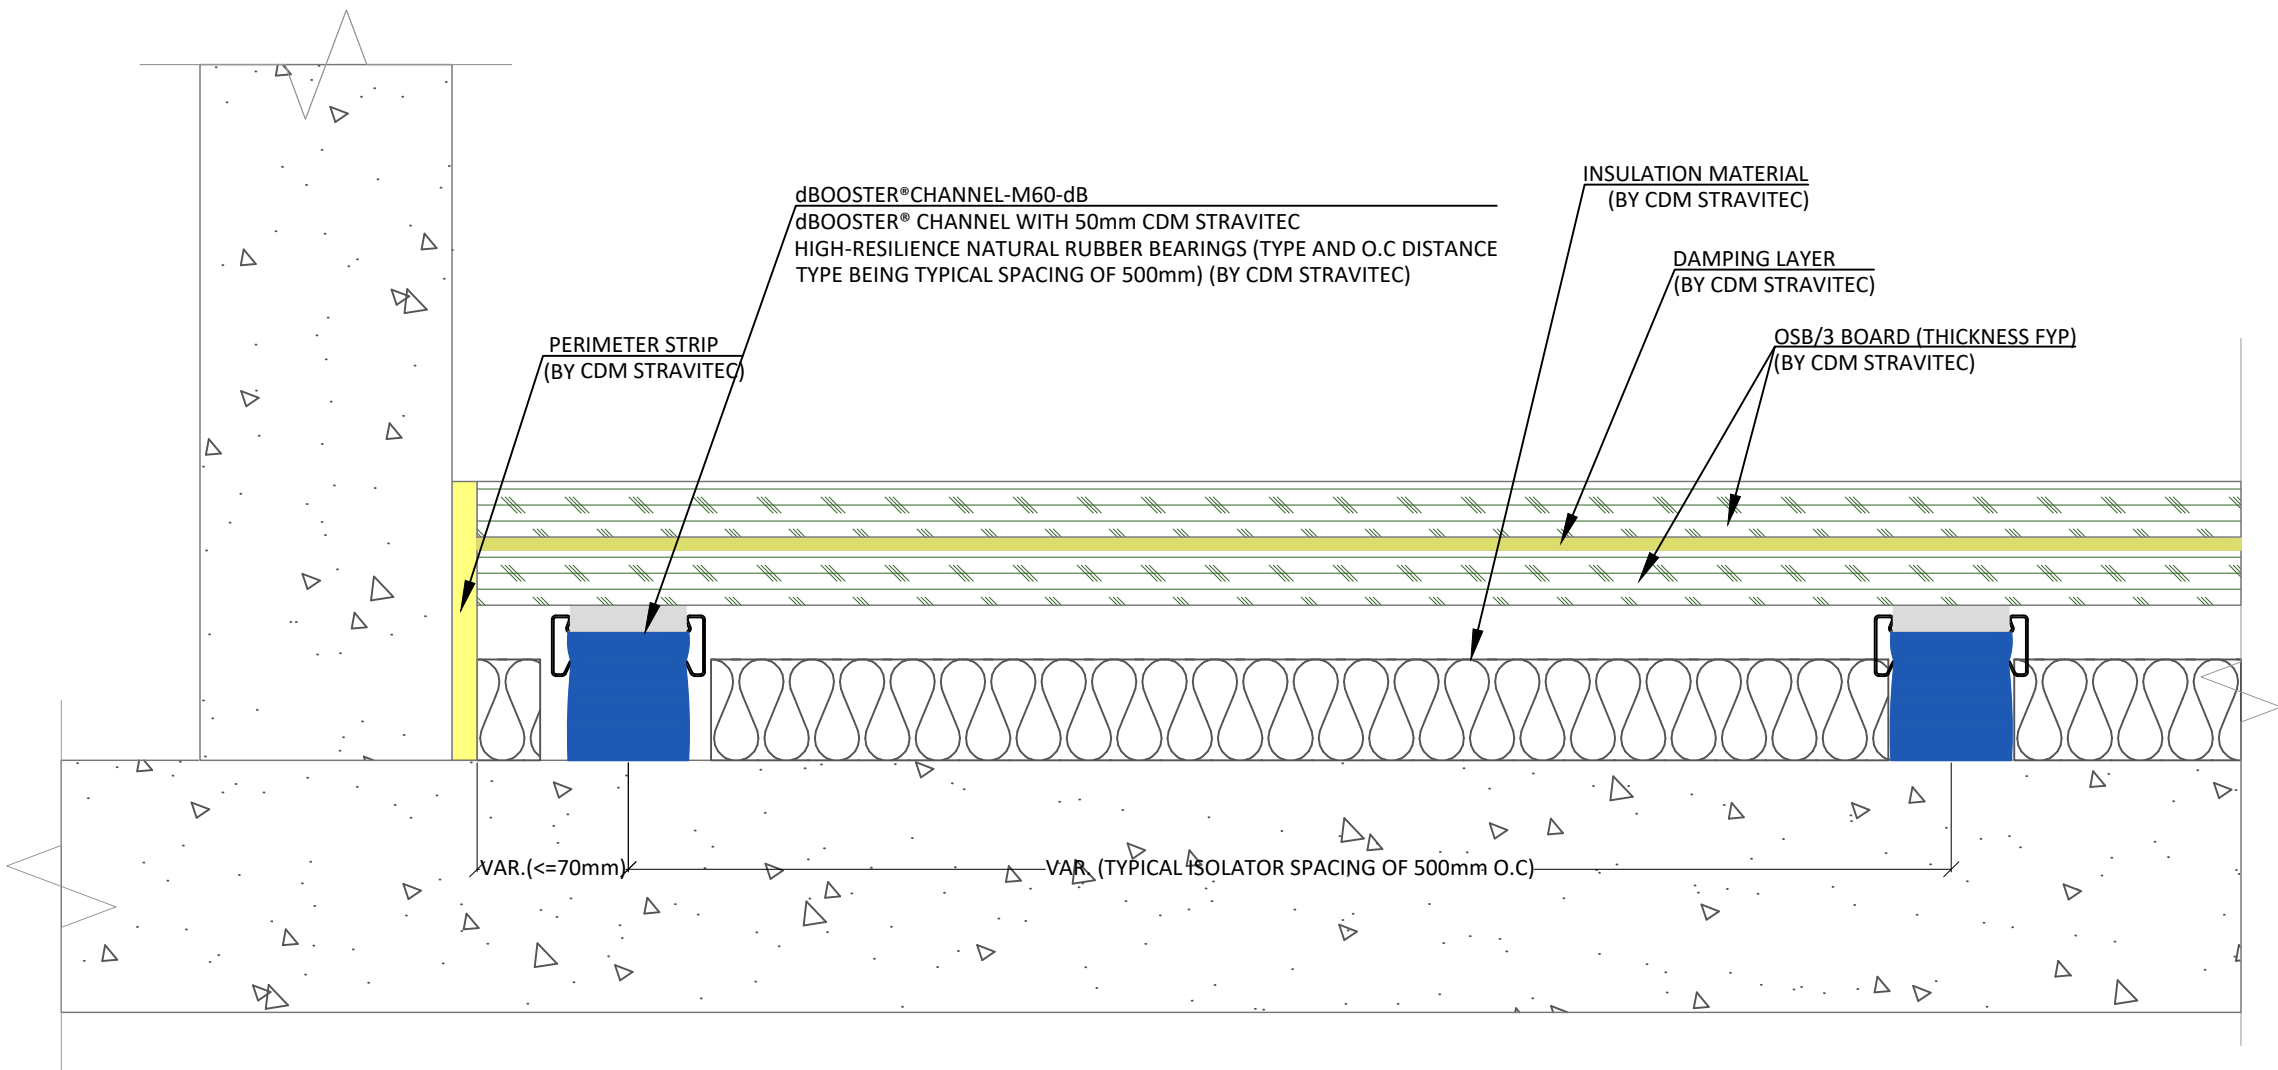

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 111mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

Stravigym XP Compact-M60-dB

Typical Cross Sections - Stravigym Compact XP (EU)-09

Drawn: VPR 21/08/2026


Design: _____

Check: _____

GGU

Scale: 1 : 3

Format: A3

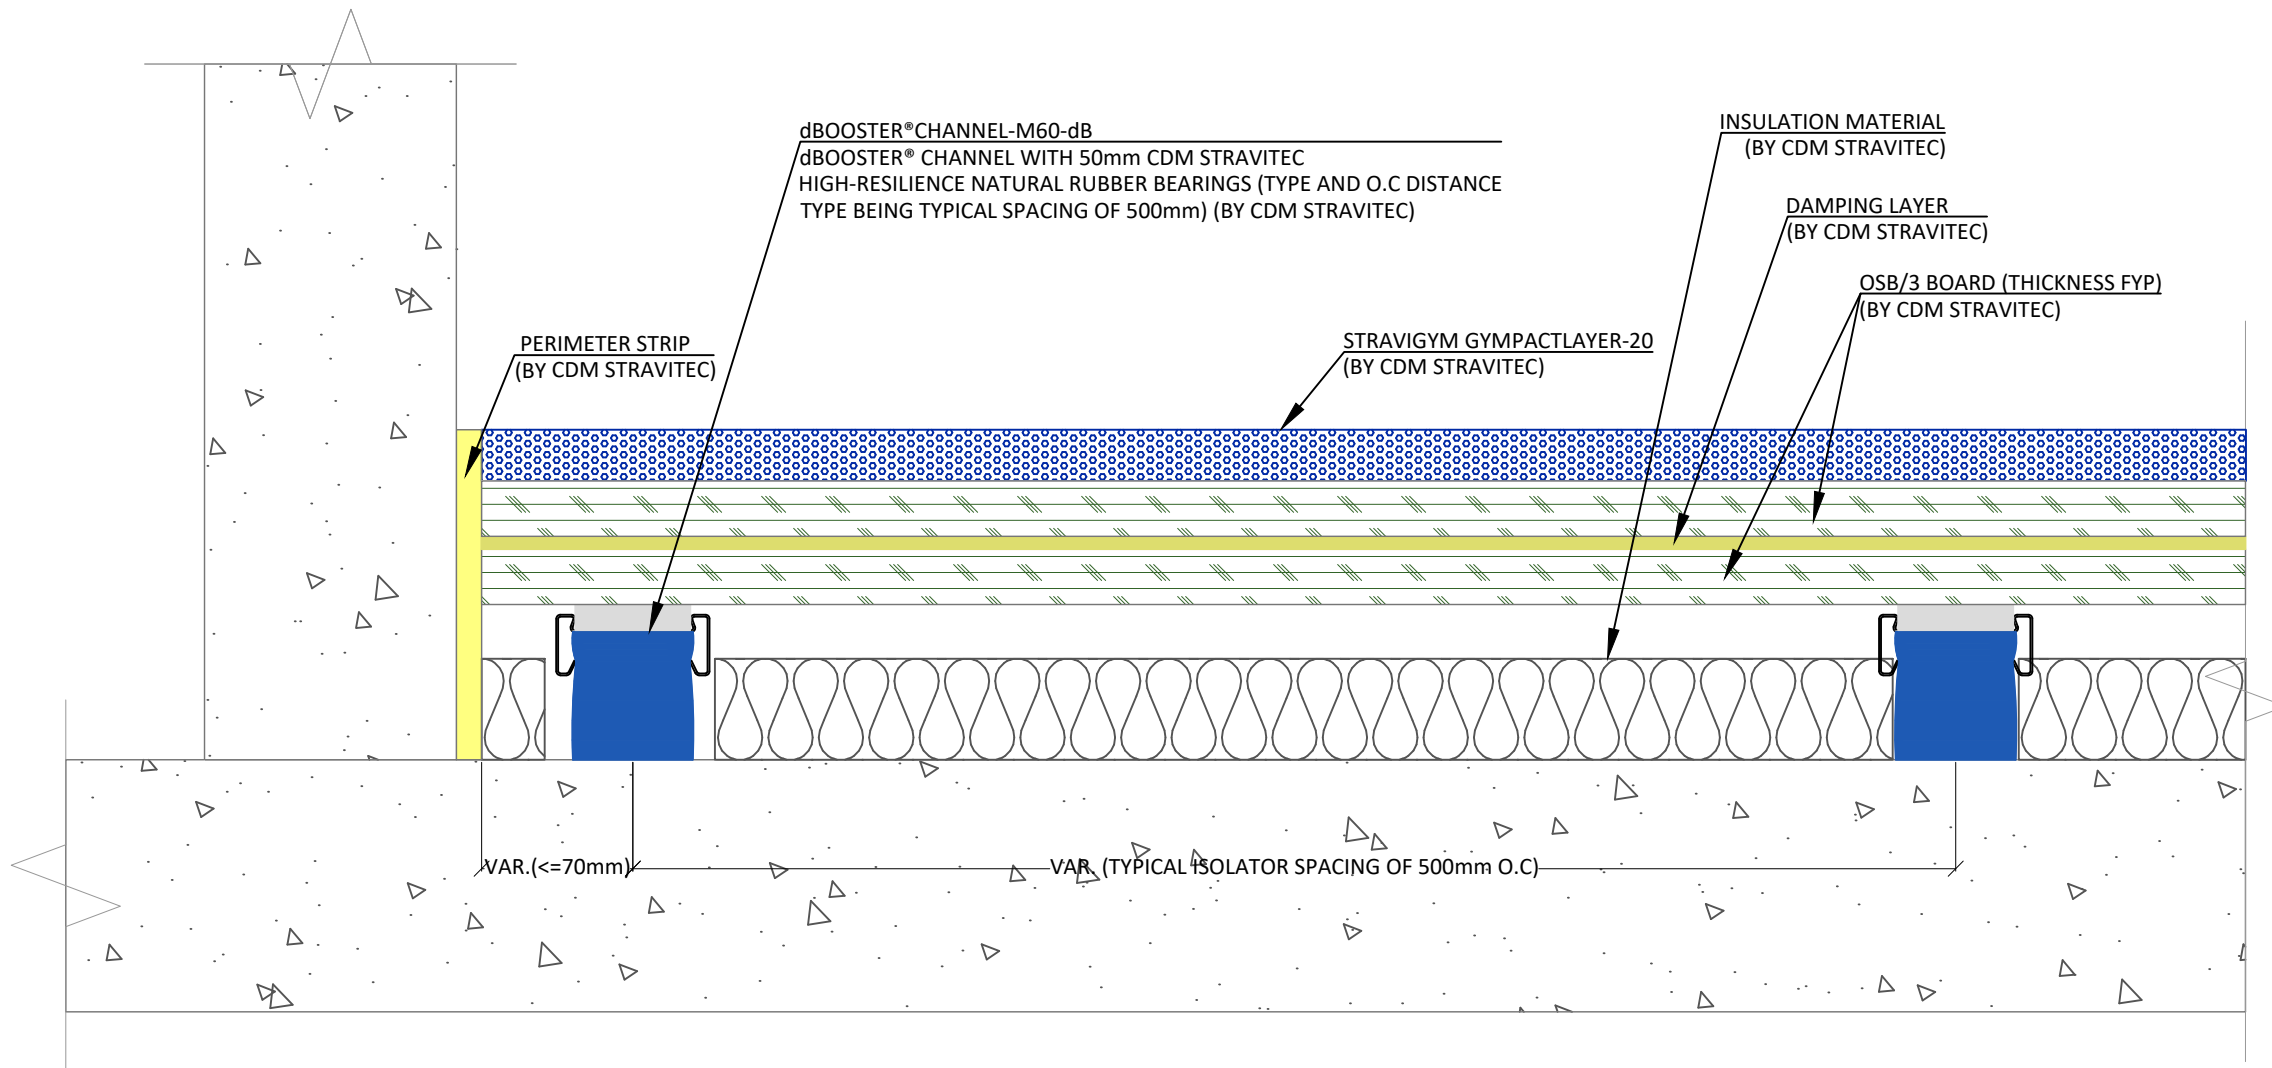

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 131mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

Stravigym XP Compact-S20-M60-dB

Typical Cross Sections - Stravigym Compact XP (EU)-10

Drawn: VPR 21/08/2026


Design: _____

Check: _____

GGU

Scale: 1 : 3

Format: A3

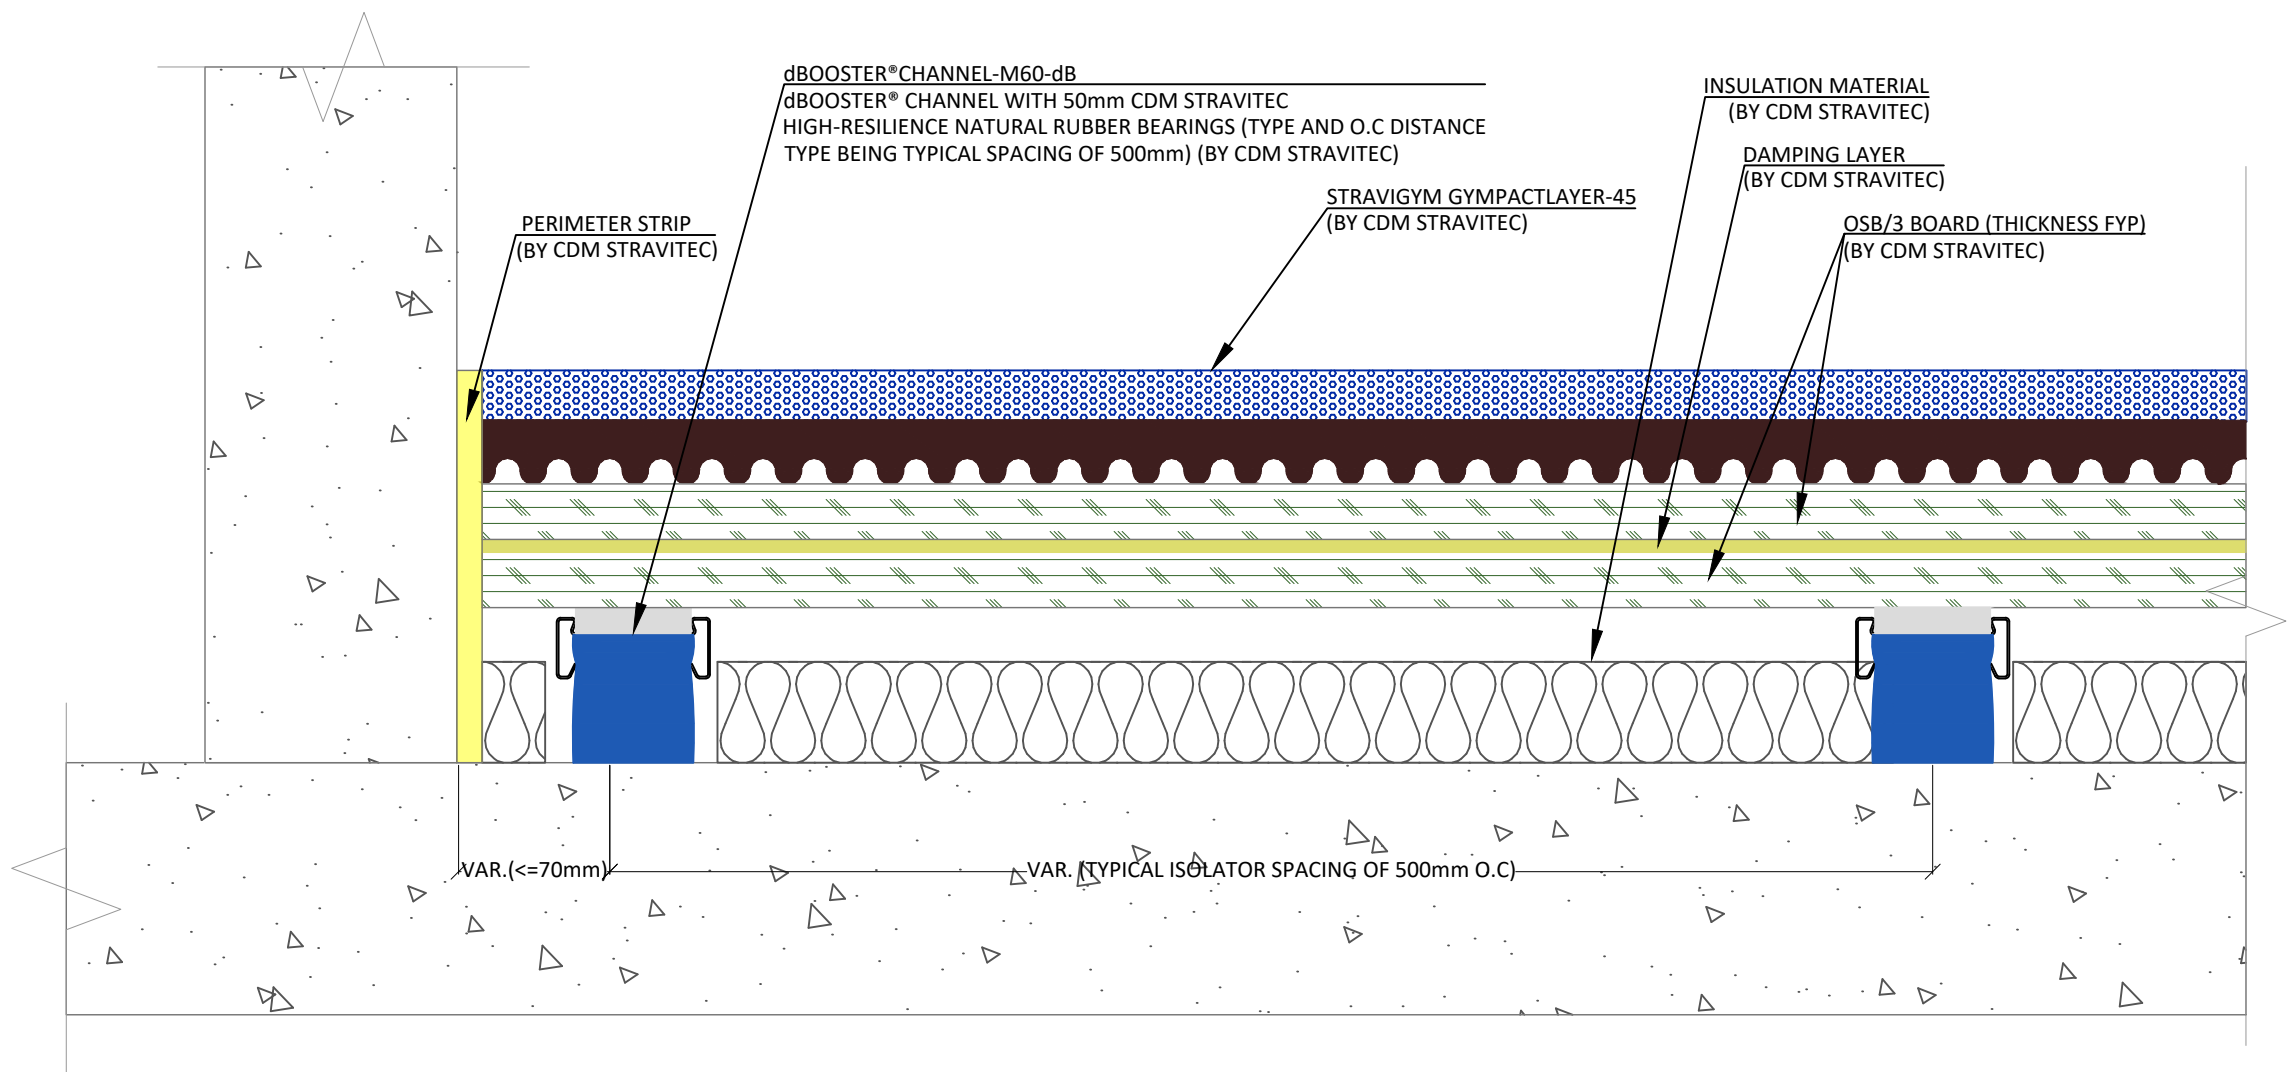

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 155mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on

cdm **stravitec**

Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

Stravigym XP Compact-D45-M60-dB

Typical Cross Sections - Stravigym Compact XP (EU)-11

Drawn: VPR 21/08/2026


Design: _____

Check: _____

GGU

Scale: 1 : 3

Format: A3

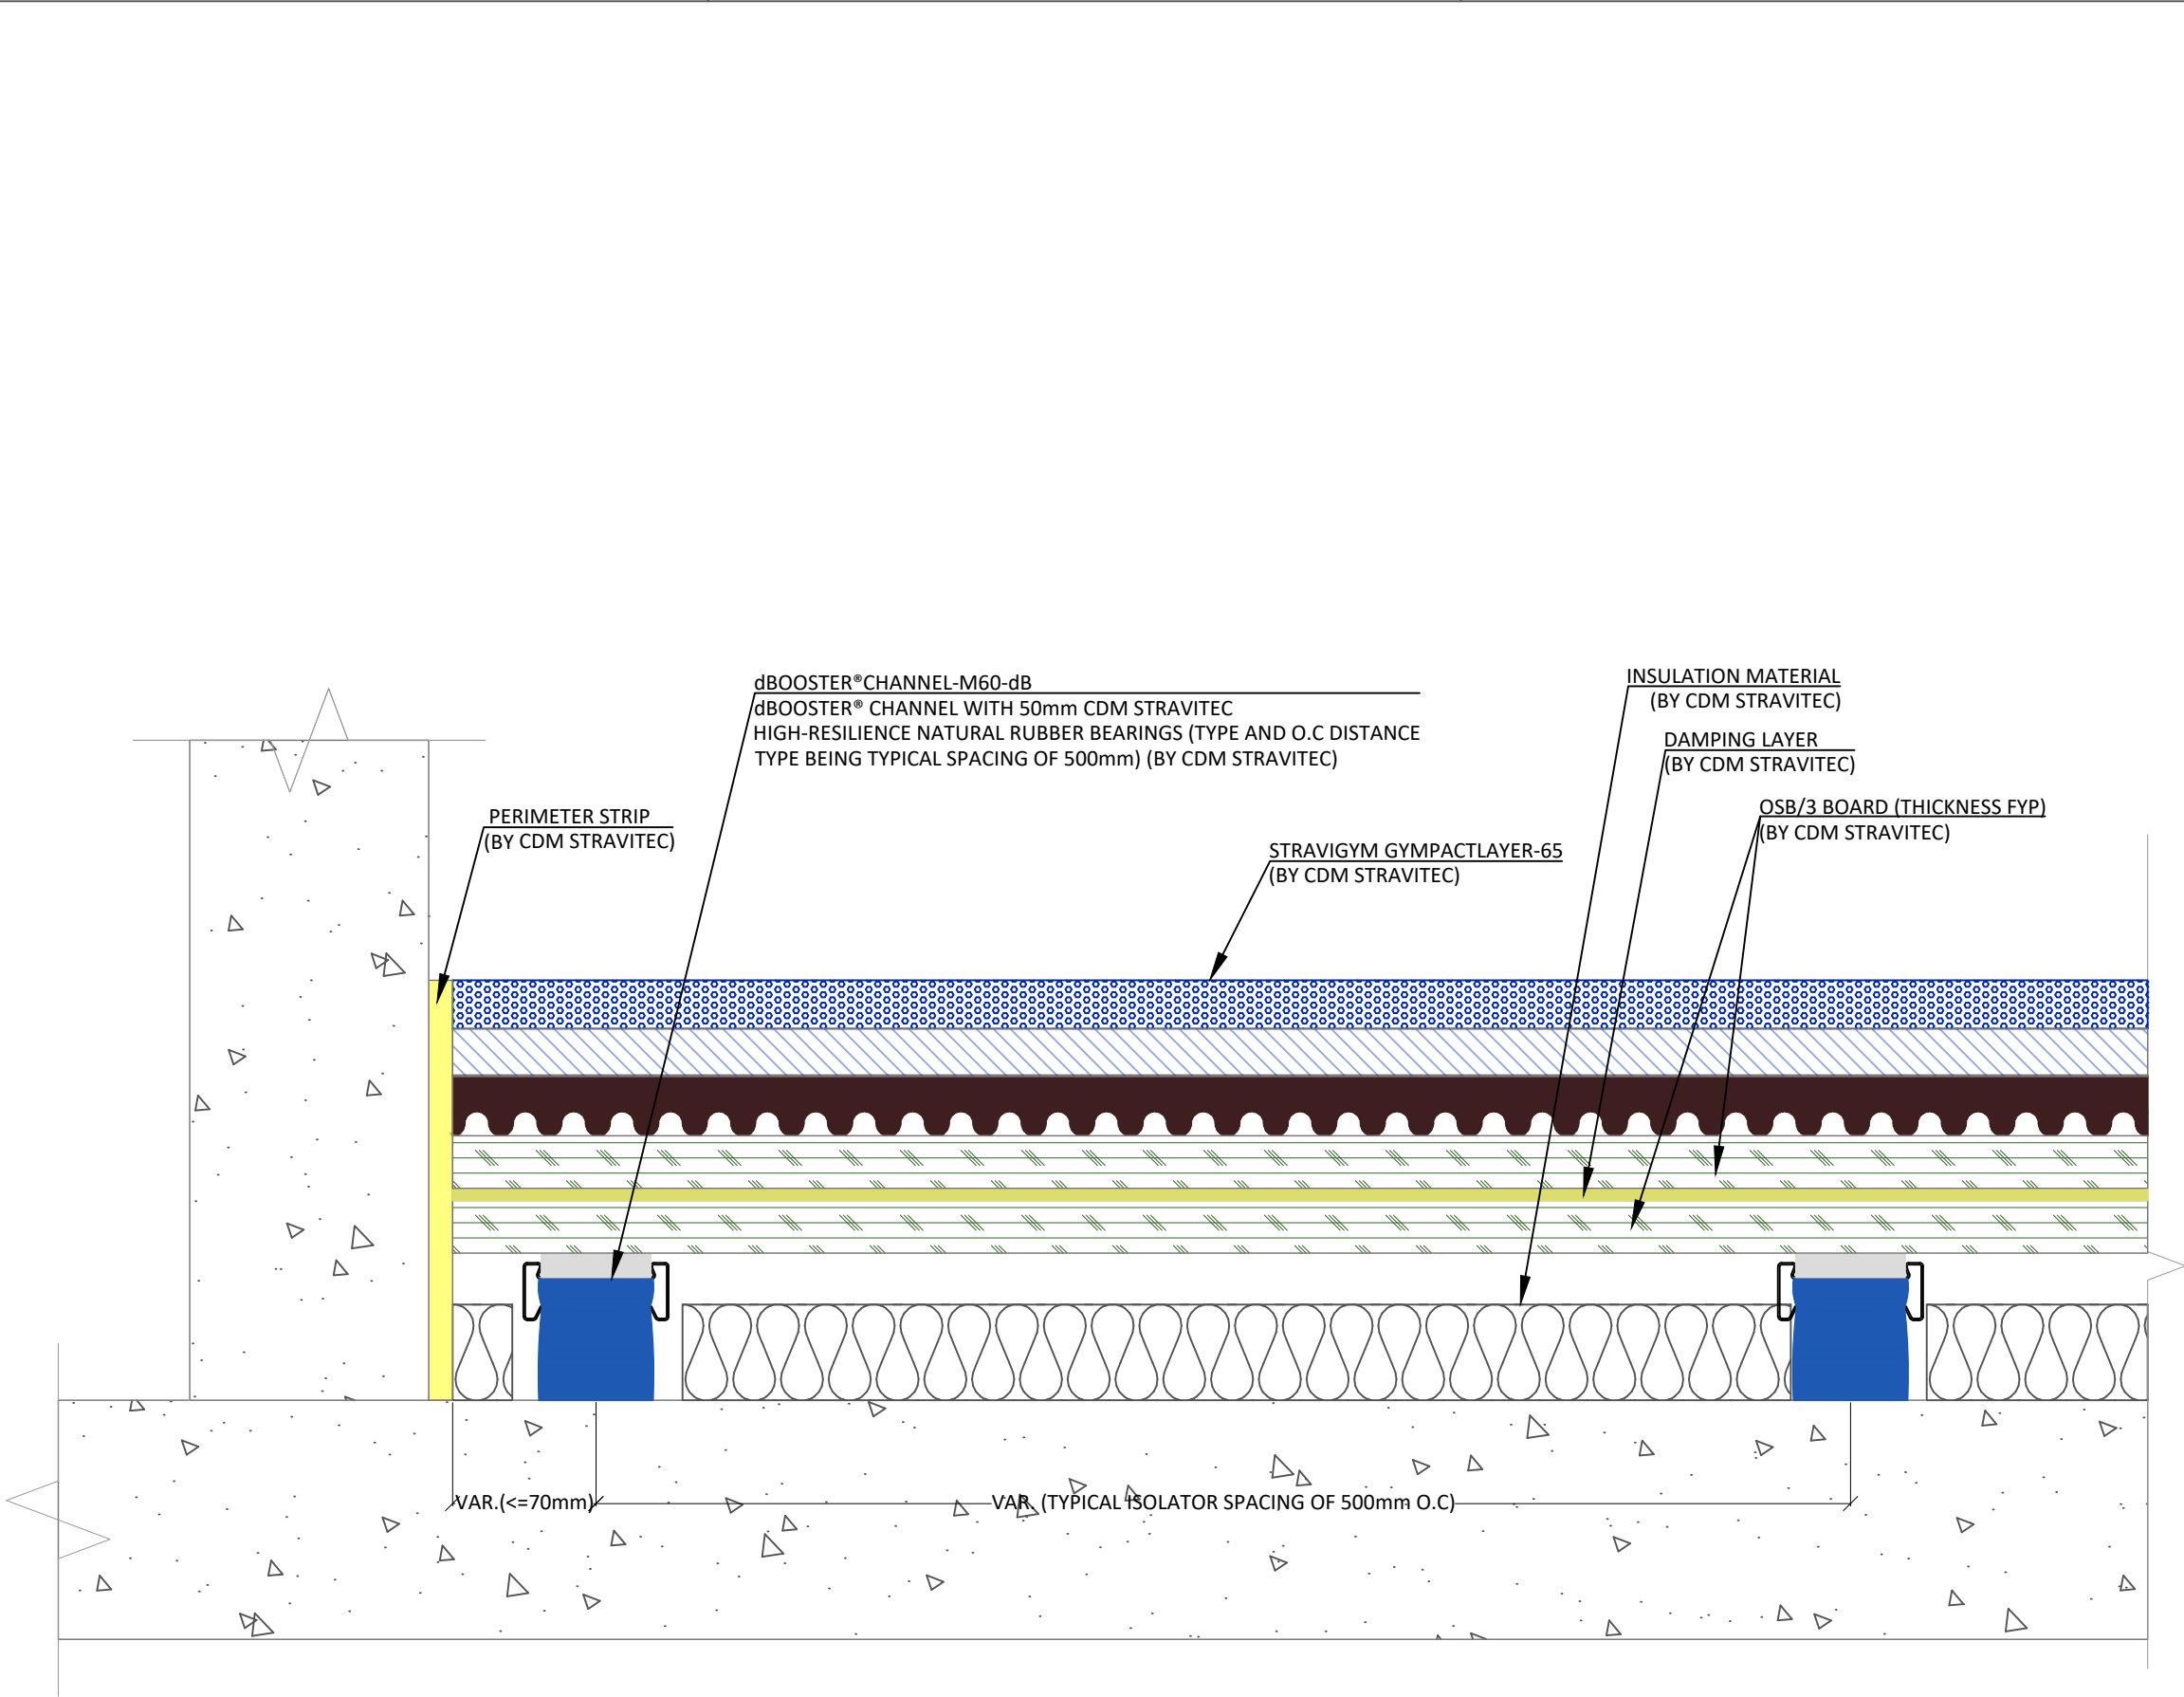

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 176mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on

cdm **stravitec**

Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

Stravigym XP Compact-T65-M60-dB

Typical Cross Sections - Stravigym Compact XP (EU)-12

Drawn: VPR 21/08/2026


Design: _____

Check: _____

GGU

Scale: 1 : 3

Format: A3

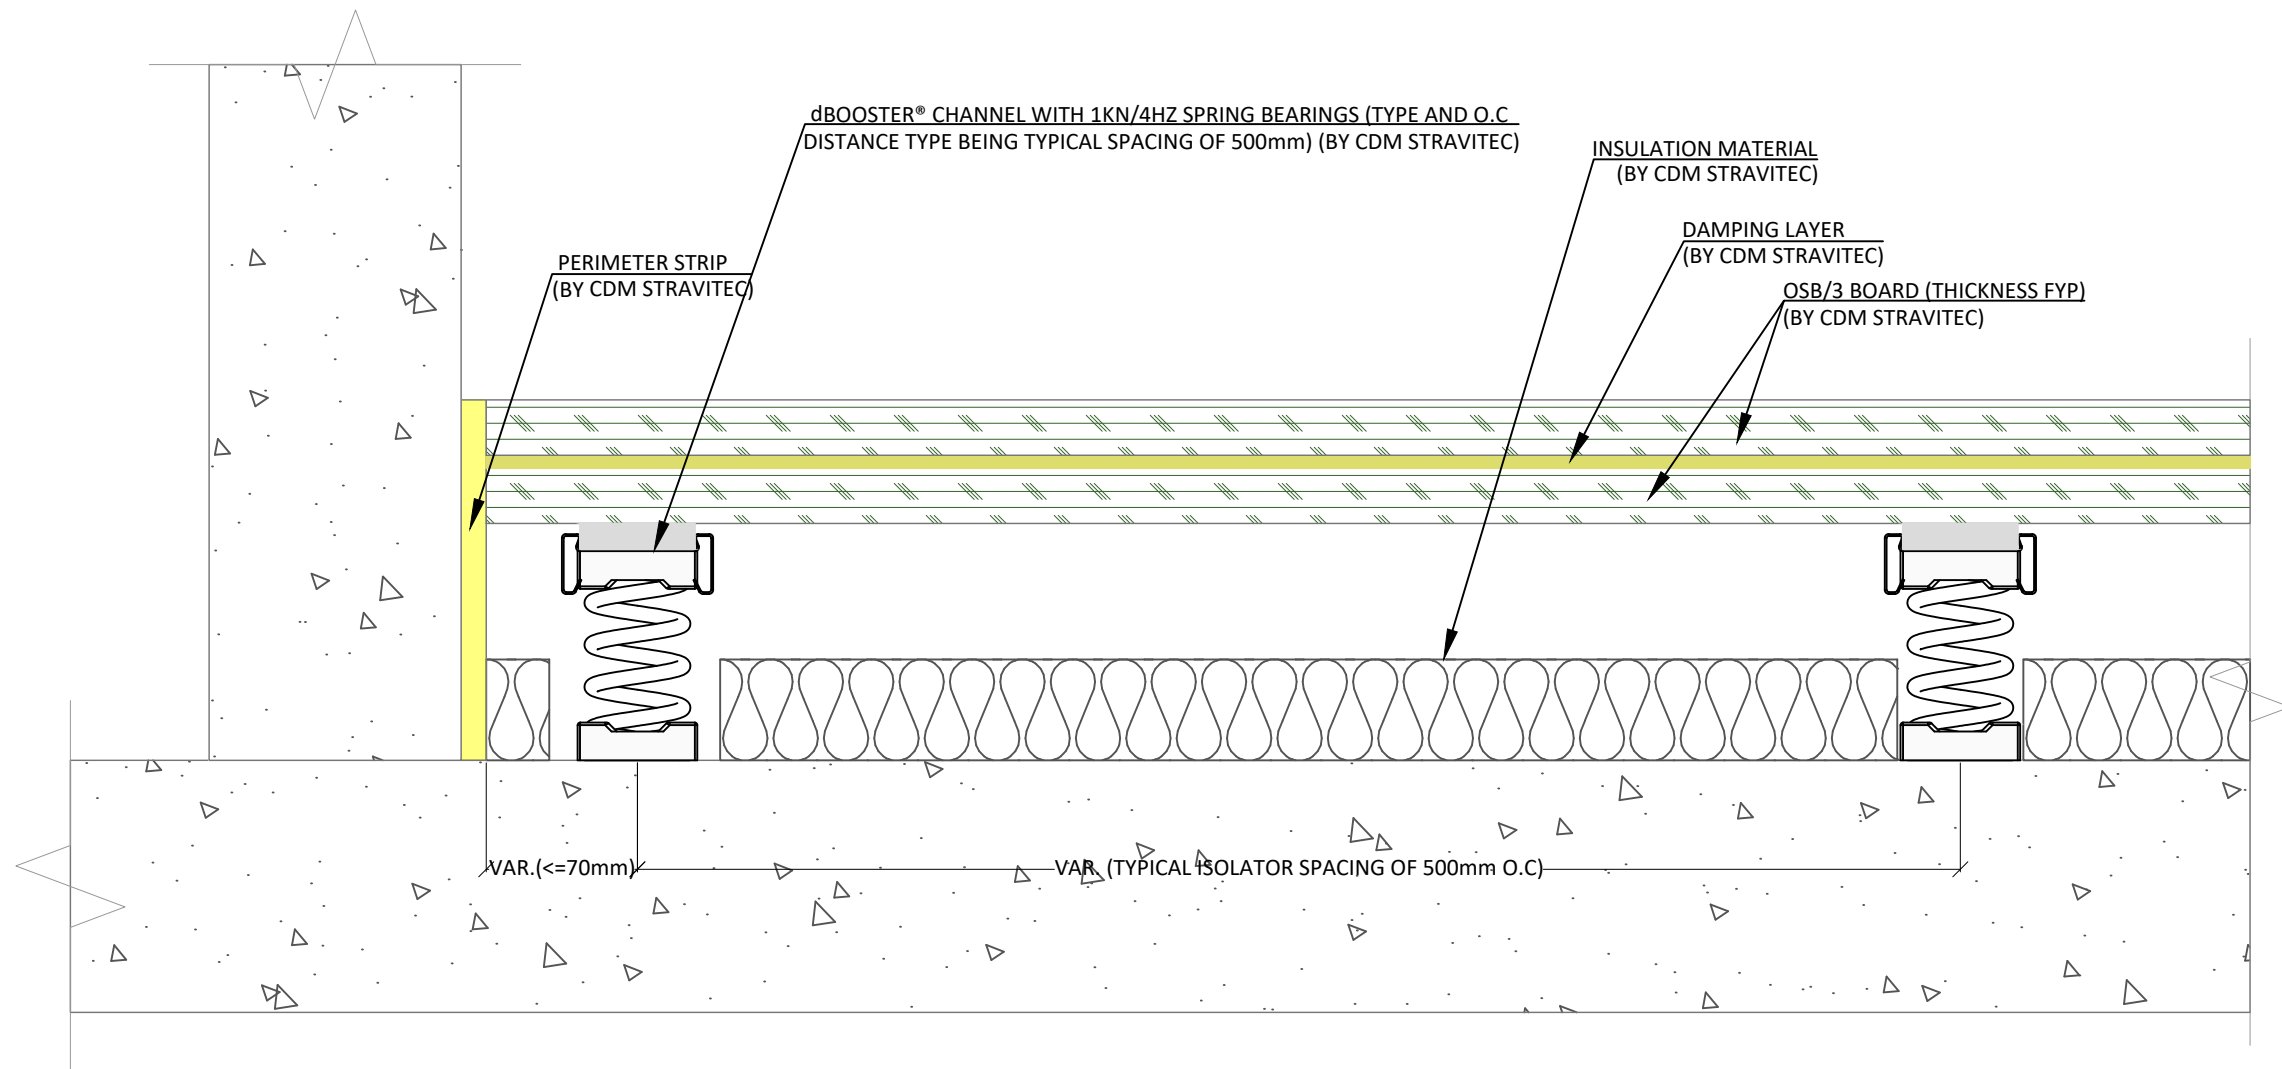

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT
(BEFORE DEFLECTION): 143mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

Stravigym XP Compact-spring 1kN/4Hz-dB

Typical Cross Sections - Stravigym Compact XP (EU)-13


Drawn:
VPR
21/08/2026

Design:

Check:
GGU

Scale:
1 : 3

Format:
A3

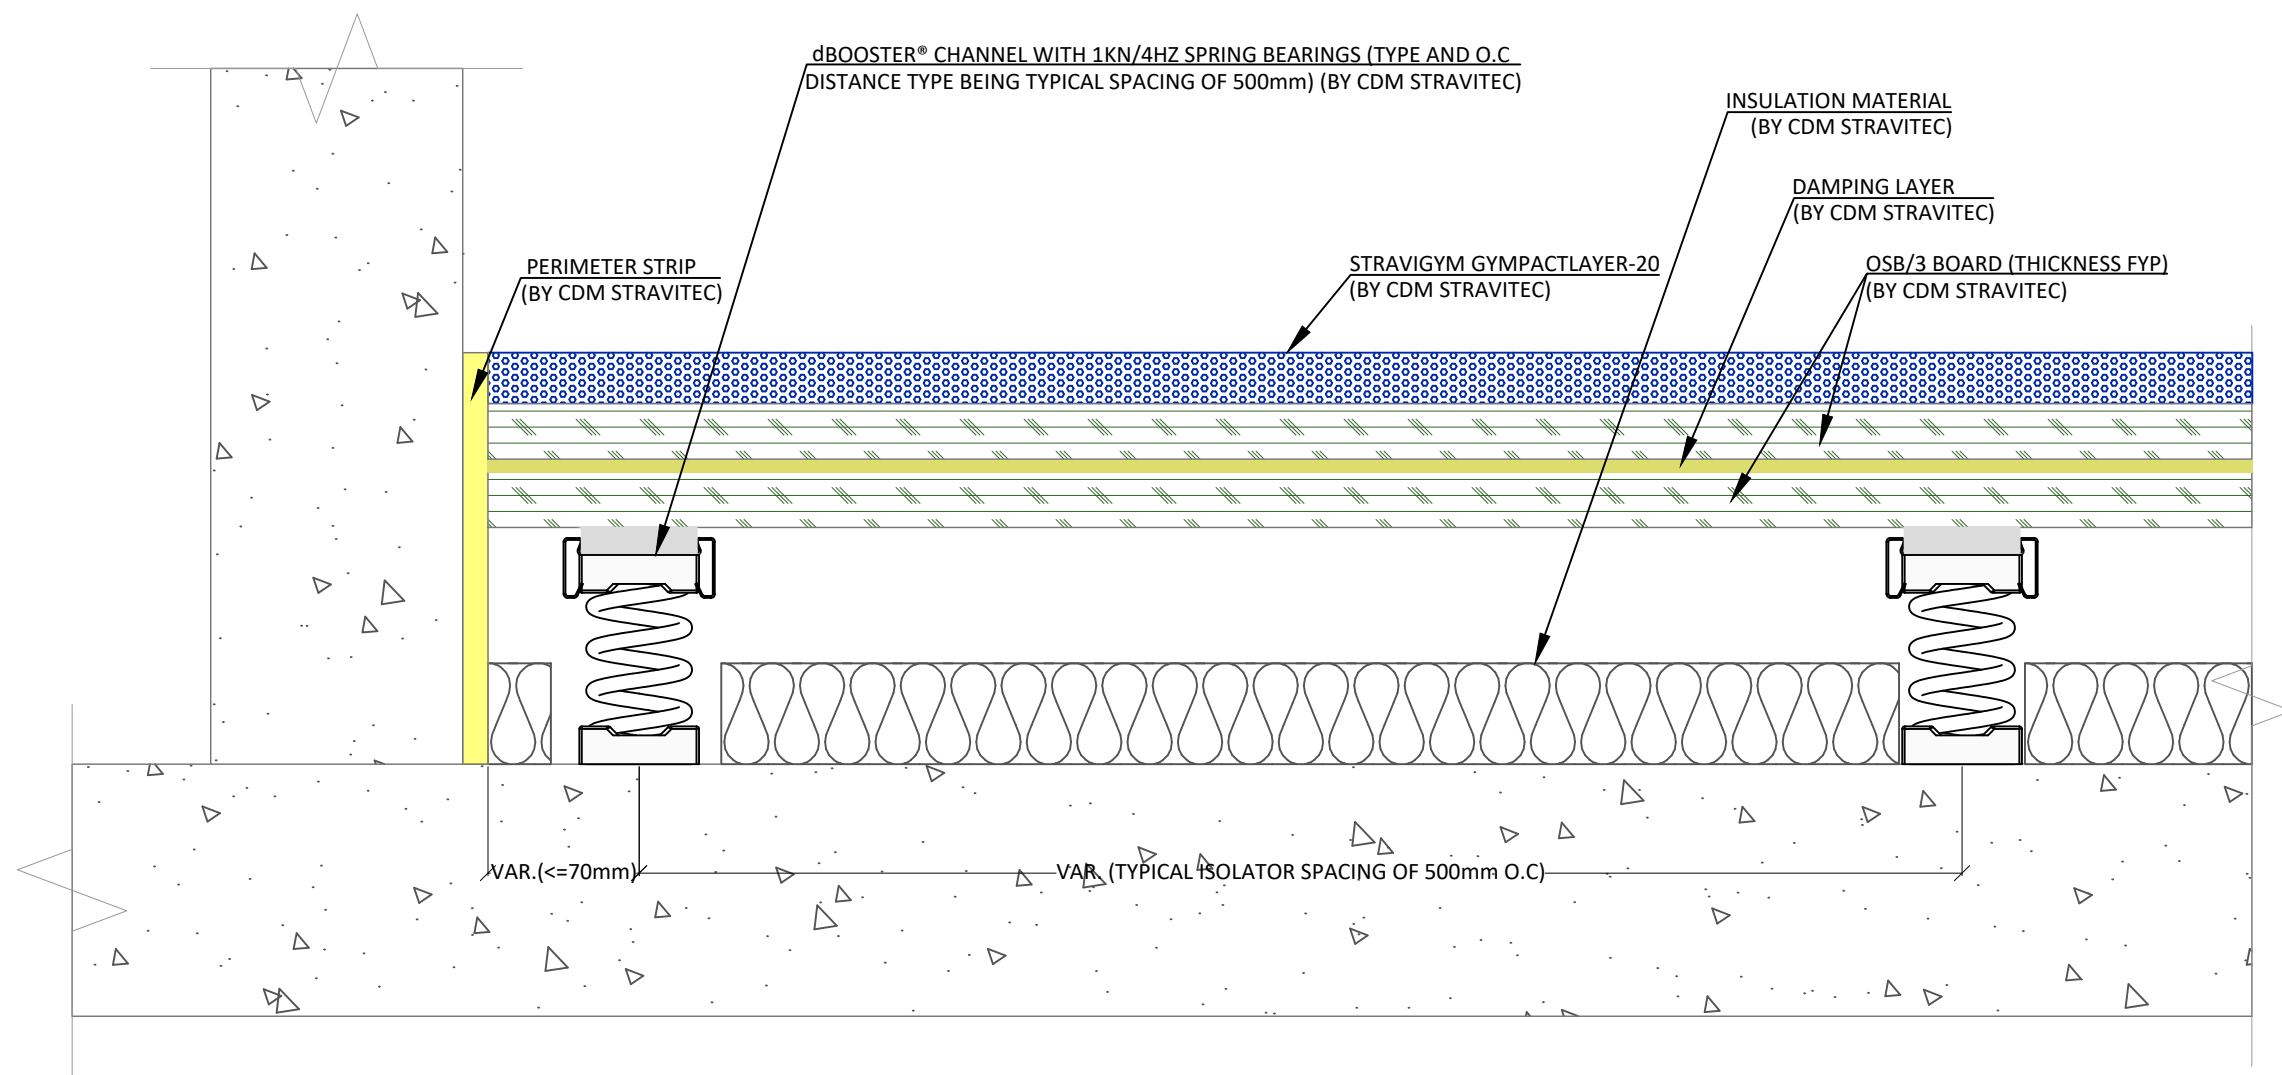

Notes	
System	Stravigym (EN)
1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc. 2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element. 3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.	
The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.	

Legend	
MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT (BEFORE DEFLECTION): 163mm	

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on

cdm

stravitec

Reutenbeek 9-11

B-3090 Overijse Belgium

PH: +32 2 687 79 07


FX: +32 2 687 35 52

info@cdm-stravitec.com

www.cdm-stravitec.com

Stravigym XP Compact-S20-spring 1kN/4Hz-dB

Typical Cross Sections - Stravigym Compact XP (EU)-14		Scale:
Drawn:	VPR	1 : 3
Design:	21/08/2026	Format:
Check:		A3
GGU		

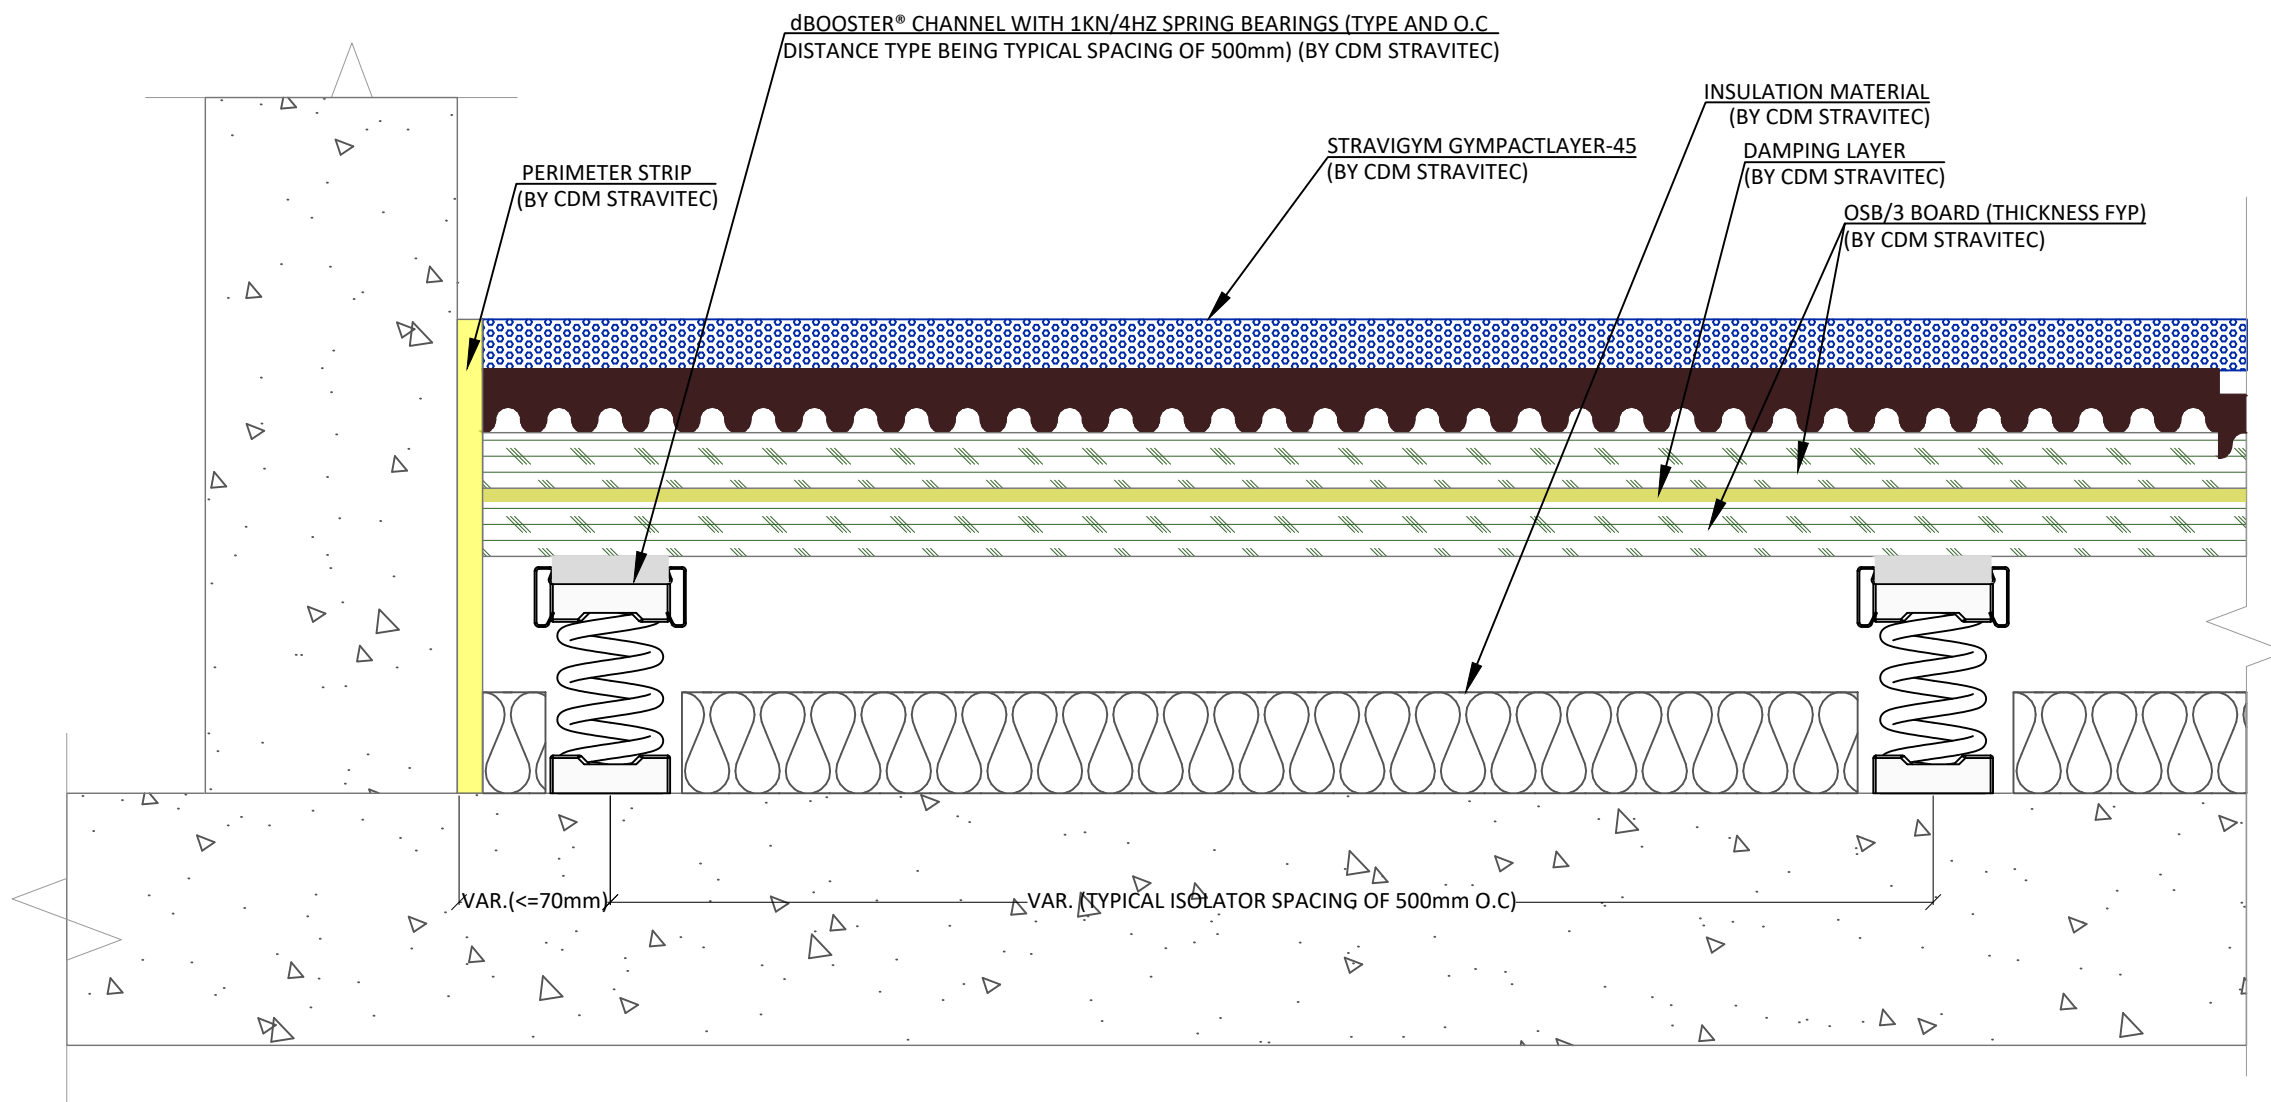

Notes

System Stravigym (EN)

1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc.

2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element.

3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT
(BEFORE DEFLECTION): 188mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

Stravigym XP Compact-D45-spring 1kN/4Hz-dB

Typical Cross Sections - Stravigym Compact XP (EU)-15

Drawn: VPR 21/08/2026


Design: _____

Check: _____

GGU

Scale: 1 : 3

Format: A3

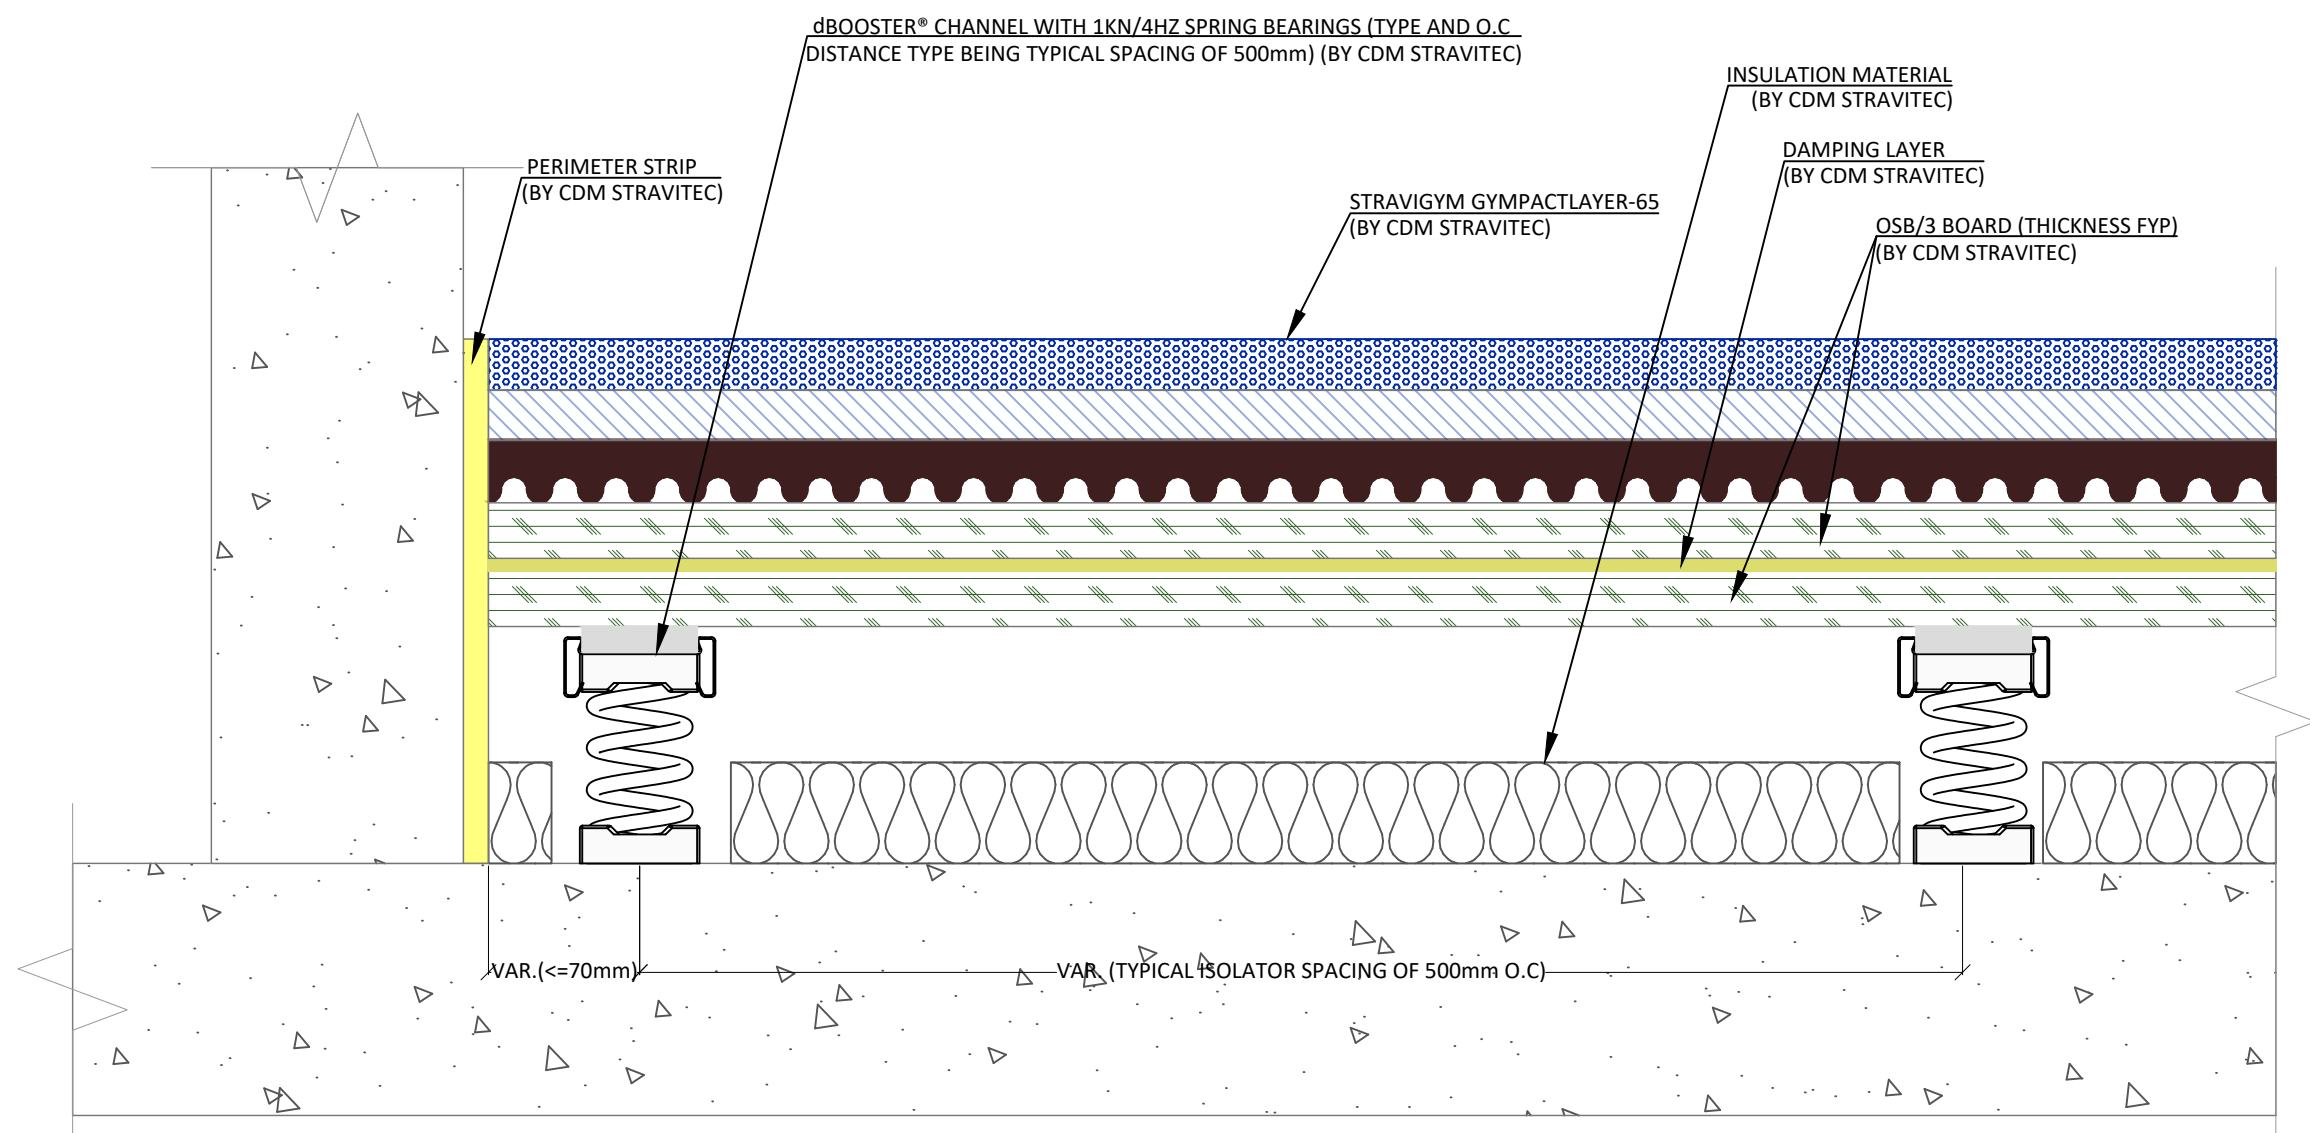

Notes	
System	Stravigym (EN)
1. The structural floor should comply with the required tolerances regarding gradient (0,1 % or 1 mm/m) and smoothness (max. 2 mm). It should be dry and free of obstacles, discontinuities, dust, etc. 2. A rigid connection should be avoided between the floating slab and all vertical elements (as walls, columns, ...) by adding a void or a layer of lateral isolation between the isolated slab and the vertical element. 3. The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.	
The Stravigym solution is suitable for applications that experience a defined maximum impact energy. For more detailed information refer to the related Stravigym solution datasheet.	

Legend

MINIMUM SYSTEM TOTAL BUILD-UP HEIGHT
(BEFORE DEFLECTION): 208mm

Second submission	21/08/2026	VPR	B
First submission	15/04/2026	LCH	A
Revision Description	Date	Drawn	Rev.

Load table

Drawing based on



Reutenbeek 9-11
B-3090 Overijse Belgium
PH: +32 2 687 79 07
FX: +32 2 687 35 52
info@cdm-stravitec.com
www.cdm-stravitec.com

Stravigym XP Compact-T65-spring 1kN/4Hz-dB

Typical Cross Sections - Stravigym Compact XP (EU)-16		Scale:
Drawn:	21/08/2026	1 : 3
Design:		Format:
----		A3
Check:		
GGU		