




Scan here for access to
solution website page
for other documents

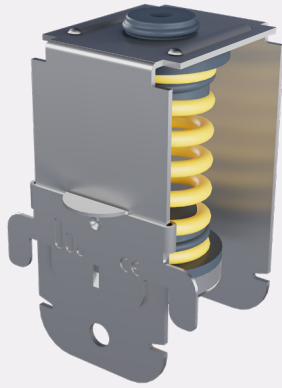

Stravilink CC40-S


Datasheet

Stravilink CC40-S is a Channel Clip using Springs, designed for suspending acoustic ceilings with 47 mm steel ceiling channels and optimising sound insulation between vertically arranged rooms.



FEATURES

- Suitable for installation on various structures, including concrete and cross-laminated timber (CLT) slabs
- Designed to be compatible with 47 mm galvanized steel ceiling channels
- Equipped with springs featuring a natural frequency of 4 Hz at design load
- Colour-coded spring options available, supporting loads from 4 to 59 kg
- Requires a minimum void depth of 97 mm. Variable void dept is possible
- Includes a safety clip to prevent ceiling channel deformation due to excess weight
- Elastomeric soundstop extends beyond the metal clip, preventing the rod from making contact, thereby avoiding a short circuit and direct contact with the soffit when attached directly to the ceiling
- Effortless snap-in design lets the hanger quickly and securely attach to the ceiling channel
- No specialized tools are required for installation
- Simple and fast installation process

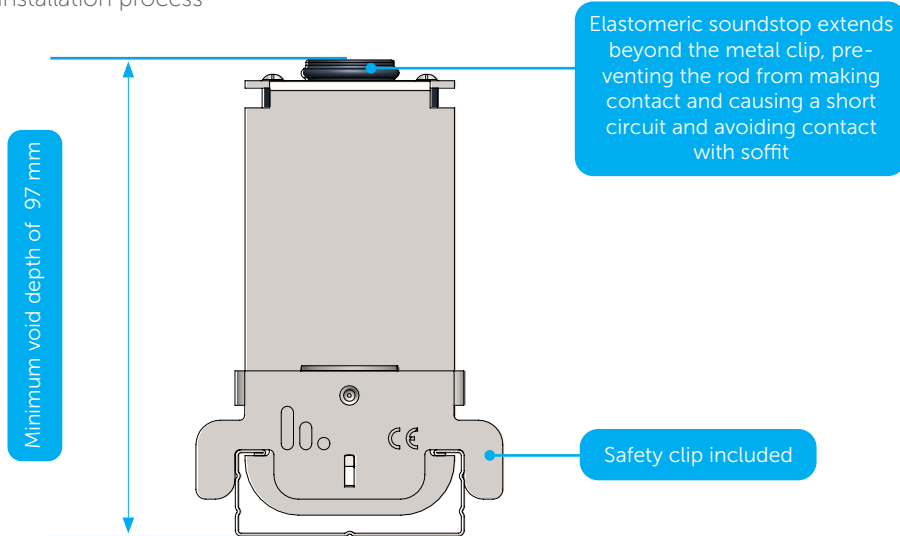

PACKAGING

Model	Reference	Quantity per Box	Weight per Box [kg]	Dimension of Box [cm]
Stravilink CC40-S75	001965	25	4.84	23 x 15 x 17.3
Stravilink CC40-S150	001966	25	5.24	23 x 15 x 17.3
Stravilink CC40-S230	001967	25	5.58	23 x 15 x 17.3
Stravilink CC40-S340	001968	25	5.90	23 x 15 x 17.3
Stravilink CC40-S455	001969	25	6.08	23 x 15 x 17.3



PHYSICAL & MECHANICAL PROPERTIES

Model	Design Load		Resonance Frequency at Design Load	Load Range (per Hanger)		Spring Colour
	kg	N		kg	N	
Stravilink CC40-S75	7.5	75	< 4	4 - 14.5	40 - 145	Light Ivory 
Stravilink CC40-S150	15	150	< 4	7.5 - 24	75 - 240	Zinc Yellow 
Stravilink CC40-S230	23	230	< 4	11.5 - 31.5	115 - 315	Sky Blue 
Stravilink CC40-S340	34	340	< 4	17 - 44	170 - 440	Silver Grey 
Stravilink CC40-S455	45.5	455	< 4	23 - 59	230 - 590	Pearl Night Blue 



Notes:

Admissible load of steel elements: 756 N.

Products are suited up to a C2 environment (atmosphere with little or no degree of pollution).

To assess which type is appropriate the following information is needed:

- 1) The weight and construction of the supported ceiling - this will determine the type of hanger;
- 2) The weights and support locations of any items hung from the ceiling.

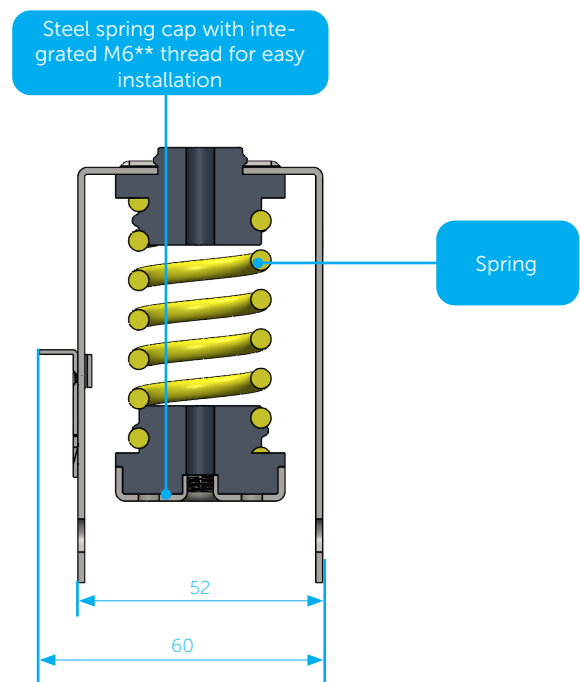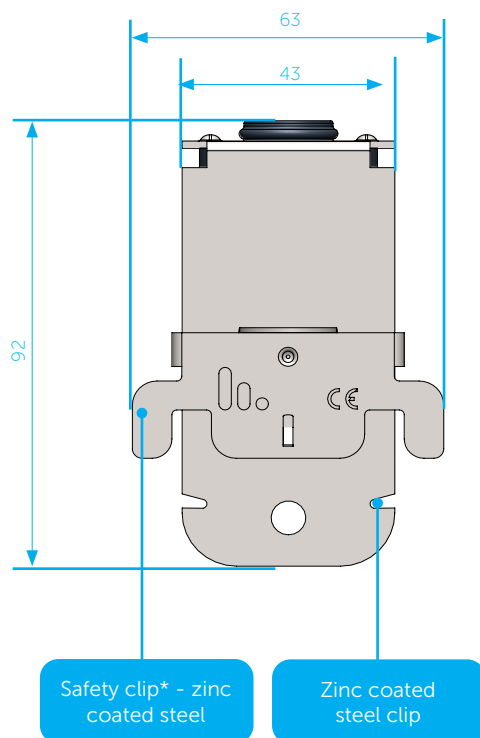

Notes:


All dimensions in millimeters (mm).

*Available with double safety clip, upon request.


**Available in M8, upon request.



Deflection as Function of Load

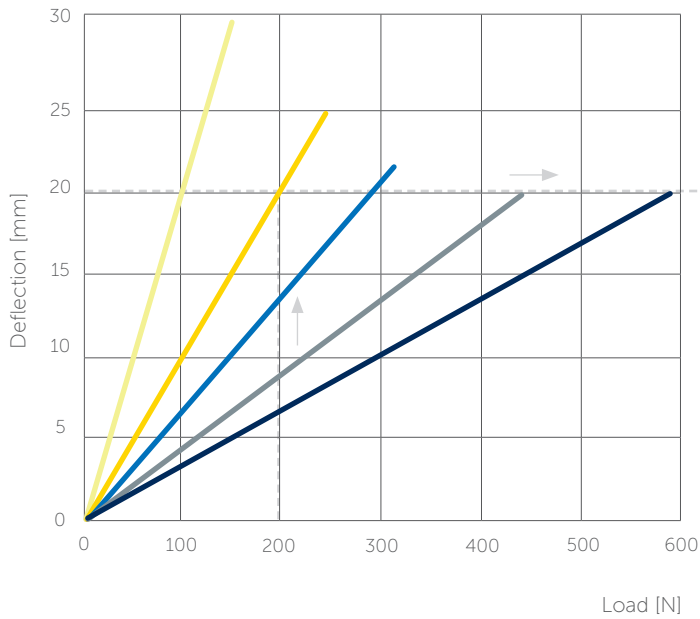

Relationship between Deflection and Resonance Frequency

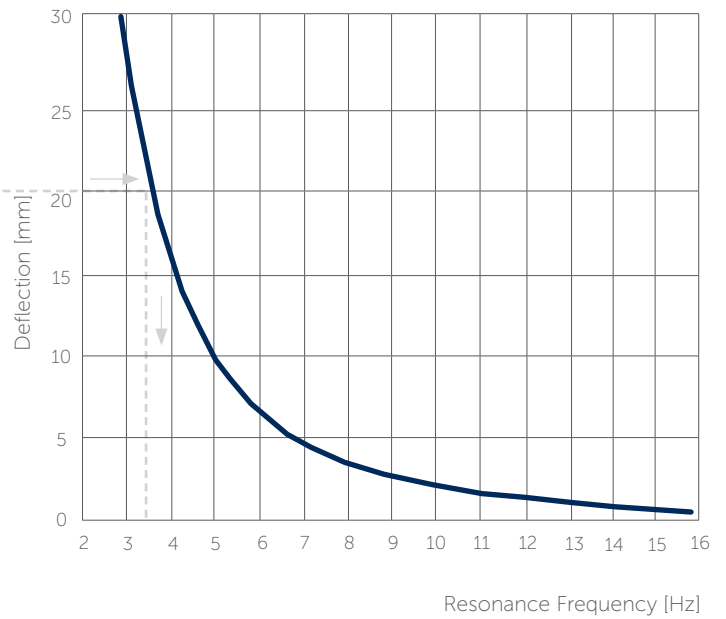


● Stravilink CC40-S75 ● Stravilink CC40-S150 ● Stravilink CC40-S230 ● Stravilink CC40-S340 ● Stravilink CC40-S455



The resonance frequency of a Stravilink hanger can be determined by its load. To start the calculation use the graph "deflection as function of load" this will provide the deflection at the specified load. Then moving horizontally to the right hand side plot "deflection as function of frequency" on which the corresponding resonance frequency can be found. As an example, the resonance frequency of a Stravilink CC40-S150 loaded with 200 N is determined. The corresponding deflection is 20 mm. The resonance frequency of a spring at 20 mm deflection is 3.5 Hz.




ACCESSORIES



Perimeter Strip

Self-adhesive perimeter strip 10 mm thick to isolate the ceiling from the adjacent walls.

Note: Standard widths of 50 mm, 100 mm, and 150 mm are available in 10 lm rolls.




C47 channel


47 mm wide channel of 3 m available

Material: DX51D+Z140

Weight: 1.34 kg

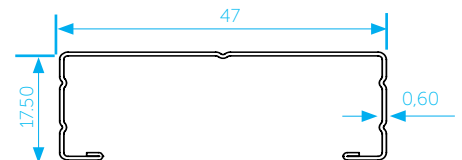

Note: All dimensions in millimeters (mm).

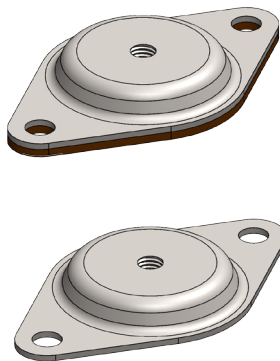


M6 anchor plate


Available with (for settlement on rough surfaces) or without rubber (2 mm)

Material: DX51D+S275

Admissible load of steel element: 3090 N

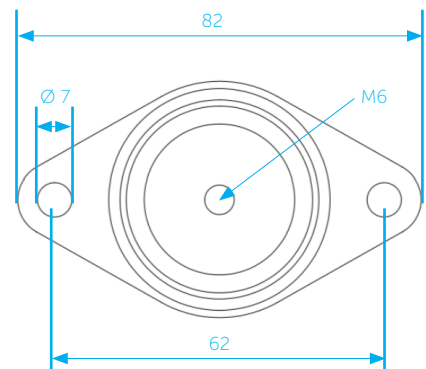

Note: All dimensions in millimeters (mm).




Stravilink CC40 safety clip

Material: DX51D+S275

Quantity per bag: 25

Note: One safety clip is included with the product by default.

A second is available upon request.



Channel-47 connector

Used to join two sections of channel in ceiling systems, for 47 mm ceiling channels.

Weight: 26 g

Quantity per box: 100


Material: DX51D+Z140

All accessories listed on our Stravilink solution datasheets are not included by default with the standard solution. These are necessary or optional installation accessories that can be supplied by CDM Stravitec upon request, but at an additional cost.




TYPICAL ASSEMBLIES

Single ceiling profile and increased void

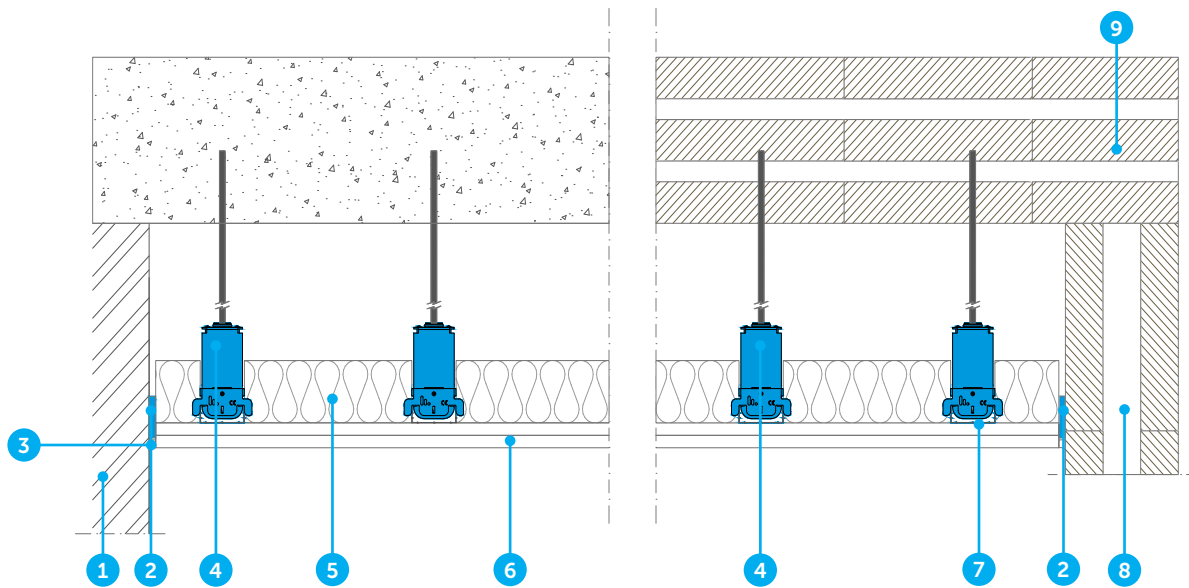

Single ceiling profile and reduced void

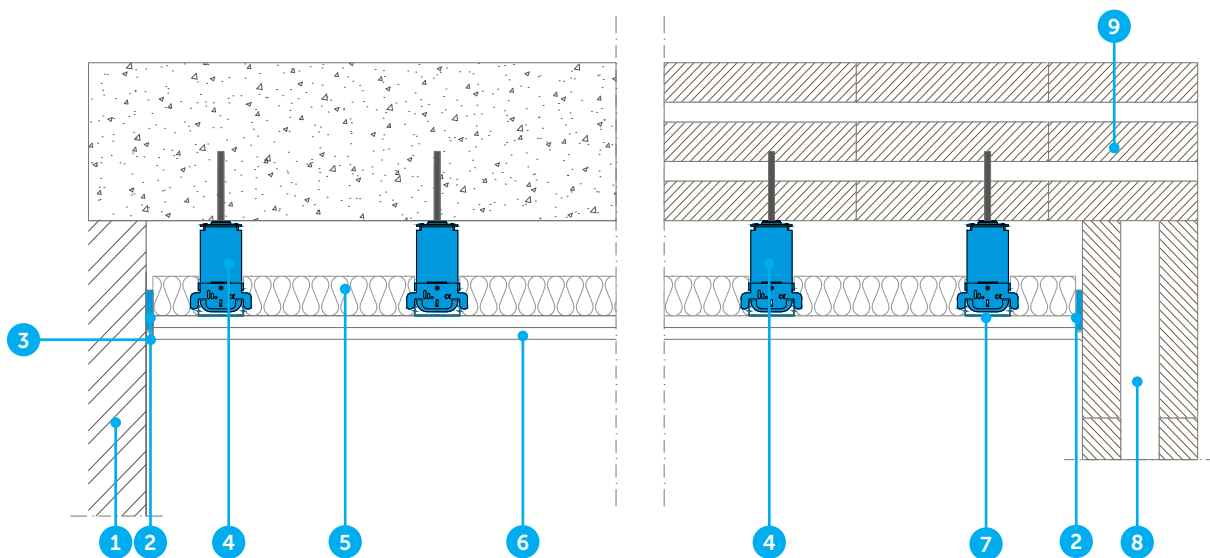

1. Wall
2. Perimeter Strip
3. Elastic caulk
4. Stravilink CC40-S
5. Absortion layer

6. Plasterboards, gypsum board or dry lining
7. 47 mm channel
8. CLT Wall
9. CLT Slab

DISCLAIMER

This information is accurate to the best of our knowledge at the time of issue. Information, data and recommendations provided are based on industry accepted testing and prior product usage. It is intended as descriptive of the general capabilities and performance of our products and does not endorse applicability for any particular project. We reserve the right to change products, performance, and data without notice. This document replaces all information supplied prior to the publication hereof.